



epd-norge.no
The Norwegian EPD Foundation

ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:	Glava AS
Program operator:	The Norwegian EPD Foundation
Publisher:	The Norwegian EPD Foundation
Declaration number:	NEPD-1696-683-EN
Registration number:	NEPD-1696-683-EN
ECO Platform reference number:	-
Issue date:	28.01.2019
Valid to:	28.01.2024

Glava glass wool

Glava AS



For norske forhold

www.epd-norge.no



General information

Product:

Glava glass wool

Program operator:

The Norwegian EPD Foundation
P.O. Box 5250 Majorstuen N-0303 Oslo Norway
Phone: +47 977 22 020
e-mail: post@epd-norge.no

Declaration number:

NEPD-1696-683-EN

ECO Platform reference number:**This declaration is based on Product Category Rules:**

CEN Standard EN 15804 serves as core PCR
NPCR Construction products and services - Part A and NPCR
012 version 2 PCR-Part B for Thermal insulation
products

Statement of liability:

The owner of the declaration shall be liable for the
underlying information and evidence. EPD Norway shall
not be liable with respect to manufacturer information, life
cycle assessment data and evidences.

Scope:

Cradle to Grave

Declared unit:

1 m² of 34 mm thick Glava glass wool insulation material with
a density of 17.5 kg/m³ and a thermal resistance of 1.0 Km²W⁻¹.

Functional unit:

1 m² of 34 mm thick Glava glass wool insulation material with
a density of 17.5 kg/m³, thermal resistance of 1.0 Km²W⁻¹ and
a reference service lifetime of 60 years.

Verification:

The CEN Norm EN 15804 serves as the core PCR.
Independent verification of the declaration and data, according
to ISO14025:2010



internal



external

Third party verifier:

Marte Leenaas

(Independent verifier approved by EPD Norway)

Owner of the declaration:

Glava AS
Contact person: John Arne Bakke
Phone: +47 95 14 78 20
e-mail: john.a.bakke@glava.no

Manufacturer:

Glava AS
Nybråtveien 2, 1801 Askim, Norge
Phone: +47 69818400
e-mail: post@glava.no

Place of production:

Askim, Norway

Management system:

ISO 9001:2008 and ISO 14001

Organisation no:

912008754

Issue date:

28.01.2019

Valid to:

28.01.2024

Year of study:

2017-2018

Comparability:

EPD of construction products may not be comparable if they
not comply with EN 15804 and seen in a building context.

The EPD has been worked out by:

Selamawit Mamo Fufa

Selamawit M. Fufa



SINTEF

Approved

Håkon Hauan

Håkon Hauan
Managing Director of EPD-Norway

Product

Product description:

Glava glass wool insulation materials are mainly manufactured from recycled glass (52%). The products are used to insulate against cold, heat, fire and sound. They can be used in buildings, industrial installations, road, rail and marine constructions.

Product specification:

The calculations are based on the 1 m² of 34 mm thick Glava glass wool insulation material with a density of 17.5 kg/m³ and a thermal resistance of 1.0 Km²W⁻¹ (Table 1).

Table 1. Composition of the final product

Materials	kg	%
Sand and other minerals	0,214	36
Recycled resources	0,312	52
Binders	0,061	10
Dust binding oil	0,008	1
Sum of materials	0,595	100
Wood packaging	0,026	
Plastic packaging	0,012	
Total with packaging	0,74	

Glava glass wool insulation materials are produced in different thicknesses and densities. The environmental impact of each product can be estimated by multiplying with the factors give in Table 2. Some products are coated or covered with paper. The impact from these extra features are not covered in this EPD.

Table 2. Factors used to estimate the environmental impact for each glass wool products

Thickness (mm)	12 kg	17 kg	25 kg	28 kg	35 kg	48 kg	60 kg	80 kg	90 kg	116 kg	130 kg
20	0,4	0,6	0,9	1,0	1,2	1,7	2,1	2,9	3,2	4,1	4,6
25	0,5	0,8	1,1	1,2	1,6	2,1	2,7	3,6	4,0	5,2	5,8
30	0,6	0,9	1,3	1,5	1,9	2,6	3,2	4,3	4,8	6,2	7,0
40	0,9	1,2	1,8	2,0	2,5	3,4	4,3	5,7	6,4	8,3	9,3
50	1,1	1,5	2,2	2,5	3,1	4,3	5,3	7,1	8,0	10,3	11,6
60	1,3	1,8	2,7	3,0	3,7	5,1	6,4	8,6	9,6	12,4	13,9
70	1,5	2,1	3,1	3,5	4,4	6,0	7,5	10,0	11,2	14,5	16,2
75	1,6	2,3	3,3	3,7	4,7	6,4	8,0	10,7	12,0	15,5	17,4
80	1,7	2,4	3,6	4,0	5,0	6,8	8,6	11,4	12,8	16,5	18,5
100	2,1	3	4,5	5,0	6,2	8,6	10,7	14,3	16,0	20,7	23,2
120	2,6	3,6	5,3	6,0	7,5	10,3	12,8	17,1	19,3	24,8	27,8
125	2,7	3,8	5,6	6,2	7,8	10,7	13,4	17,8	20,1	25,8	29,0
140	3	4,2	6,2	7,0	8,7	12,0	15,0	20,0	22,5	28,9	32,4
150	3,2	4,5	6,7	7,5	9,4	12,8	16,0	21,4	24,1	31,0	34,8
170	3,6	5,2	7,6	8,5	10,6	14,5	18,2	24,2	27,3	35,2	39,4
175	3,7	5,3	7,8	8,7	10,9	15,0	18,7	25,0	28,1	36,2	40,6
180	3,9	5,5	8	9,0	11,2	15,4	19,3	25,7	28,9	37,2	41,7
200	4,3	6,1	8,9	10,0	12,5	17,1	21,4	28,5	32,1	41,4	46,3
220	4,7	6,7	9,8	11,0	13,7	18,8	23,5	31,4	35,3	45,5	51,0
240	5,1	7,3	10,7	12,0	15,0	20,5	25,7	34,2	38,5	49,6	55,6
250	5,3	7,6	11,1	12,5	15,6	21,4	26,7	35,7	40,1	51,7	57,9
280	6	8,5	12,5	14,0	17,5	24,0	29,9	39,9	44,9	57,9	64,9
300	6,4	9,1	13,4	15,0	18,7	25,7	32,1	42,8	48,1	62,0	69,5
340	7,3	10,3	15,2	17,0	21,2	29,1	36,4	48,5	54,5	70,3	78,8
350	7,5	10,6	15,6	17,5	21,8	29,9	37,4	49,9	56,1	72,4	81,1
380	8,1	11,5	16,9	19,0	23,7	32,5	40,6	54,2	61,0	78,6	88,1
390	8,3	11,8	17,4	19,5	24,3	33,4	41,7	55,6	62,6	80,6	90,4
410	8,8	12,4	18,3	20,5	25,6	35,1	43,9	58,5	65,8	84,8	95,0

Category 12 kg: Økonomi 38 Products

Category 17 kg: Proff 34 products, Marine wire mat alu*, Marine roll 16, Marine slab 16, Vintermatte*, Dyttestrimmel, Sydd matte*

Category 25 kg: Extrem 32 products, Laftestrimmel, Blåseull (åpent blåst), Plussplate

Category 28 kg: Murplate 32 and Lamellmatte*

Category 35 kg: Ventilasjonsplate, Lydfelleplate 2000

Category 48 kg: Veggplate 31, blåseull (lukket hulrom), GLAVA Akuduk Products*

Category 60 kg: Glava Robust Lamell, Lydstopplate

Category 80 kg: Glava Venus A*, Glava Super Nova*

Category 90 kg:

Category 116 kg: Glava Venus E*, Trinnlydplate

Category 130 kg:

*Products with facing

LCA: Calculation rules

Declared unit:

1 m² of 34 mm thick Glava glass wool insulation material with a density of 17.5 kg/m³ and a thermal resistance of 1.0 Km²W⁻¹, from raw material extraction (A1) to the factory gate (A3).

System boundary:

Modules A1-A5, B1-B5 and C1-C4 are included in the analysis. Module B6 and B7 are not relevant in accordance with NPCR 012 version 2. Figure 1 shows the system boundary considered in the analysis.

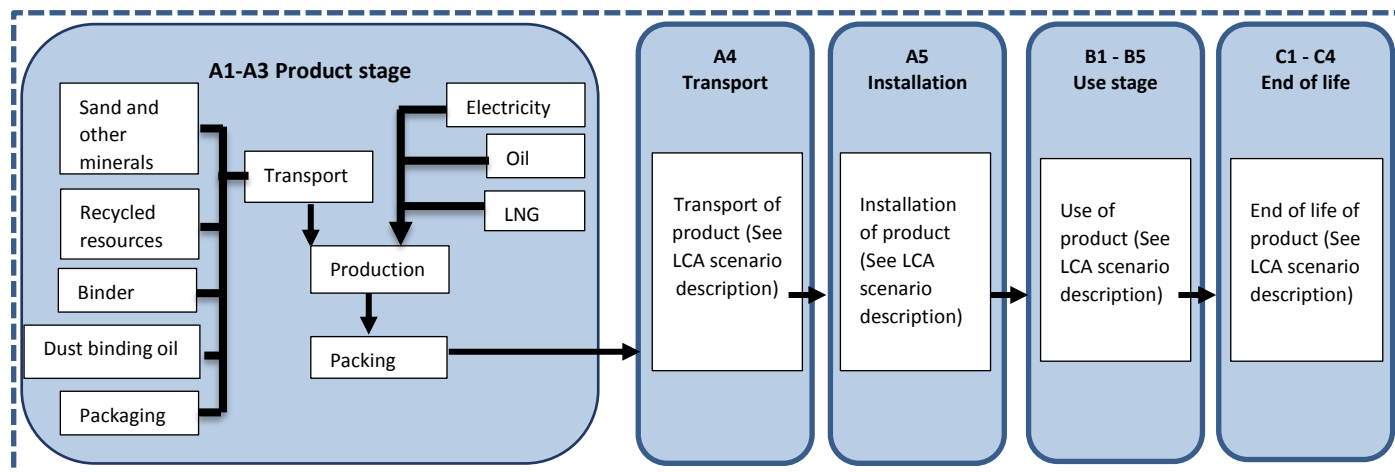


Figure 1: System boundary

Data quality:

The data quality requirements are according to EN 15804:2012+A1:2013 clause 6.3.6. Specific data collected from manufacturer is applied for the most important raw materials in A1. Specific data from the 2016 production at the manufacturing site is applied in A3. The production data of Glava insulation material is from one production site, Aksim in Norway, so no average data has been used for different locations. Missing data were substituted with generic data from Ecoinvent v.3.3. No data are more than 5 years old.

Cut-off criteria:

General cut-off criteria are given in standard EN 15804:2012+A1:2013 clause 6.3.5. In compliance with these criteria, all major raw materials and all the essential energy are included. The production process for raw materials and energy flows with very small amounts (<1%) are not included. This includes infrastructure of the manufacturing site, some de-dusting materials and facing materials (used in some products). This cut-off rule does not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance to EN 15804:2012+A1:2013. Energy, water and waste consumption in the factory is allocated to the FU by mass allocation. Effects of primary production of recycled materials are allocated to the main product in which the material was used.

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport from production place to user (A4)

Type	Destination	Capacity utilisation (incl. return) %**	Type of vehicle	Distance km	Fuel/Energy consumption	Unit
Truck	Norway	53	Lorry >32 tons, EURO5	300	0,02	l/tkm

An average transport distance of 300km is considered in accordance with the default distance given in NPCR 012 version 2.0. This is a representative transport distance to the building site in Norway.

Assembly (A5)

	Unit	Value
Auxiliary materials	kg	0
Water consumption	m ³	0
Electricity consumption	kWh	0
Other energy carriers	kWh	0
Material loss	kg	0
Output materials from waste treatment	kg	0,04
Dust in the air	kg	0

The Energy usage and loss of material during installation (A5) is assumed to be negligible. The packaging waste treatment is considered in the calculation.

Use (B1)

	Unit	Value
No LCA-related environmental impacts		0

There is no environmental related impact (B1) by the insulation material during the service life.

Maintenance (B2)/Repair (B3)

	Unit	Value
Maintenance cycle*	kg	0
Auxiliary	kg	0
Other resources	kg	0
Water consumption	m ³	0
Electricity consumption	kWh	0
Other energy carriers	MJ	0
Material loss	kg	0

In normal use scenario, it is assumed that there is no maintenance (B2), repair (B3), replacement (B4) and refurbishment (B5) is needed.

Replacement (B4)/Refurbishment (B5)

	Unit	Value
Replacement cycle*	Yr	60

* Number or RSL (Reference Service Life)

Operational energy (B6) and water consumption (B7)

	Unit	Value
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Power output of equipment	kW	

Insulation materials require no energy (B6) or water (B7) to operate.

End of Life (C1, C3, C4)

	Unit	Value
Hazardous waste disposed	kg	0
Collected as mixed construction waste	kg	0,595
Reuse	kg	0
Recycling	kg	0
Energy recovery	kg	0
To landfill	kg	0,595

End-of-life life scenario, C1, C3 and C4, is based on materials being separated on site. Energy use for deconstruction in C1 is considered insignificant. The mineral wool is assumed to be 100% landfilled (C4).

Transport to waste processing (C2)

Type	Destination	Capacity utilisation (incl. return) %**	Type of vehicle	Distance km	Fuel/Energy consumption	Unit
Truck	To landfill	53	Lorry >32 tons, EURO5	25	0,02	l/tkm

The transport in C2 represents transport to disposal site in Norway.

** The capacity utilization factors for truck are calculated from Ecoinvent v3.1. Capacity utilisation factors for boat are from Ecoinvent v2.2 report 14: Transport Services (Kolle et al., 1991) (Knørr et al., 2000)

LCA: Results

Life cycle impact assessment results represent the environmental impacts of Glava glass wool insulation with 34mm thickness.

System boundaries (X=included, MND= module not declared, MNR=module not relevant)

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	X	X	X	X	X	MNR	MNR	X	X	X	X	MND

Environmental impact

Parameter	Unit	A1-A3	A4	A5	B1-B5	C1	C2	C3	C4
GWP	kg CO ₂ -eqv	4,30E-01	1,71E-02	3,83E-02	0,00E+00	0,00E+00	1,34E-03	0,00E+00	3,23E-03
ODP	kg CFC11-eqv	2,37E-08	3,29E-09	6,14E-11	0,00E+00	0,00E+00	2,57E-10	0,00E+00	1,07E-09
POCP	kg C ₂ H ₄ -eqv	1,70E-04	2,87E-06	4,32E-07	0,00E+00	0,00E+00	2,25E-07	0,00E+00	1,18E-06
AP	kg SO ₂ -eqv	1,38E-03	5,81E-05	9,02E-06	0,00E+00	0,00E+00	4,55E-06	0,00E+00	2,46E-05
EP	kg PO ₄ ³⁻ -eqv	4,23E-04	1,27E-05	9,94E-06	0,00E+00	0,00E+00	9,92E-07	0,00E+00	5,42E-06
ADPM	kg Sb-eqv	7,25E-07	3,21E-08	1,06E-09	0,00E+00	0,00E+00	2,52E-09	0,00E+00	3,36E-09
ADPE	MJ	4,42E+00	2,66E-01	5,06E-03	0,00E+00	0,00E+00	2,09E-02	0,00E+00	9,03E-02

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Resource use

Parameter	Unit	A1-A3	A4	A5	B1-B5	C1	C2	C3	C4
RPEE	MJ	5,25E+00	3,90E-03	4,64E-04	0,00E+00	0,00E+00	3,05E-04	0,00E+00	2,18E-03
RPEM	MJ	5,06E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
TPE	MJ	5,76E+00	3,90E-03	4,64E-04	0,00E+00	0,00E+00	3,05E-04	0,00E+00	2,18E-03
NRPE	MJ	4,51E+00	2,72E-01	6,77E-03	0,00E+00	0,00E+00	2,13E-02	0,00E+00	9,18E-02
NRPM	MJ	3,56E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
TRPE	MJ	4,86E+00	2,72E-01	6,77E-03	0,00E+00	0,00E+00	2,13E-02	0,00E+00	9,18E-02
SM	kg	3,12E-01	INA	INA	INA	INA	INA	INA	INA
RSF	MJ	INA	INA	INA	INA	INA	INA	INA	INA
NRSF	MJ	INA	INA	INA	INA	INA	INA	INA	INA
W	m3	2,16E+00	1,45E-02	2,49E-03	0,00E+00	0,00E+00	1,13E-03	0,00E+00	2,89E-03

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

INA = Indicator not assessed

End of life - Waste

Parameter	Unit	A1-A3	A4	A5	B1-B5	C1	C2	C3	C4
HW	kg	5,00E-05	INA	INA	INA	INA	INA	INA	INA
NHW	kg	2,94E-02	INA	3,73E-02	INA	INA	INA	INA	5,95E-01
RW	kg	INA	INA	INA	INA	INA	INA	INA	INA

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

End of life - Output flow

Parameter	Unit	A1-A3	A4	A5	B1-B5	C1	C2	C3	C4
CR	kg	INA	INA	INA	INA	INA	INA	INA	INA
MR	kg	INA	INA	INA	INA	INA	INA	INA	INA
MER	kg	INA	INA	INA	INA	INA	INA	INA	INA
EEE	MJ	INA	INA	INA	INA	INA	INA	INA	INA
ETE	MJ	INA	INA	INA	INA	INA	INA	INA	INA

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009

Additional Norwegian requirements

Greenhouse gas emission from the use of electricity in the manufacturing phase

Norwegian production mix from import, high Voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing prosess (A3).

Data source	Amount	Unit
Econinvent v3.3 (2016)	29,2	gCO ₂ -eqv/kWh

Dangerous substances

- ☒ The product contains no substances given by the REACH Candidate list or the Norwegian priority list
- ☐ The product contains substances given by the REACH Candidate list or the Norwegian priority list that are less than 0,1 % by weight.
- ☐ The product contain dangerous substances, more then 0,1% by weight, given by the REACH Candidate List or the Norwegian Priority list, see table.
- ☐ The product contains no substances given by the REACH Candidate list or the Norwegian priority list. The product is classified as hazardous waste (Avfallsforskriften, Annex III), see table.

Indoor environment

The product meets the requirements for low emissions (class II) of formaldehyde, TVOC and CMR according to EN15251: 2007 National Appendix NA 4.

Carbon footprint

Carbon footprint has not been worked out for the product.

Bibliography

ISO 14020:2000	<i>Environmental labels and declarations - General principles</i>
ISO 14025:2010	<i>Environmental labels and declarations - Type III environmental declarations - Principles and procedures</i>
ISO 14044:2006	<i>Environmental management - Life cycle assessment - Requirements and guidelines</i>
EN 15804:2012+A1:2013	<i>Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products</i>
ISO 21930:2007	<i>Sustainability in building construction - Environmental declaration of building products</i>
EN 15251:2007	<i>Indoor environmental input parameters for design and assessment of energy performance of buildings</i>
ISO 9001: 2008	<i>Quality management system - Requirements</i>
EN 16485:2014	<i>Round and sawn timber - Environmental Product Declarations - Product category rules for wood and wood-based products for use in construction</i>
EN 16449:2014	<i>Wood and wood-based products - Calculation of the biogenic carbon content of wood and conversion to carbon dioxide</i>
Fufa, S.M.: 2017	LCA-report for Glava glasswool insulation material. Report nr. 2018:00933 from Sintef

Building and Infrastructure, Oslo, Norway.

NPCR 012 version 2.0: 2018

PCR - Part B for Thermal insulation products

PCR Part A: 2017

PCR - Part A Construction products and services

Ecoinvent v3.3

Swiss Centre of Life Cycle Inventories. www.ecoinvent.ch

Spielmann, M., Bauer, C., Dones, R., Tuchschild, M.

Ecoinvent report no.14: Transport Services, 2007

 epd-norge.no The Norwegian EPD Foundation	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway	Phone: +47 977 22 020 e-mail: post@epd-norge.no web: www.epd-norge.no
 For norske forhold	Owner of the declaration Glava AS Sandstuveien 68, 6211 Etterstad, Norway	Phone: +47 9514 78 20 Fax e-mail: post@glava.no web: www.glava.no
	Author of the Life Cycle Assessment Selamawit Mamo Fufa SINTEF Building and Infrastructure Forskningsveien 3b Pb 124 Blindern, 0314 Oslo	Phone: + 47 46 63 47 00 e-mail: selamawit.fufa@sintef.no web: www.sintef.no