

designated according to Article 29 of the Regulation (EU) No 305/2011 and member of EOTA (European Organisation for Technical Assessment, www.eota.eu)

European Technical Assessment

ETA 24/0330
of 04/12/2024

Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: **UL International (Netherlands) B.V.**

Trade name of the construction product Mulcol® Multicollar *Slim*

Product family to which the construction product belongs Fire Stopping and Sealing Product:
• Penetration Seals

Manufacturer Mulcol International BV
Promenade 75
5401GM Uden
The Netherlands

Manufacturing plant(s) L/002
E/002

This European Technical Assessment contains 281 pages including 3 Annexes which form an integral part of this assessment.

This European Technical Assessment is issued in accordance with regulation (EU) No 305/2011, on the basis of EAD 350454-00-1104, September 2017

This version replaces ETA 24/0330 issued on 16/09/2024

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

I.	SPECIFIC PARTS OF THE EUROPEAN TECHNICAL ASSESMENT	3
1.	Technical description of the product	3
2.	Specification of the intended uses of the product in accordance with the applicable European Assessment Document (hereinafter EAD): EAD 350454-00-1104	3
3.	Performance of the product and references to the methods used for its assessment	5
4.	Assessment and Verification of Constancy of Performance (hereinafter AVCP) applied, with reference to its legal base	6
5.	Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD	6
Annex A - Flexible and rigid walls		14
Annex B - Rigid floors		159
Annex C - General		258

I. SPECIFIC PARTS OF THE EUROPEAN TECHNICAL ASSESSMENT

1. Technical description of the product

- 1) Mulcol® Multicollar *Slim* is a pipe closure device used to reinstate the fire resistance performance of wall and floor constructions where they have been provided with apertures for the penetration of single or multiple services.
- 2) Mulcol® Multicollar *Slim* is supplied with a 30 by 12 mm intumescent liner within a stainless steel spine, to be closed around the service and fixed to the supporting element.
- 3) The products below can be used in conjunction with Mulcol® Multicollar *Slim* depending upon the required application and classification (see Annex A/B). These products are subject to separate ETAs.
 - Mulcol® Multimastic FB, Firestop board
 - Mulcol® Multimortar, Firestop mortar
 - Mulcol® Multimastic SP, Firestop mastic
 - Mulcol® Multisealant A, Firestop sealant
- 4) The annular gap around the service may be filled with Multisealant A, Multimastic SP or Multimortar. The annular gap between the pipe/insulation and the Multicollar *Slim* may be: ≤ 15 mm when the outer diameter is ≤ 125 mm, ≤ 5 mm when the outer diameter is ≥ 125 mm.
- 5) The applicant has submitted a written declaration that Mulcol® Multicollar *Slim* does not contain substances which have to be classified as dangerous according to Directive 67/548/EEC and Regulation (EC) No 1272/2008 and listed in the "Indicative list on dangerous substances" of the EGDS - taking into account the installation conditions of the construction product and the release scenarios resulting from there.

In addition to the specific clauses relating to dangerous substances contained in this European Technical Assessment, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Regulation, these requirements need also to be complied with, when and where they apply.

2. Specification of the intended uses of the product in accordance with the applicable European Assessment Document (hereinafter EAD): EAD 350454-00-1104

Detailed information and data is given in Annex A, B and C.

- 1) The intended use of Mulcol® Multicollar *Slim* is to reinstate the fire resistance performance of flexible, rigid, sand wick and CLT walls and rigid and CLT floor constructions where they are penetrated by various services.
- 2) The specific elements of construction that the system Mulcol® Multicollar *Slim* may be used to provide a penetration seal in, are as follows:
 - a) Flexible walls*: The wall must have a minimum thickness of 100 mm.
 - b) Rigid walls*: The wall must have a minimum thickness of 100 mm and comprise concrete, aerated concrete or masonry, with a minimum density of 400 kg/m³.
 - c) CLT walls: The wall must have a minimum thickness of 100 mm, with a mini minimum density of 376 kg/m³
 - d) Sandwich panel walls: The wall must have a minimum thickness of 100 mm, consisting of a stone wool core with a minimum density of 115 kg/m³
 - e) Rigid floors: The floor must have a minimum thickness of 150 mm and comprise aerated concrete or concrete with a minimum density of 400 kg/m³.
 - f) CLT floors: The floor must have a minimum thickness of 140 mm, with a mini minimum density of 350 kg/m³

* See Annex C for the field of application.

The supporting construction must be classified in accordance with EN 13501-2 for the required fire resistance period.

- 3) The system Mulcol® Multicollar *Slim* may be used to provide a penetration seal with services e.g. cables, metal pipes, composite pipes and plastic pipes, with and without insulation, with mixed services within the same seal/aperture (for details see Annex A and B).
- 4) The minimum permitted separation between adjacent seals/apertures is 100 mm when penetration seals are $\leq 300 \times 300$ mm, a separation of 200 mm is needed for larger seals.
- 5) The provisions made in this European Technical Assessment are based on an assumed working life of 25 years, provided that the conditions laid down in the product datasheet for the packaging/ transport/ storage/ installation/ use/repair are met. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.
- 6) Type Z₁; product intended for use at conditions exposed to free weathering.
- 7) Mutual distances between services and minimum support distances are given in Annex C.

- 8) Insulation types
The following acoustic insulation types are allowed (or equal):
- ABSound Sonocool
 - Jacomassa / Sonimass
 - Merfisol Silver Alu
 - ThermaCompact TF
- The following elastomeric insulation types are given in Annex A and B (or equal, not limited by brand or type):
- Reaction to fire class $\leq$ B-s1, d0 – e.g. ArmaFlex Ultima, Kaiflex KK Plus S1
 - Reaction to fire class $\leq$ B-s2, d0 – e.g. ArmaFlex AF EVO, Kaiflex KK Plus S2 / ST, K-Flex ST
 - Reaction to fire class $\leq$ B-s3, d0 – e.g. ArmaFlex AF / XG / SH, K-Flex H
 - Reaction to fire class $\leq$ C-s2, d0 – e.g. Kaiflex HT S2
 - Reaction to fire class $\leq$ D-s3, d0 – e.g. ArmaFlex NH / SH / HT
- The insulations may also have a B_L, C_L or D_L classification (linear insulation).
- 9) Pipes types
The following multi layered pipes (or equal) are allowed:
- Alpex DUO, Valsir Pexal, Valsir Mixal and APE Plain (PE-Xb/AL/PE-Xb)
 - Uponor and Geberit Mepla (PE-RT/AL/PE-RT)
 - Uponor and Henco (PE-Xc/AL/PE-Xc)
 - Uponor and REHAU (PE-Xa) and REHAU (PE-Xc)
 - SP Superpipe and POLYGON PEX (PE-X/AL/PE-X)
 - Valsir Pexal and Valsir Mixal (PE/AL/PE-Xb)
 - Wavin Tigris, Protecta-Line System and Alpex F50 Profi (PE-X/AL/PE)
 - Kelox Modulrohr
 - Kelox Plus-Rohr (PE-RT/AL/PE-RT)
- The following fibre composite pipes (or equal) are allowed:
- Aquatechnik Fusio PP-R 80, Aquatechnik Fusio PP-RCT
 - Aquatherm Blue-MF, Aquatherm Blue-S, Aquatherm Red-MF, Aquatherm Green-MF, Aquatherm Green-MS, Aquatherm Green-S, Aquatherm Lilac-S, Aquatherm Grey-MS and Aquatherm Orange M
 - Bänninger PP-R, Bänninger Climatec PP-RCT and Bänninger Watertec PP-RCT
- The following low-noise (Silent) pipes (or equal) are allowed:
- Coes PhoNoFire and Coestilen BluePower
 - Geberit Silent PP and Geberit Silent dB 20
 - Girpi Friaphon and Marley Silent
 - Pipelife Master 3 and PhonEX AS
 - Poloplast POLO-KAL NG and Poloplast POLO-KAL 3S
 - Skolan dB
 - Raupiano Plus
 - Valsir Triplus,
 - DykaSono
 - Uponor Decibel
 - Geberit Silent Pro
 - Wavin SiTech+
 - Wavin SiTech B1
 - Wavin AS

3. Performance of the product and references to the methods used for its assessment

Product-type: Fire collar		Intended use: Penetration Seal
Assesment method	Essential characteristic	Product Performance
<u>BWR 2 Safety in case of fire</u>		
EN 13501-1	Reaction to fire	E
EN 13501-2	Resistance to fire	Annex A, B & C
<u>BWR 3 Hygiene, health and enviroment</u>		
EN 1026	Air permeability	No performance determined
EAD 350454-00-1104, Annex C	Water permeability	No performance determined
Declaration of manufacturer & EN 16516	Release of dangerous substances	IA1, S/W 2 - Declaration of manufacturer
<u>BWR 4 Safety in use</u>		
EOTA TR 001:2003	Mechanical resistance and stability	No performance determined
EOTA TR 001:2003	Resistance to impact/movement	No performance determined
EOTA TR 001:2003	Adhesion	No performance determined
EAD 350454-00-1104, Clause 2.2.9	Durability	Z ₁
<u>BWR 5 Protection against noise</u>		
EN 10140-1,2,4,5 / EN ISO 7171-1	Airborne sound insulation	No performance determined
<u>BWR 6 Energy economy and theat retention</u>		
EN 12664, EN 12667, EN 12939, EN ISO 8990, EN ISO 6946, EN ISO 14683, EN ISO 10211, EN ISO 10456	Thermal properties	No performance determined
EN ISO 12572, EN 12086, EN ISO 10456	Water vapour permeability	No performance determined

4. Assessment and Verification of Constancy of Performance (hereinafter AVCP) applied, with reference to its legal base

According to the decision 1999/454/EC – Commission Decision of date 22nd June 1999 on the procedure for attesting the conformity of construction products pursuant to Article 20(2) of Council Directive 89/106/EEC as regards to fire stopping, fire sealing and fire protective products, published in the Official Journal of the European Union (OJEU) L178/52 of 14/07/1999, see <http://eur-lex.europa.eu/JOIndex.do> of the European Commission¹, as amended, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) given in the following table(s) applies (apply).

Product(s)	Intended use(s)	Level(s) or class(es)	System(s)
Fire stopping and Fire Sealing Products	For fire compartmentation and/or fire protection or fire performance	Any	1

5. Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

Tasks of the manufacturer:

Factory production control

The manufacturer shall exercise permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer shall be documented in a systematic manner in the form of written policies and procedures, including records of results performed. This production control system shall ensure that the product is in conformity with this European Technical Assessment.

The factory production control shall be in accordance with the Control Plan of 14th September 2023 relating to the European Technical Assessment ETA 24/0330 issued on 04/12/2024 which is part of the technical documentation of this European Technical Assessment. The “Control Plan” is laid down in the context of the factory production control system operated by the manufacturer and deposited at UL International (Netherlands) B.V.

The results of factory production control shall be recorded and evaluated in accordance with the provisions of the Control Plan.

Other tasks of the manufacturer:

Additional information

The manufacturer shall provide a technical data sheet and an installation instruction with the following minimum information:

(a) Technical data sheet:

- Field of application:
- Building elements for which the penetration seal is suitable, type and properties of the building elements like minimum thickness, density, and - in case of lightweight constructions - the construction requirements.
- Limits in size, minimum thickness etc. of the penetration seal
- Construction of the penetration seal including the necessary components and additional products (e.g. backfilling material) with clear indication whether they are generic or specific.
- Services which the penetration seal is suitable, type and properties of the services like material, diameter, thickness etc. in case of pipes including insulation materials; necessary/allowed supports/fixings (e.g. pipe trays)

(b) Installation instruction:

- Steps to be followed
- Procedure in case of retrofitting
- Stipulations on maintenance, repair and replacement

6. Issued on:

04-12-2024

Report by:

Verified by:

Validated by:



C. Johnson

D. Yates

Erik Teubler

Senior Staff Engineer

Staff Engineer

Head of TAB

Built Environment

Built Environment

Built Environment

For and on behalf of UL International (Netherlands) B.V.

Annex - Resistance to Fire Classification - Mulcol® Multicollar *Slim*

Annex A.1 - Flexible and rigid walls

A.1.1	Multimastic FB2 - 1x60 mm - Cables, trays and conduits	14
A.1.1.1	Multiple flexible conduits with cables	14
A.1.2	Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm - Cables, trays and conduits	15
A.1.2.1	Multiple flexible conduits with cables	15
A.1.3	Multimortar + Multimastic FB - ≥ 100 mm - Cables, trays and conduits	16
A.1.3.1	Multiple flexible conduits with cables	16
A.1.4	Multimortar - ≥ 100 mm - Cables, trays and conduit	17
A.1.4.1	Multiple flexible conduits with cables	17
A.1.5	Directly through wall - ≥ 100 mm - Cables, trays and conduits	18
A.1.5.1	Electrical cables	18
A.1.5.2	Multiple PVC conduits	19
A.1.5.3	Multiple flexibles conduits with cables	20
A.1.6	Multimastic FB1 - 2x50 mm - Combustible pipes	21
A.1.6.1	Plastic pipes	21
A.1.6.2	Multiple plastic pipes	23
A.1.6.3	Plastic pipes perpendicular to 45°	24
A.1.6.4	Plastic pipes (Silent)	25
A.1.6.5	PP-R Multilayer pipes	26
A.1.6.6	PP-R Multilayer pipes - Elastomer LI 300 / CI	27
A.1.6.7	Drinks tubing system	28
A.1.6.8	Rectangular plastic duct	29
A.1.7	Multimastic FB2 - 1x60 mm - Combustible pipes	30
A.1.7.1	Plastic pipes	30
A.1.7.2	Plastic pipes (Silent)	31
A.1.8	Multimortar + Multimastic FB - ≥ 100 mm - Combustible pipes	32
A.1.8.1	Plastic pipes	32
A.1.8.2	Plastic pipes perpendicular to 45°	33
A.1.8.3	PP-R Multilayer pipes	34
A.1.8.4	Drinks tubing system	35
A.1.8.5	Rectangular plastic duct	36
A.1.9	Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm - Combustible pipes	37
A.1.9.1	Plastic pipes	37
A.1.9.2	Plastic pipes perpendicular to 45°	38
A.1.9.3	PP-R Multilayer pipes	39
A.1.9.4	Drinks tubing system	40
A.1.9.5	Rectangular plastic duct	41
A.1.10	Multimortar - ≥ 100 mm - Combustible pipes	42
A.1.10.1	Plastic pipes	42
A.1.10.2	Plastic pipes perpendicular to 45°	44
A.1.10.3	Plastic pipes with elbow	45
A.1.10.4	Plastic pipes with elbow and U-shape Multicollar <i>Slim</i>	46
A.1.10.5	Plastic pipes (Silent)	47
A.1.10.6	Plastic pipes (Silent) with moulded socket	48
A.1.10.7	Plastic pipes (Silent) with elbow and U-shape Multicollar <i>Slim</i>	49
A.1.10.8	Plastic pipes (Silent) in corner	50
A.1.10.9	PP-R multilayer pipes	51
A.1.10.10	PP-R multilayer pipes with elbow	52
A.1.10.11	Drinks tubing system	53
A.1.10.12	Rectangular plastic duct	54
A.1.11	Directly through wall - ≥ 100 mm - Combustible pipes	55
A.1.11.1	Plastic pipes	55
A.1.11.2	Plastic pipes perpendicular to 45°	57
A.1.11.3	Plastic pipes - Elastomer LS 450 / CS	58
A.1.11.4	Plastic pipes - Elastomer LI 450 / CI	59
A.1.11.5	Plastic pipes with socket	60
A.1.11.6	Plastic pipes with elbow	61
A.1.11.7	Plastic pipes with elbow and U-shape Multicollar <i>Slim</i>	62
A.1.11.8	Plastic pipes in corner	63
A.1.11.9	Plastic pipes at zero distance to floor	64
A.1.11.10	Plastic pipes in conduit	65
A.1.11.11	Plastic pipes - Steel half shell support	66
A.1.11.12	Plastic pipes (Silent)	67
A.1.11.13	Plastic pipes (Silent) with socket	68
A.1.11.14	Plastic pipes (Silent) with elbow	69
A.1.11.15	Plastic pipes (Silent) in corner	70
A.1.11.16	PP-R Multilayer pipes	71

A.1.11.17	PP-R Multilayer pipes - Elastomer LS 500 / CS	72
A.1.11.18	PP-R Multilayer pipes - Elastomer LI 300 / CI	73
A.1.11.19	PP-R Multilayer pipes with elbow	74
A.1.11.20	PP-R Multilayer pipes - Steel half shell support	75
A.1.11.21	PP-R Multilayer at zero distance to floor	76
A.1.11.22	PP-R Multilayer pipes at zero distance to floor - Elastomer LS 300 / CS	77
A.1.11.23	PE Pipe insulated PIR	78
A.1.11.24	Rubber cool-water hose	79
A.1.12	Multimastic FB1 - 2x50 mm - Multilayer pipes (MLC)	80
A.1.12.1	Multilayer pipes (MLC)	80
A.1.12.2	Multilayer pipes (MLC) - double Multicollar <i>Slim</i>	81
A.1.12.3	Multilayer pipes (MLC) - Elastomer LI 300 / CI	82
A.1.12.4	Multilayer pipes (MLC) - Phenolic foam LS 400 / CS	83
A.1.12.5	Multiple Multilayer pipes (MLC) - PE foam	84
A.1.13	Multimortar + Multimastic FB - ≥ 100 mm - Multilayer pipes (MLC)	85
A.1.13.1	Multilayer pipes (MLC)	85
A.1.13.2	Multilayer pipes (MLC) - double Multicollar <i>Slim</i>	86
A.1.13.3	Multilayer pipes (MLC) - Phenolic foam	87
A.1.13.4	Multiple Multilayer pipes (MLC) - PE foam	88
A.1.14	Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm - Multilayer pipes (MLC)	89
A.1.14.1	Multilayer pipes (MLC)	89
A.1.14.2	Multilayer pipes (MLC) - double Multicollar <i>Slim</i>	90
A.1.14.3	Multilayer pipes (MLC) - Phenolic foam	91
A.1.14.4	Multiple Multilayer pipes (MLC) - PE foam	92
A.1.15	Multimortar - ≥ 100 mm - Multilayer pipes (MLC)	93
A.1.15.1	Multilayer pipes (MLC)	93
A.1.15.2	Multilayer pipes (MLC) - double Multicollar <i>Slim</i>	94
A.1.15.3	Multilayer pipes (MLC) - Phenolic foam	95
A.1.15.4	Multiple Multilayer pipes (MLC) - PE foam	96
A.1.16	Directly through wall - ≥ 100 mm - Multilayer pipes (MLC)	97
A.1.16.1	Multilayer pipes (MLC)	97
A.1.16.2	Multilayer pipes (MLC) - double Multicollar <i>Slim</i>	98
A.1.16.3	Multilayer pipes (MLC) - PE conduit LS 50 / CS	99
A.1.16.4	Multilayer pipes (MLC) - PE conduit LS-LI 300 / CS-CI	100
A.1.16.5	Multilayer pipes (MLC) - Elastomer LS-LI 500 / CS-CI	101
A.1.16.6	Multilayer pipes (MLC) at zero distance to floor	102
A.1.16.7	Multilayer pipes (MLC) at zero distance to floor - Elastomer LS-LI 300 / CS-CI	103
A.1.16.8	Multiple Multilayer pipes (MLC) - PE Foam LS-LI 300 / CS-CI	104
A.1.16.9	Multiple Multilayer pipes (MLC) at zero distance to floor - Elastomer LS-LI 300 / CS-CI	105
A.1.16.10	Multiple Multilayer pipes (MLC) at zero distance to floor - Elastomer, PE Foam, PE conduit LS-LI 300 / CS-CI	106
A.1.17	Multimastic FB1 - 2x50 mm - Metal pipes insulated mineral wool	107
A.1.17.1	Steel pipes - Multimastic FB1 - Glass wool LS 400 / CS	107
A.1.18	Multimortar - ≥ 100 mm - Metal pipes insulated mineral wool	108
A.1.18.1	Steel pipes - Multimortar - Glass wool LS 400 / CS	108
A.1.19	Directly through wall - ≥ 100 mm - Metal pipes insulated elastomer	109
A.1.19.1	Copper and steel pipes - Elastomer LS 500 / CS	109
A.1.19.2	Copper and steel pipes - Elastomer CI	110
A.1.19.3	Steel pipes - Elastomer CI	111
A.1.20	Directly through wall - ≥ 100 mm - Metal pipes insulated elastomer	112
A.1.20.1	Copper and steel pipes - PIR / PUR foam LS 500 / CS	112
A.1.20.2	Steel pipes - PIR / PUR foam LS 500 / CS	113
A.1.21	Multimastic FB1 - 2x50 mm - Multiple services	114
A.1.21.1	Airconditioning set	114
A.1.22	Multimastic FB2 - 1x60 mm - Multiple services	115
A.1.22.1	Airconditioning set	115
A.1.23	Multimortar + Multimastic FB - ≥ 100 mm - Multiple services	116
A.1.23.1	Airconditioning set	116
A.1.23.2	Multiple plastic pipes	117
A.1.24	Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm - Multiple services	118
A.1.24.1	Airconditioning set	118
A.1.24.2	Multiple plastic pipes	119
A.1.25	Multimortar - ≥ 100 mm - Multiple services	120
A.1.25.1	Airconditioning set	120
A.1.25.2	Multiple airconditioning sets	121
A.1.25.3	Multiple plastic pipes	122

A.1.26	Directly through wall - ≥ 100 mm - Multiple services	123
A.1.26.1	Multiple pipes and cables	123
A.1.26.2	Multiple pipes and cables - Elastomer LS-LI 300 / CS-CI	124
A.1.26.3	Airconditioning set	125
A.1.26.4	Multiple plastic pipes	126
A.1.27	Directly through wall - ≥ 100 mm - Flue gas pipes	127
A.1.27.1	Aluminium flue gas pipes	127
A.1.27.2	Concentric steel flue gas pipes	128
A.1.27.3	Plastic flue gas pipes	129
A.1.27.4	Concentric plastic flue gas pipes	130

Annex A.2 - Rigid walls

A.2.1	Directly through wall - ≥ 70 mm - Flue gas pipes	131
A.2.1.1	Aluminium flue gas pipes	131
A.2.1.2	Concentric steel flue gas pipes	132
A.2.1.3	Plastic flue gas pipes	133
A.2.1.4	Concentric plastic flue gas pipes	134

Annex A.3 - CLT walls

A.3.1	Multimastic FB1 - 2x50 mm - Combustible pipes	135
A.3.1.1	Plastic pipes	135
A.3.1.2	Plastic pipes perpendicular to 45°	136
A.3.1.3	Plastic pipes perpendicular to 45° - double Multicollar <i>Slim</i>	137
A.3.1.4	PP-R multilayer pipes	138
A.3.1.5	Drinks tubing system	139
A.3.2	Directly through wall - ≥ 100 mm - Cables, trays and conduits	140
A.3.2.1	Multiple PVC conduits	140
A.3.2.2	Flexible conduit with cables	141
A.3.3	Directly through wall - ≥ 100 mm - Combustible pipes	142
A.3.3.1	Plastic pipes	142

Annex A.4 - Sandwich panel walls

A.4.1	Directly through wall - ≥ 100 mm - Cables, trays and conduits	143
A.4.1.1	Flexible conduit with cable	143
A.4.2	Multimastic FB1 - 2x 50 mm - Combustible pipes	144
A.4.2.1	Plastic pipes	145
A.4.2.2	Plastic pipes perpendicular to 45°	146
A.4.2.3	Plastic pipes perpendicular to 45° - double Multicollar <i>Slim</i>	147
A.4.2.4	Plastic pipes (Silent)	148
A.4.2.5	PP-R multilayer pipes	149
A.4.2.6	Drinks tubing system	150
A.4.2.7	PE Pipe insulated PIR	151
A.4.3	Multimastic FB1 Pattress fixed to wall - 2x50 mm - Combustible pipes	152
A.4.3.1	Plastic pipes	152
A.4.4	Directly through wall - ≥ 100 mm - Combustible pipes	153
A.4.4.1	Plastic pipes - Multicollar <i>Slim</i> fixed with screws	153
A.4.4.2	Plastic pipes - Multicollar <i>Slim</i> fixed with bolts	154
A.4.4.3	Plastic pipes - double Multicollar <i>Slim</i>	155
A.4.4.4	Plastic pipes - Elastomer LS 400 / CS	156
A.4.4.5	PE Pipe insulated PIR	157
A.4.5	Multimastic FB1 Pattress fixed to wall - 2x50 mm - Multilayer pipe (MLC)	158
A.4.5.1	Multilayer pipe (MLC) - Elastomer LS 400 / CS	158

Annex B.1 - Rigid floors

B.1.1	Directly through floor - Cables, trays and conduits	159
B.1.1.1	Cable bundle	159
B.1.1.2	Multiple PVC conduits	160
B.1.1.3	Multiple flexible conduits with cables	161
B.1.2	Multimastic FB1 - 2x50 mm no cavity - Combustible pipes	162
B.1.2.1	Plastic pipes	162
B.1.2.2	Plastic pipes (Silent)	163
B.1.2.3	PP-R Multilayer pipes	164
B.1.3	Multimastic FB1 - 2x50 mm cavity 50 mm - Combustible pipes	165
B.1.3.1	Plastic pipes	165
B.1.3.2	Plastic pipes (Silent)	166
B.1.3.3	PP-R Multilayer pipes	167
B.1.3.4	Drinks tubing system	168
B.1.4	Multimastic FB1 - 1x60 mm - Combustible pipes	169
B.1.4.1	Plastic pipes	169
B.1.5	SVT Flamro BS60 - 1x60 mm - Combustible pipes	170
B.1.5.1	Plastic pipes	170
B.1.6	Multimortar - ≥ 100 mm - Combustible pipes	171
B.1.6.1	Plastic pipes	171
B.1.6.2	Plastic pipes (Silent)	172
B.1.6.3	PP-R Multilayer pipes	173
B.1.7	Multimortar - ≥ 150 mm - Combustible pipes	174
B.1.7.1	Plastic pipes	174
B.1.7.2	Plastic pipes - double Multicollar <i>Slim</i>	176
B.1.7.3	Plastic pipes perpendicular to 45°	177
B.1.7.4	Plastic pipes perpendicular to 45° - double Multicollar <i>Slim</i>	178
B.1.7.5	Plastic pipes - Elastomer LS-LI 450 / CS-CI	179
B.1.7.6	Plastic pipes - Multicollar <i>Slim</i> recessed into soffit	180
B.1.7.7	Plastic pipes with socket	181
B.1.7.8	Plastic pipes with elbow and U-shape Multicollar <i>Slim</i>	182
B.1.7.9	Plastic pipes in corner	183
B.1.7.10	Plastic pipes (Silent)	184
B.1.7.11	Plastic pipes (Silent) perpendicular to 45° - double Multicollar <i>Slim</i>	185
B.1.7.12	Plastic pipes (Silent) with socket	186
B.1.7.13	Plastic pipes (Silent) with elbow	187
B.1.7.14	Plastic pipes (Silent) with elbow and U-shape Multicollar <i>Slim</i>	188
B.1.7.15	Plastic pipes (Silent) in corner	189
B.1.7.16	PP-R Multilayer pipes	190
B.1.7.17	PP-R Multilayer pipes - Elastomer LS-LI 300 / CS-CI	191
B.1.7.18	PP-R Multilayer pipes in corner	192
B.1.7.19	Drinks tubing system	193
B.1.8	Multimortar + Multimastic FB - ≥ 100 mm - Combustible pipes	194
B.1.8.1	Plastic pipes	194
B.1.8.2	Plastic pipes (Silent)	195
B.1.8.3	PP-R Multilayer pipes	196
B.1.9	Multimortar + Multimastic FB - ≥ 150 mm - Combustible pipes	197
B.1.9.1	Plastic pipes	197
B.1.9.2	Plastic pipes (Silent)	198
B.1.9.3	PP-R Multilayer pipes	199
B.1.9.4	Drinks tubing system	200
B.1.10	Directly through floor - Combustible pipes	201
B.1.10.1	Plastic pipes	201
B.1.10.2	Plastic pipes - double Multicollar <i>Slim</i>	203
B.1.10.3	Plastic pipes perpendicular to 45°	204
B.1.10.4	Plastic pipes perpendicular to 45° - double Multicollar <i>Slim</i>	205
B.1.10.5	Plastic pipes - Elastomer insulation LS-LI 450 / CS-CI	206
B.1.10.6	Plastic pipes - Multicollar <i>Slim</i> recessed into soffit	207
B.1.10.7	Plastic pipes with socket	208
B.1.10.8	Plastic pipes with elbow and U-shape Multicollar <i>Slim</i>	209
B.1.10.9	Plastic pipes in corner	210
B.1.10.10	Plastic pipes (Silent)	211
B.1.10.11	Plastic pipes (Silent) perpendicular to 45° - double Multicollar <i>Slim</i>	212
B.1.10.12	Plastic pipes (Silent) with socket	213
B.1.10.13	Plastic pipes (Silent) with elbow	214
B.1.10.14	Plastic pipes (Silent) with elbow and U-shape Multicollar <i>Slim</i>	215
B.1.10.15	Plastic pipes (Silent) in corner	216
B.1.10.16	PP-R Multilayer pipes	217
B.1.10.17	PP-R Multilayer pipes - Elastomer LS-LI 300 / CS-CI	218
B.1.10.18	PP-R Multilayer pipes in corner	219




B.1.11	Multimortar - ≥ 150 mm - Multilayer pipes (MLC)	220
B.1.11.1	Multilayer pipes (MLC)	220
B.1.11.2	Multilayer pipes (MLC) - double Multicollar <i>Slim</i>	221
B.1.11.3	Multilayer pipes (MLC) - PE foam LS-LI 300 / CS-CI	222
B.1.11.4	Multilayer pipes (MLC) - PE conduit	223
B.1.12	Directly through floor - Multilayer pipes (MLC)	224
B.1.12.1	Multilayer pipes (MLC)	224
B.1.12.2	Multilayer pipes (MLC) - double Multicollar <i>Slim</i>	225
B.1.12.3	Multilayer pipes (MLC) - PE foam LS-LI 300 / CS-CI	226
B.1.12.4	Multilayer pipes (MLC) - Elastomer LS-LI 500 / CS-CI	227
B.1.12.5	Multiple Multilayer pipes (MLC) - PE foam LS-LI 300 / CS-CI	228
B.1.13	Multimastic FB1 - 2x50 mm - Metal pipes	229
B.1.13.1	Steel pipes - Elastomer LI 300 / CI	229
B.1.14	Multimastic FB1 - 2x50 mm cavity 50 mm - Metal pipes	230
B.1.14.1	Steel pipes - Elastomer LI 300 / CI	230
B.1.15	Multimortar - ≥ 100 mm - Metal pipes	231
B.1.15.1	Steel pipes - Elastomer LI 300 / CI	231
B.1.16	Multimortar - ≥ 150 mm - Metal pipes	232
B.1.16.1	Steel pipes - Elastomer LI 300 / CI	232
B.1.17	Multimortar + Multimastic FB - ≥ 100 mm - Metal pipes	233
B.1.17.1	Steel pipes - Elastomer LI 300 / CI	233
B.1.18	Multimortar + Multimastic FB - ≥ 150 mm - Metal pipes	234
B.1.18.1	Steel pipes - Elastomer LI 300 / CI	234
B.1.19	Directly through floor - Metal pipes	235
B.1.19.1	Copper and steel pipes	235
B.1.19.2	Copper and steel pipes - Elastomer LI 500 / CI	236
B.1.19.3	Copper and steel pipes - Elastomer LS 450 / CS	237
B.1.20	Multimortar - ≥ 150 mm - Gas pipes	238
B.1.20.1	Corrugated stainless steel tube gas (CSST) pipes - Multitherm Bandage	238
B.1.20.2	Corrugated stainless steel tube gas (CSST) pipes - Multitherm Bandage	239
B.1.21	Multimortar + Multimastic FB - 150 mm - Gas pipes	240
B.1.21.1	Corrugated stainless steel tube gas (CSST) pipes - Multitherm Bandage	240
B.1.21.2	Corrugated stainless steel tube gas (CSST) pipes - Multitherm Bandage	241
B.1.22	Directly through floor - Multiple services	242
B.1.22.1	Multiple pipes and cables	242
B.1.22.2	Airconditioning set	243
B.1.23	Directly through floor - Flue gas pipes	244
B.1.23.1	Aluminium flue gas pipes	244
B.1.23.2	Concentric steel/PP flue gas pipes	245
B.1.23.3	Plastic flue gas pipes	246
B.1.23.4	Concentric plastic flue gas pipes	247
 Annex B.2 - CLT floors		
B.2.1	Directly through floor - Cables, trays and conduits	248
B.2.1.1	Multiple plastic conduits	248
B.2.1.2	Flexible conduits with cables	249
B.2.2	Multimastic FB1 - 2x50 mm - Combustible pipes	250
B.2.2.1	Plastic pipes	250
B.2.2.2	Plastic pipes (Silent)	251
B.2.2.3	PP-R Multilayer pipes	252
B.2.3	Directly through the floor - Combustible pipes	253
B.2.3.1	Plastic pipes	253
B.2.3.2	Plastic pipes (Silent)	254
B.2.4	Directly through the floor - Cast-in sleeve	255
B.2.4.1	Multilayer pipes (MLC) - Elastomer CS	255
B.2.4.2	Copper and steel pipes - Elastomer CS	256
B.2.4.3	Steel pipes - PUR-PE CS	257

Annex C - General

C.1	Wall constructions - General	258
C.1.1	Mutual distances & distance to first support	258
C.1.2	Wall constructions - Maximum seal dimensions flexible or rigid wall	259
C.1.2.1	Multimastic FB1 - 2x 50 mm no aperture framing	259
C.1.2.2	Multimastic FB1 - 2x 50 mm with aperture framing	260
C.1.2.3	Multimastic FB1 - 2x 50 mm - Pattress	261
C.1.2.4	Multimastic FB2 - 1x 60 mm with aperture framing	262
C.1.2.5	Multimastic FB2 - 1x 60 mm with aperture framing	281
C.1.3	Wall constructions - Maximum seal dimensions rigid wall	264
C.1.3.1	Multimastic FB2 - 2x 60 mm with cavity ≤ 30 mm	264
C.1.3.2	Multimastic FB2 - 2x 60 mm - Pattress fixed to wall	265
C.1.4	Wall constructions - Maximum seal dimensions flexible or rigid wall	266
C.1.4.1	Multimortar - ≥ 100 mm	266
C.1.4.2	Multimortar + Mulcol Multimastic FB system - ≥ 100 mm	267
C.1.4.3	Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm	268
C.1.5	Wall constructions - Maximum seal dimensions CLT wall	269
C.1.5.1	Multimastic FB1 - 2x 50 mm no aperture framing	269
C.1.6	Wall constructions - Maximum seal dimensions Sandwich panel	270
C.1.6.1	Multimastic FB1 - 2x 50 mm no aperture framing	270
C.1.6.2	Multimastic FB1 - 2x 50 mm with aperture framing	271
C.2	Rigid floor - General	272
C.2.1	Mutual distances & distance to first support	272
C.2.2	Rigid floor - Multimastic C - Maximum seal dimensions	273
C.2.2.1	Multimastic FB1 - 2x 50 mm no cavity	273
C.2.2.2	Multimastic FB1 - 2x 50 mm cavity ≤ 50 mm	274
C.2.2.3	Multimastic FB2 - 1x 60 mm	275
C.2.3	Rigid floor - Multimortar - Maximum seal dimensions	276
C.2.3.1	Multimortar - ≥ 100 mm	276
C.2.3.2	Multimortar + Mulcol Multimastic FB system - ≥ 100 mm	277
C.2.3.3	Multimortar + Mulcol Multimastic FB system - ≥ 150 mm	278
C.2.4	CLT floor - Multimastic C - Maximum seal dimensions	279
C.2.4.1	Multimastic FB1 - 2x 50 mm no cavity	279
C.3	Wall configurations	280
C.3.1	Allowed wall configurations	280

A.1.1 Multimastic FB2 - 1x60 mm - Cables, trays and conduits

A.1.1.1 Multiple flexible conduits with cables

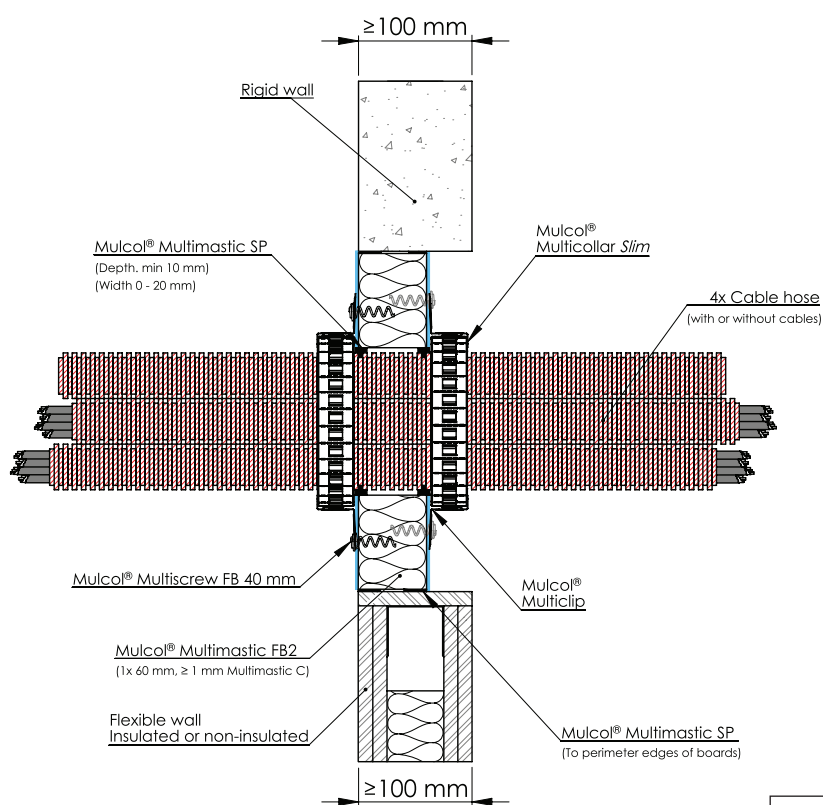
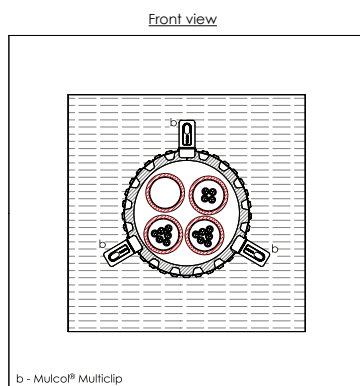


Drawing: PBfw.E-ECH4-MC30-MFB2.1.30

Services	Number of sleeves	Product	Sealing (mm)	Classification
Ribbed PE-sleeve conduit ≤ Ø 63 mm, with or without cables	≤ 4	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxh)	EI 90 U/C, E 120 U/C

A.1.3 Multimortar + Multimastic FB - ≥ 100 mm - Cables, trays and conduits

A.1.3.1 Multiple flexible conduits with cables

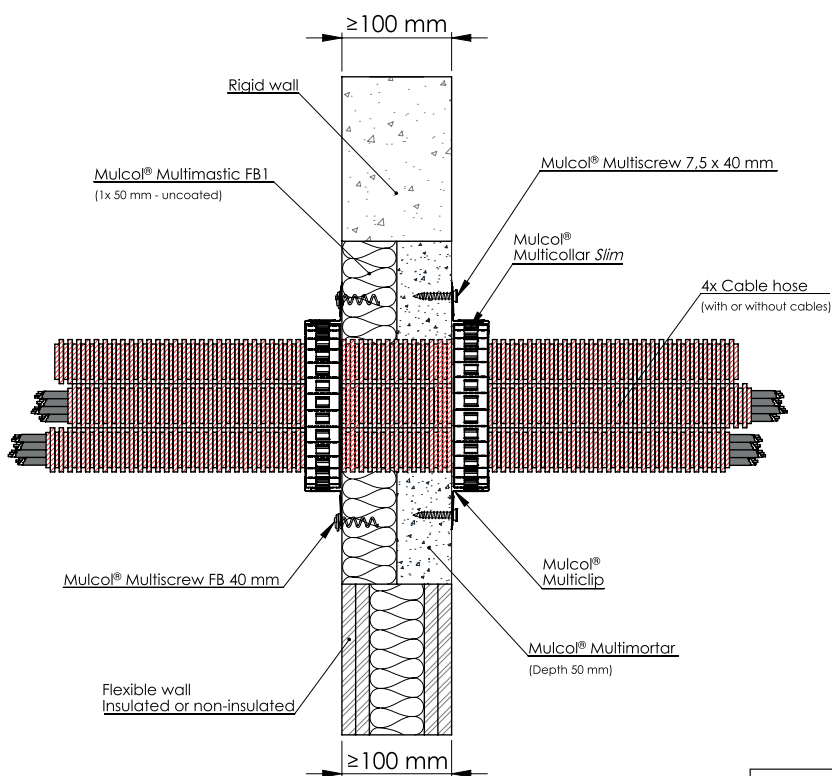
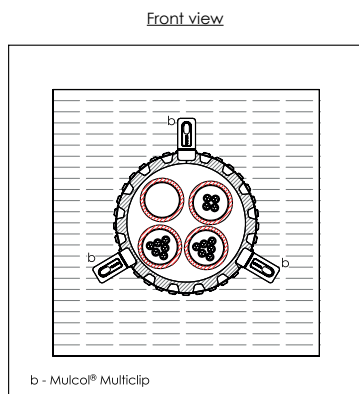


Drawing: FW.E-MC30-ECH4-MM2.5.30

Services	Number of sleeves	Product	Allowed cables	Classification
Ribbed PE-sleeve conduit $\leq \varnothing 63$ mm, with or without cables	≤ 4	Multicollar <i>Slim</i>	Sheathed cables $\leq \varnothing 21$ mm (single or bundled) Cables $\leq \varnothing 21$ mm in a tied bundle $\leq \varnothing 100$ mm	EI 90 U/C, E 120 U/C

A.1.4 Multimortar - ≥ 100 mm - Cables, trays and conduit

A.1.4.1 Multiple flexible conduits with cables

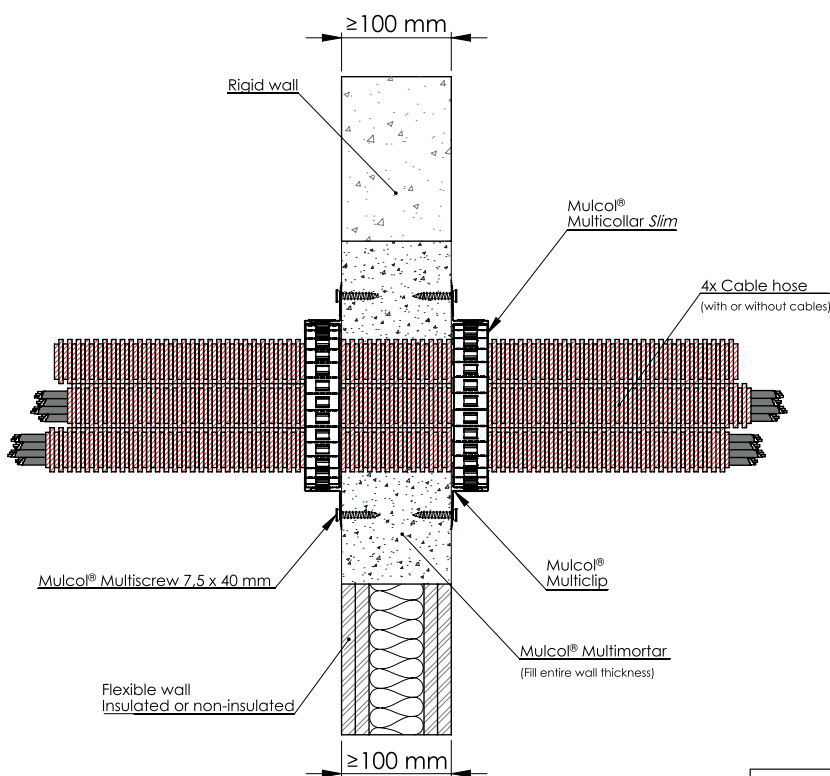
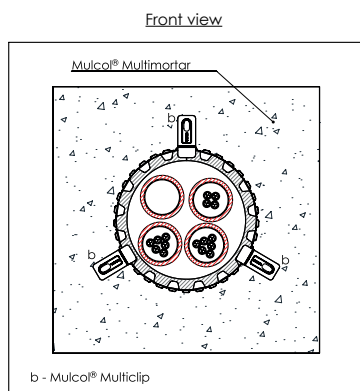


Drawing: FW.E-MC30-ECH4-MM1.2.30

Services	Number of sleeves	Product	Allowed cables	Classification
Ribbed PE-sleeve conduit $\leq \varnothing 63$ mm with or without cables	≤ 4	Multicollar Slim	Sheathed cables $\leq \varnothing 21$ mm (single or bundled) Cables $\leq \varnothing 21$ mm in a tied bundle	EI 90 U/C, E 120 U/C
Ribbed PE-sleeve conduit $\leq \varnothing 50$ mm with or without cables	≤ 5	Multicollar Slim	Sheathed cables $\leq \varnothing 21$ mm (single or bundled) Cables $\leq \varnothing 21$ mm in a tied bundle	EI 120 U/U

A.1.5 Directly through wall - ≥ 100 mm - Cables, trays and conduits

A.1.5.1 Electrical cables

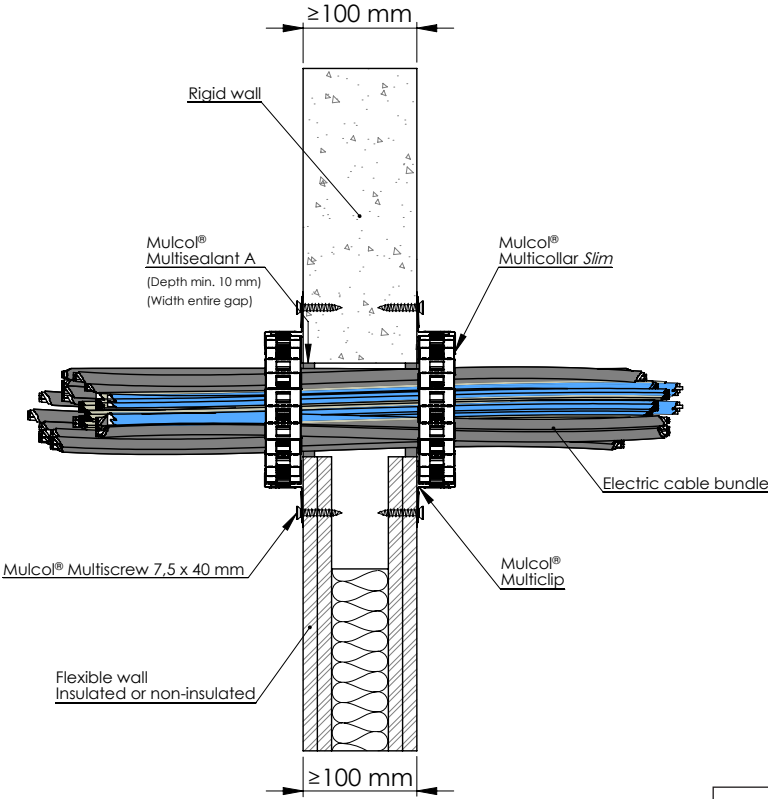
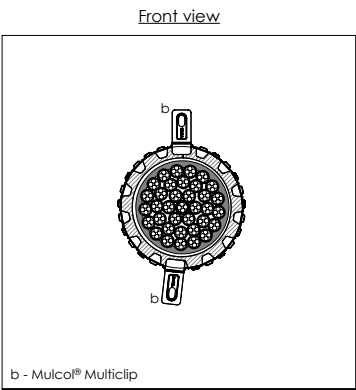


Drawing: FW.E-MC30-ECB-10.0.10

Services	Product	Aperture (mm)	Sealing (mm)	Classification
Multiple electrical / telecommunication cables max. 63 pcs.	Multicollar <i>Slim</i>	$\leq \varnothing 100$	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120

A.1.5 Directly through wall - ≥ 100 mm - Cables, trays and conduits

A.1.5.2 Multiple PVC conduits

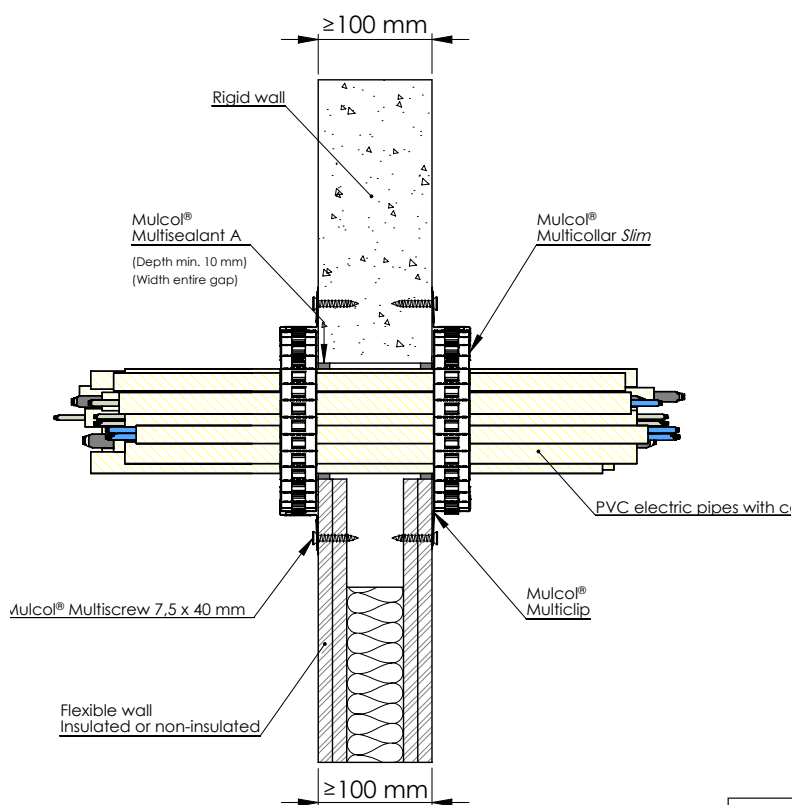
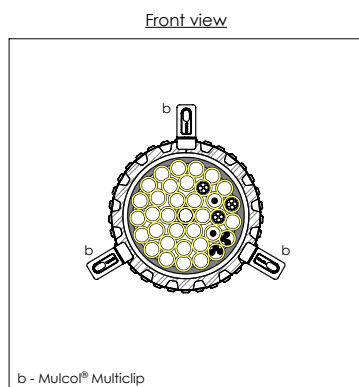


Drawing: FW.E-MC30-EPB-10.0.40

Services	Product	Aperture (mm)	Sealing (mm)	Classification
Multiple PVC conduits max. 18 pcs., max. $\leq \varnothing 25$ mm with or without cables	Multicollar Slim	$\leq \varnothing 100$	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/U

A.1.5 Directly through wall - ≥ 100 mm - Cables, trays and conduits

A.1.5.3 Multiple flexibles conduits with cables


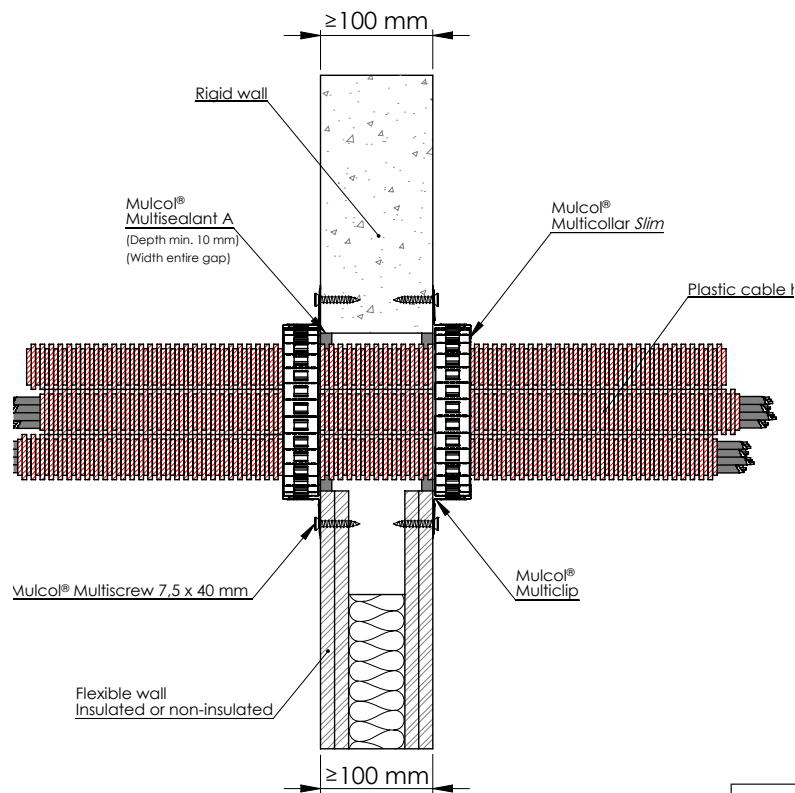
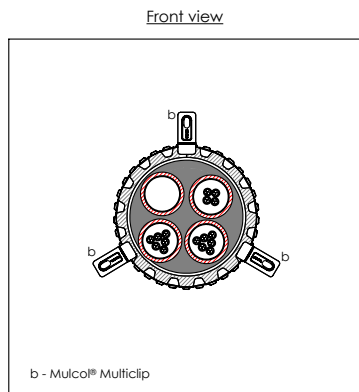


Drawing: FW.E-MC30-ECH-10.0.30

Services	Number of sleeves	Product	Allowed cables	Classification
Ribbed PE-sleeve conduit $\leq \varnothing 50$ mm with or without cables	≤ 5	Multicollars Slim	Sheathed cables $\leq \varnothing 21$ mm (single or bundled) Cables $\leq \varnothing 21$ mm in a tied bundle	EI 120 U/U

A.1.6 Multimastic FB1 - 2x50 mm - Combustible pipes

A.1.6.1 Plastic pipes

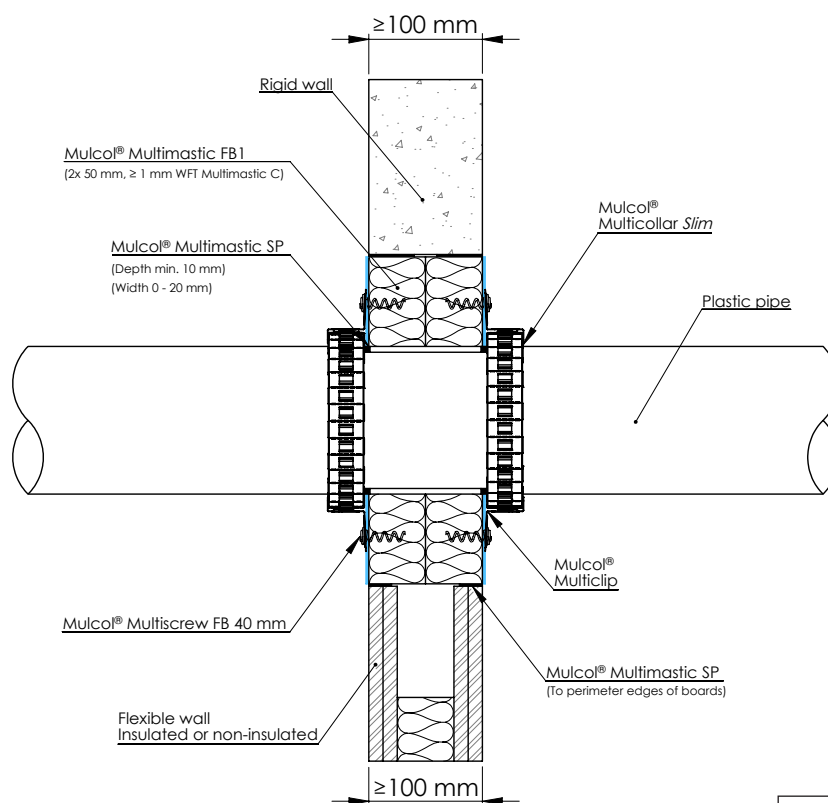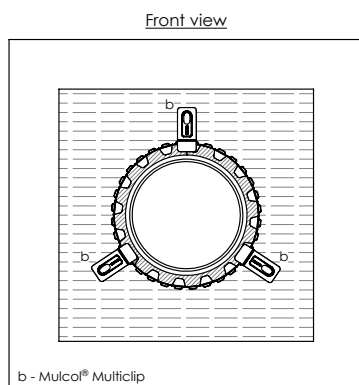

Drawing: PBfw.E-MC30-PP-MFB1.2.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 40	2.3 - 9.3	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 60 U/U
PP					
PVC(-U/-C)					
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7 - 6.6			EI 120 U/U
		6.6 - 9.3			EI 60 U/U
2.7		EI 120 U/U			
PP		2.7 - 9.3			EI 60 U/U
		2.7			EI 120 U/U
PVC(-U/-C)		2.7 - 9.3			EI 60 U/U




A.1.6 Multimastic FB1 - 2x50 mm - Combustible pipes

A.1.6.1 Plastic pipes

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 125	3.1 - 9.3	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 60 U/U
PP					
PVC(-U/-C)					
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 160	4.0 - 9.5			EI 60 U/C
PP		4.0 - 9.1			
PVC(-U/-C)					

A.1.6 Multimastic FB1 - 2x50 mm - Combustible pipes

A.1.6.2 Multiple plastic pipes

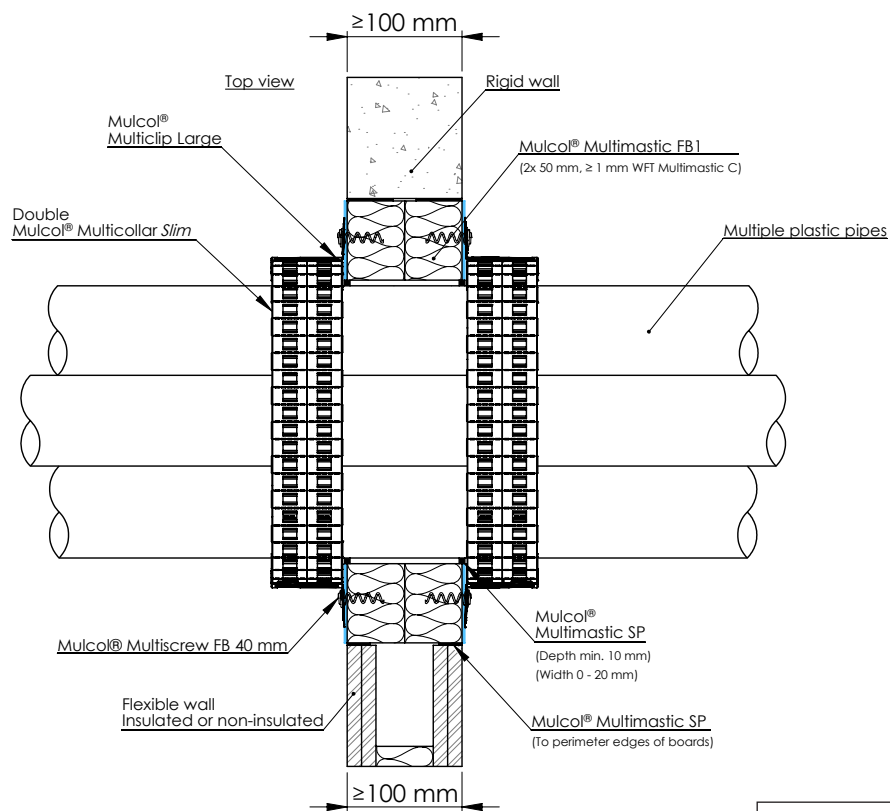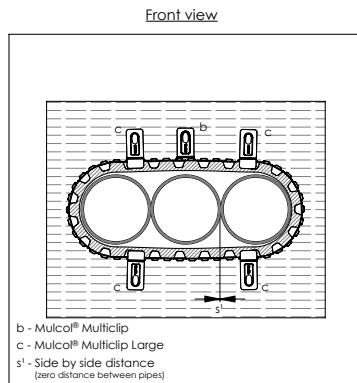

Drawing: PBfw.E-MLP3-20.0.10



Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	$3x \leq \varnothing 110$	2.7	Multicollar Slim Double	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/C, E 120 U/C

A.1.6 Multimastic FB1 - 2x50 mm - Combustible pipes


A.1.6.3 Plastic pipes perpendicular to 45°

Front view

- a - Annular space
(Maximum 15 mm between pipe and Mulcol® Multicollar Slim)
b - Mulcol® Multiclip



Position seal:
right, left or anywhere
in between



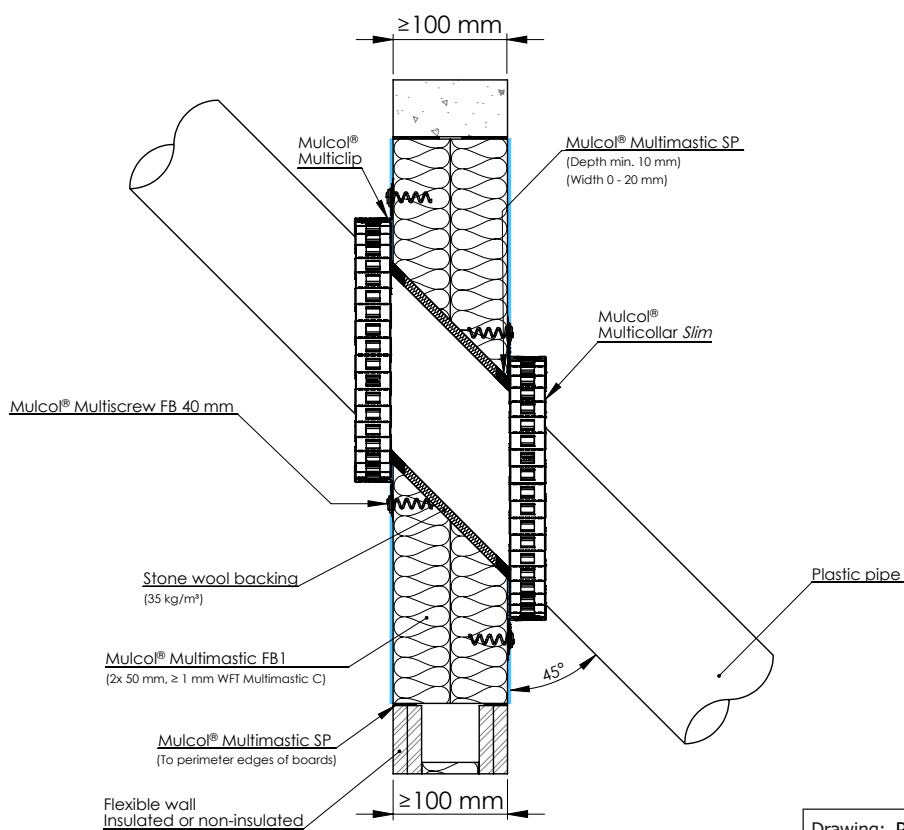


Drawing: PBfw.E-PP-MFB1-10.1.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 60 U/U, E 90 U/U
PP					
PVC(-U/-C)					

A.1.6 Multimastic FB1 - 2x50 mm - Combustible pipes

A.1.6.4 Plastic pipes (Silent)

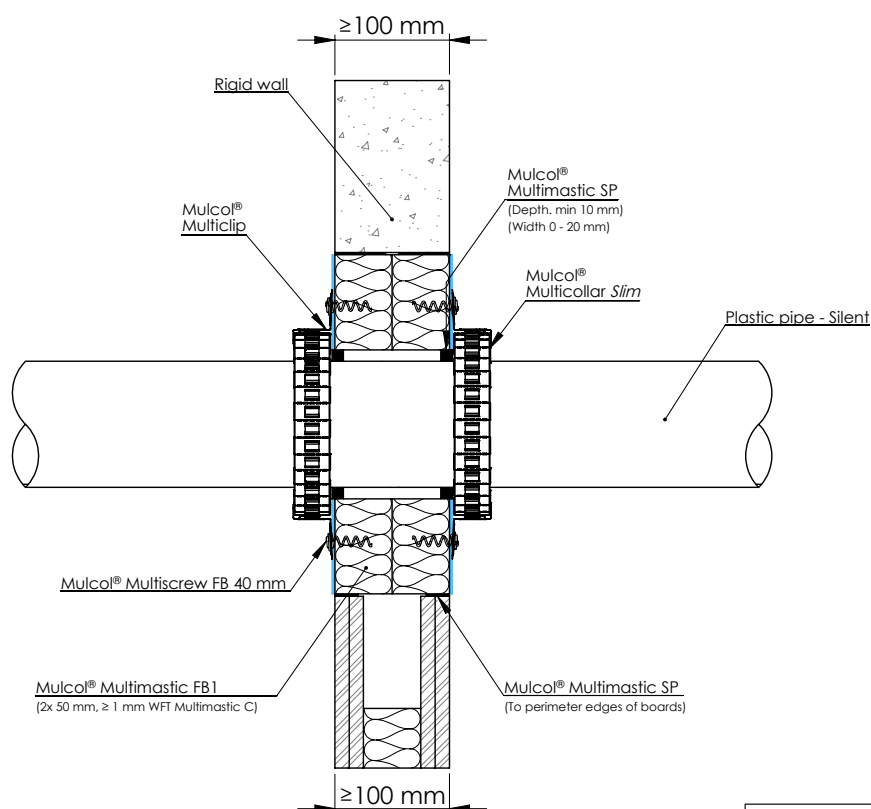

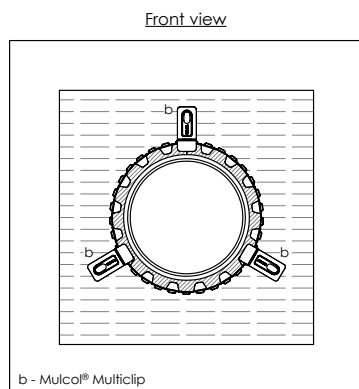


Drawing: PBfw.E-MC30-PPS-MFB1.2.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB20	≤ Ø 110	6.0	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 60 U/U

A.1.6 Multimastic FB1 - 2x50 mm - Combustible pipes

A.1.6.5 PP-R Multilayer pipes

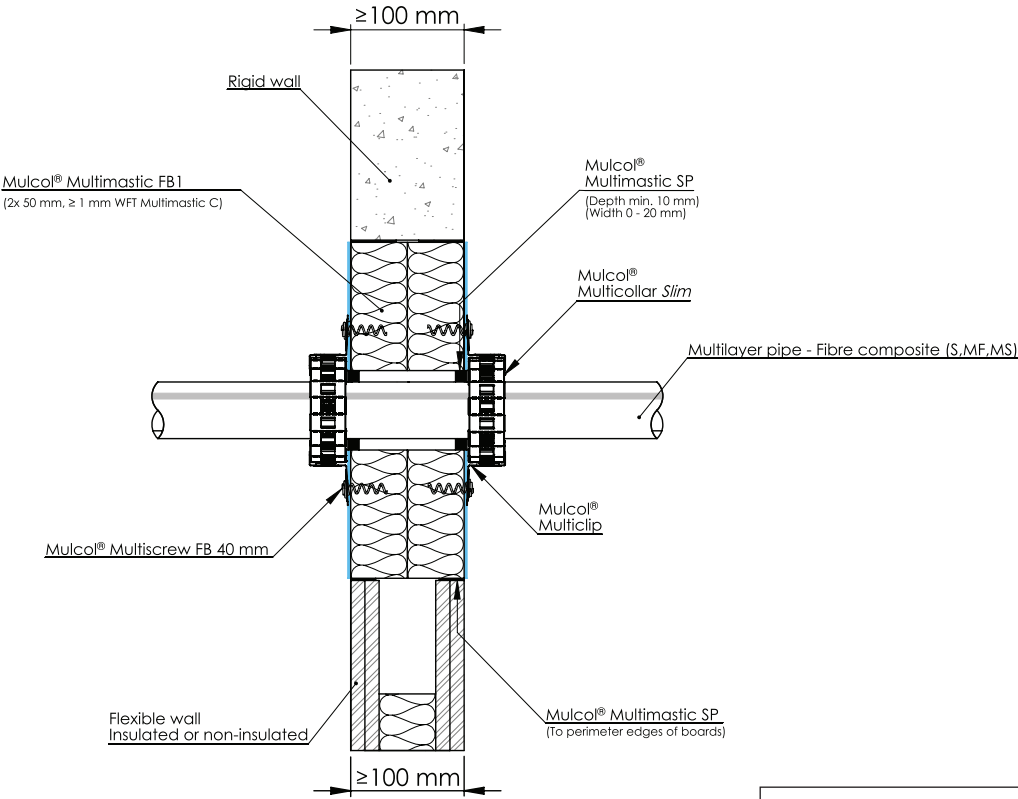

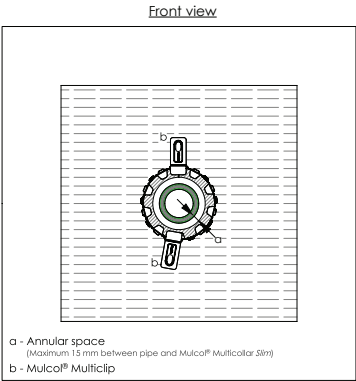


Drawing: PBfw.E-MLF-MC30-10.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Aquatherm Green	≤ Ø 50	6.9	Multicollar Slim	Multimastic SP ≥ 0-20 x 10 (wxh)	EI 120 U/C

A.1.6 Multimastic FB1 - 2x50 mm - Combustible pipes

A.1.6.6 PP-R Multilayer pipes - Elastomer LI 300 / CI

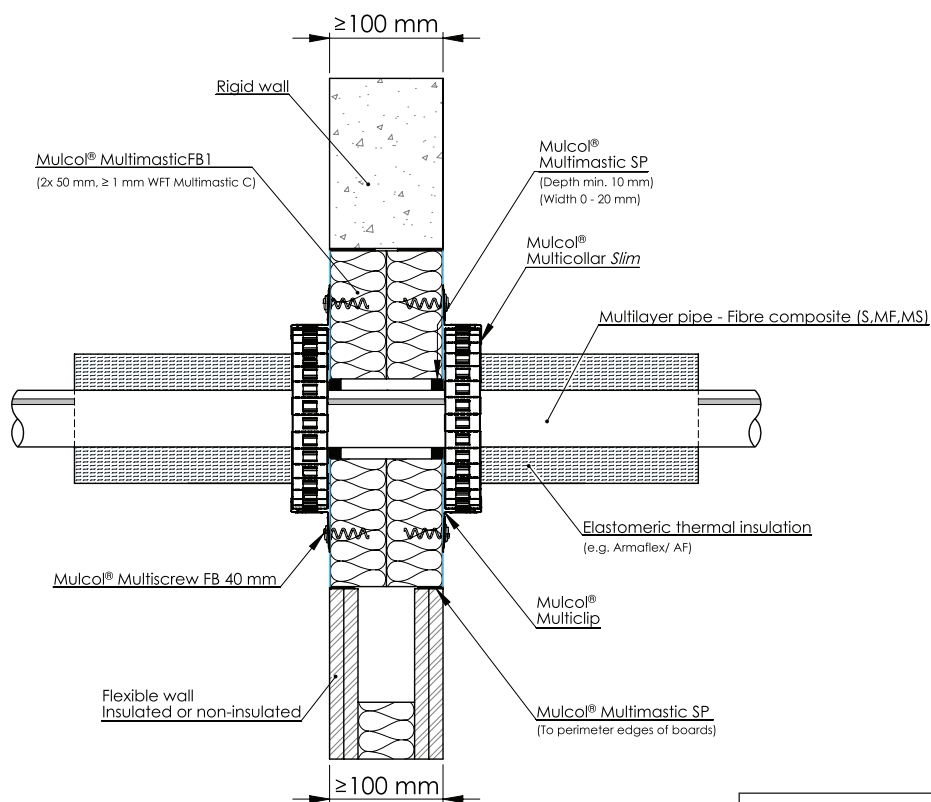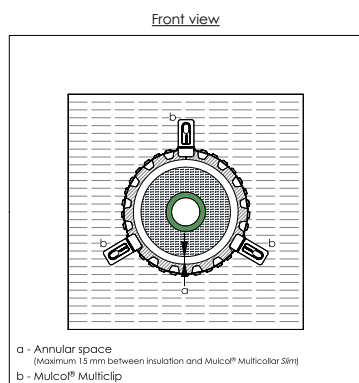


Drawing: PBfw.E-MLF-MC30-10.0.22

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
Aquatherm Green	≤ Ø 50	6.9	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	9 - 32	LI 300 / CI	Multicollar <i>Slim</i>	EI 120 U/C

A.1.6 Multimastic FB1 - 2x50 mm - Combustible pipes




A.1.6.7 Drinks tubing system

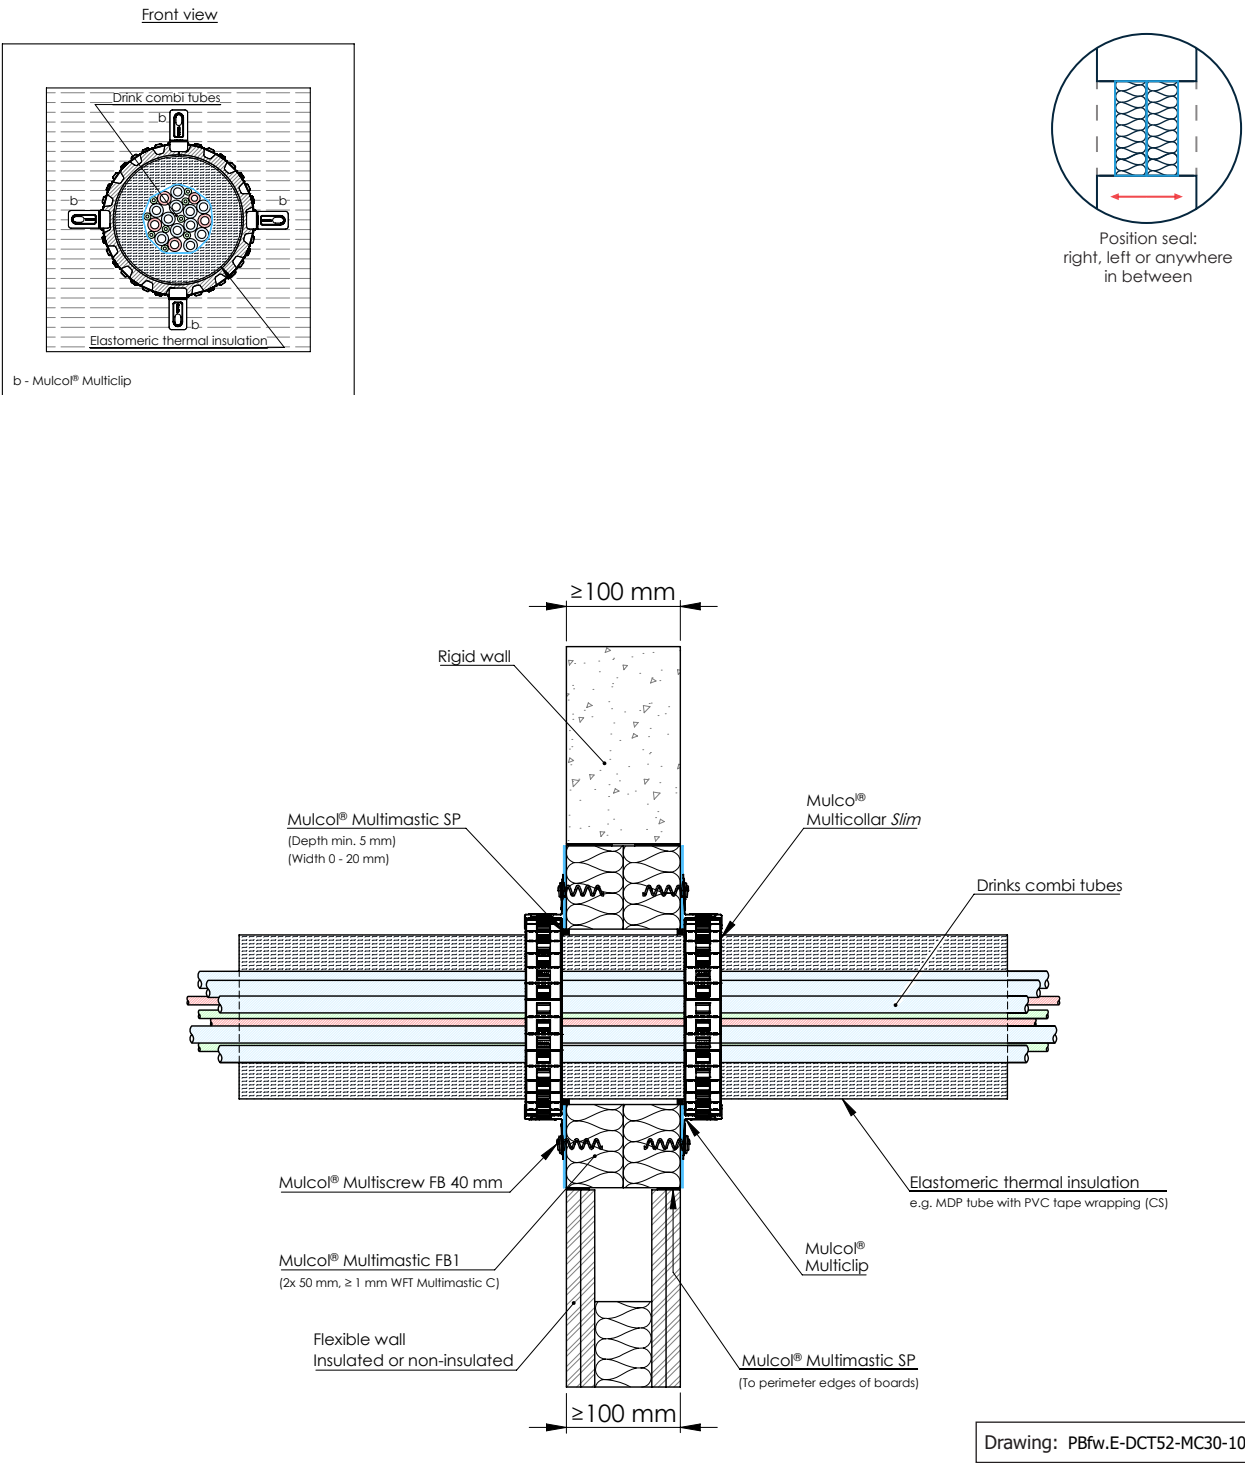

Services	Dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimension	Hoses no.	Type	Thickness (mm)	Configuration			
Drinks tubing system	$\leq \varnothing 47$	≤ 3	Elastomeric foam	8 - 35	CS	Multicollar Slim	Multimastic SP $\geq 0-20 \times 5$ (wx d)	EI 60 U/C
	$\leq \varnothing 145$	≤ 52						

A.1.6 Multimastic FB1 - 2x50 mm - Combustible pipes

A.1.6.8 Rectangular plastic duct

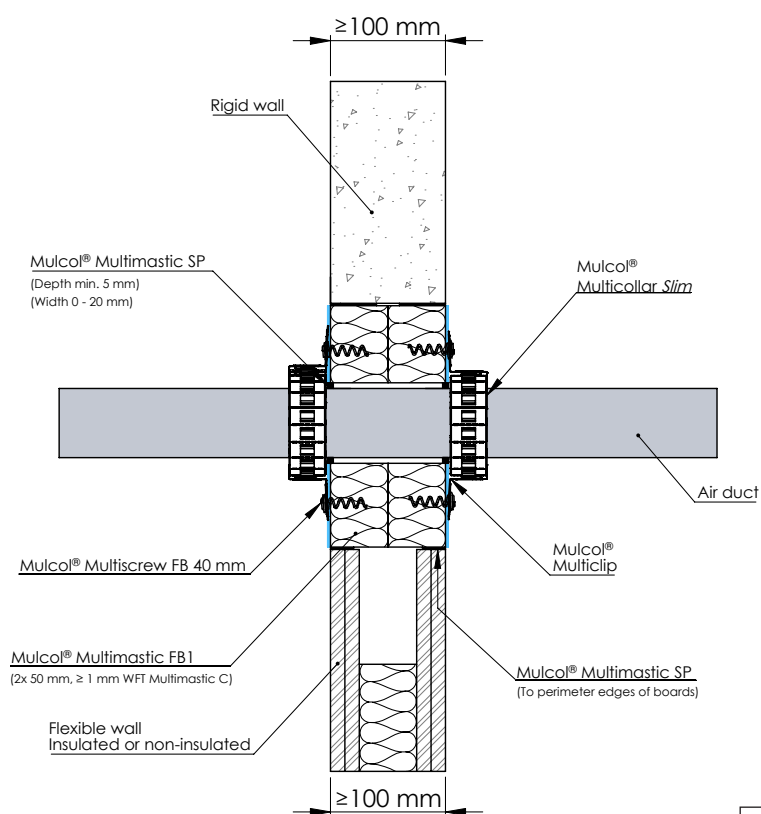

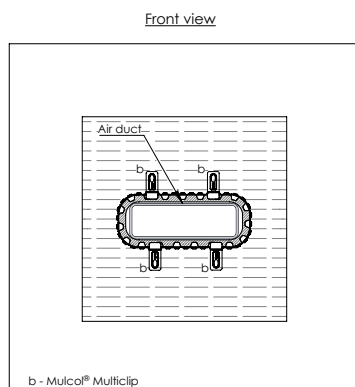


Drawing: PBfw.E-AD-MFB1.2.10

Services	Duct dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Rectangular plastic duct	≤ 220 x 90	1.0	Multicollar <i>Slim</i>	Multimastic SP ≥ 0-20 x 5 (wxd)	EI 45 U/C
		2.0			EI 120 U/C

A.1.7 Multimastic FB2 - 1x60 mm - Combustible pipes

A.1.7.1 Plastic pipes

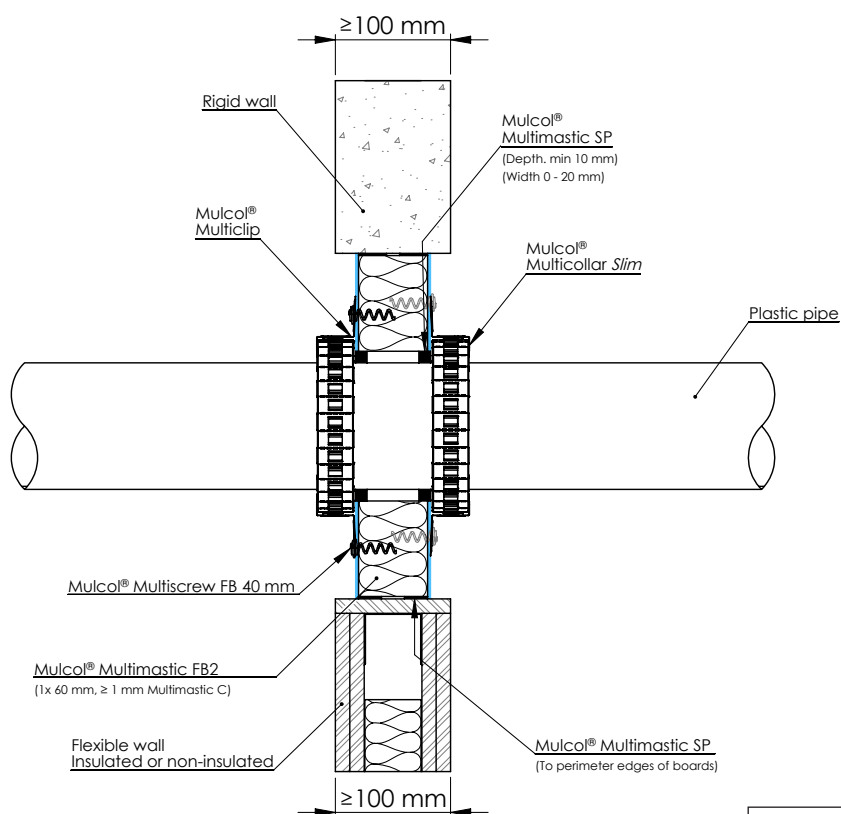

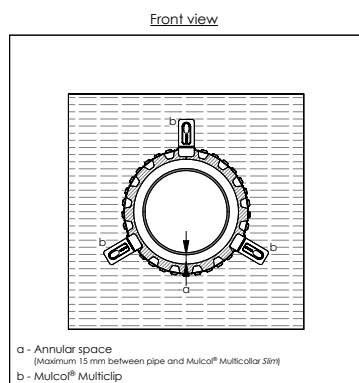


Drawing: PBfw.E-PP-MFB2.1.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC PVC(-U/-C)	≤ Ø 110	2.7	Multicollar <i>Slim</i>	Multimastic SP ≥ 0-20 x 10 (wxd)	EI 120 U/U
PE(-HD) / PE-X / ABS / SAN+PVC PP	≤ Ø 125	3.9			EI 45 U/U E 60 U/U
PVC(-U/-C)					EI 60 U/U

A.1.7 Multimastic FB2 - 1x60 mm - Combustible pipes

A.1.7.2 Plastic pipes (Silent)

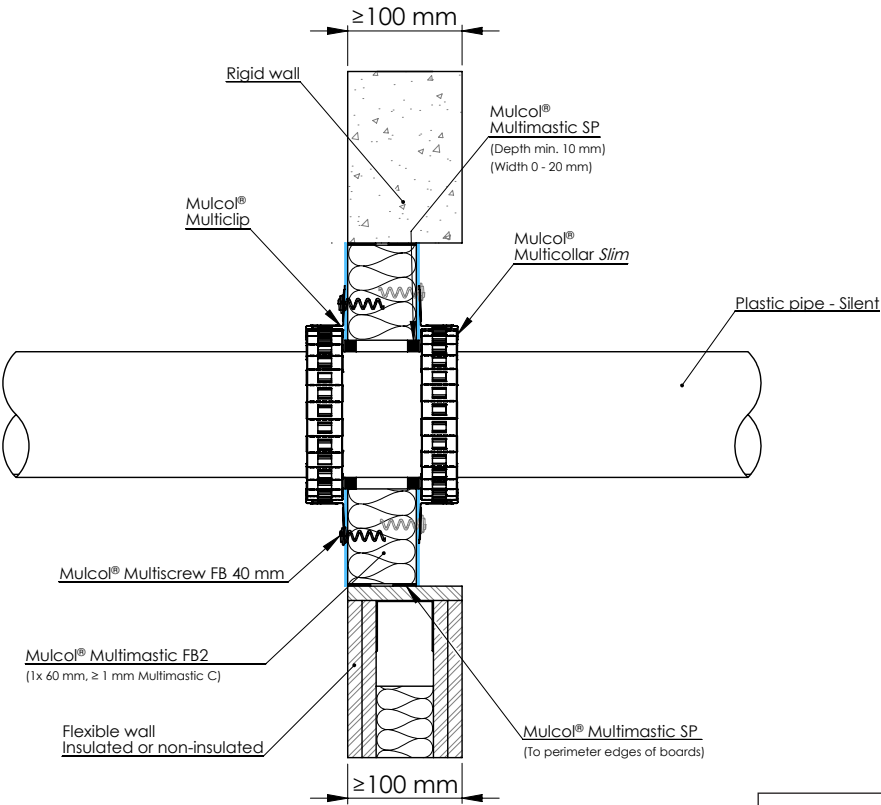
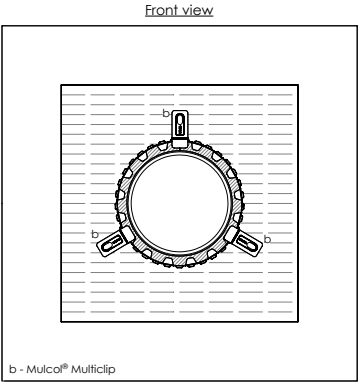


Drawing: PBfw.E-MC30-PPS-MFB2.1.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB20	≤ Ø 110	6.0	Multicollar Slim	Multimastic SP ≥ 0-20 x 10 (wxd)	EI 60 U/U

A.1.8 Multimortar + Multimastic FB - ≥ 100 mm - Combustible pipes

A.1.8.1 Plastic pipes

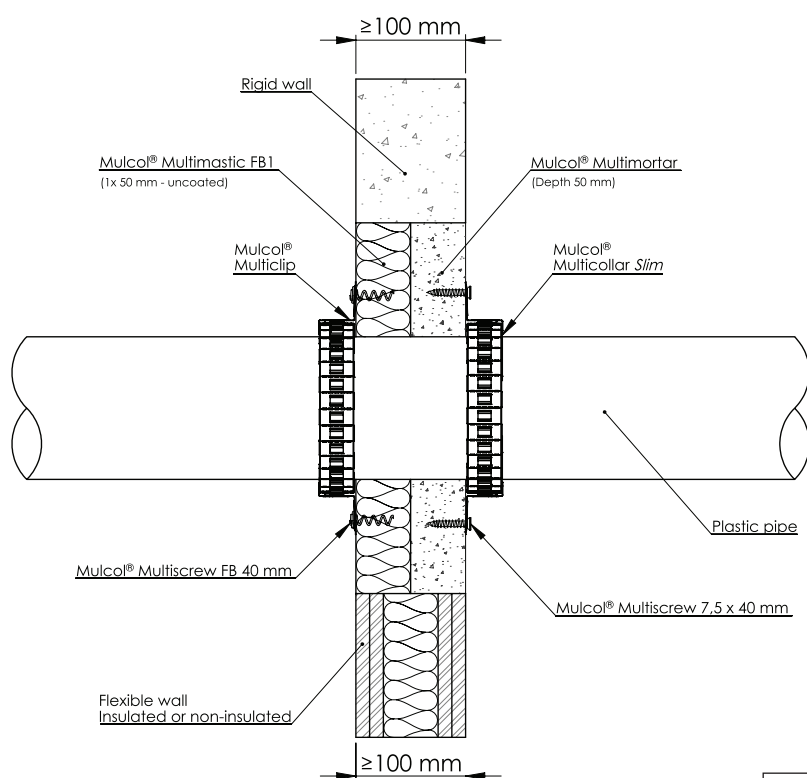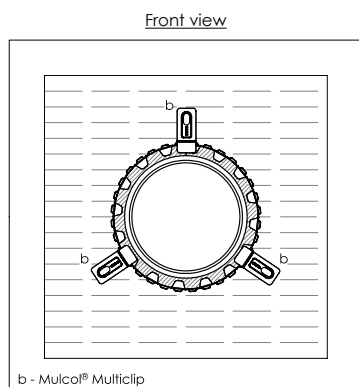

Drawing: FW.E-MC30-PP-MM2.5.10



Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7 - 6.6	Multicollar <i>Slim</i>	EI 120 U/U
PP		2.7		
PVC(-U/-C)				

A.1.8 Multimortar + Multimastic FB - ≥ 100 mm - Combustible pipes

A.1.8.2 Plastic pipes perpendicular to 45°

Front view

- a - Annular space
(Maximum 15 mm between pipe and Mulcol® Multicollar Slim)
b - Mulcol® Multiclip

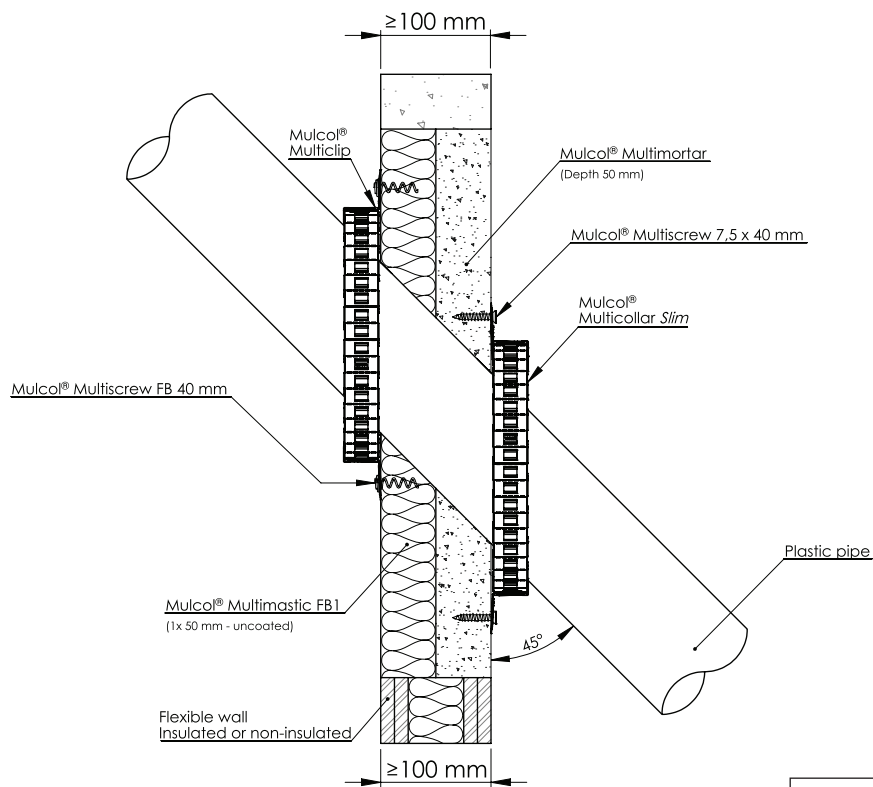



Drawing: FW.E-MC30o-PP-MM2.5.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE(-HD) / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	2.7	Multicollar Slim	EI 60 U/U, E 90 U/U
PP				
PVC(-U/-C)				

A.1.8 Multimortar + Multimastic FB - ≥ 100 mm - Combustible pipes

A.1.8.3 PP-R Multilayer pipes

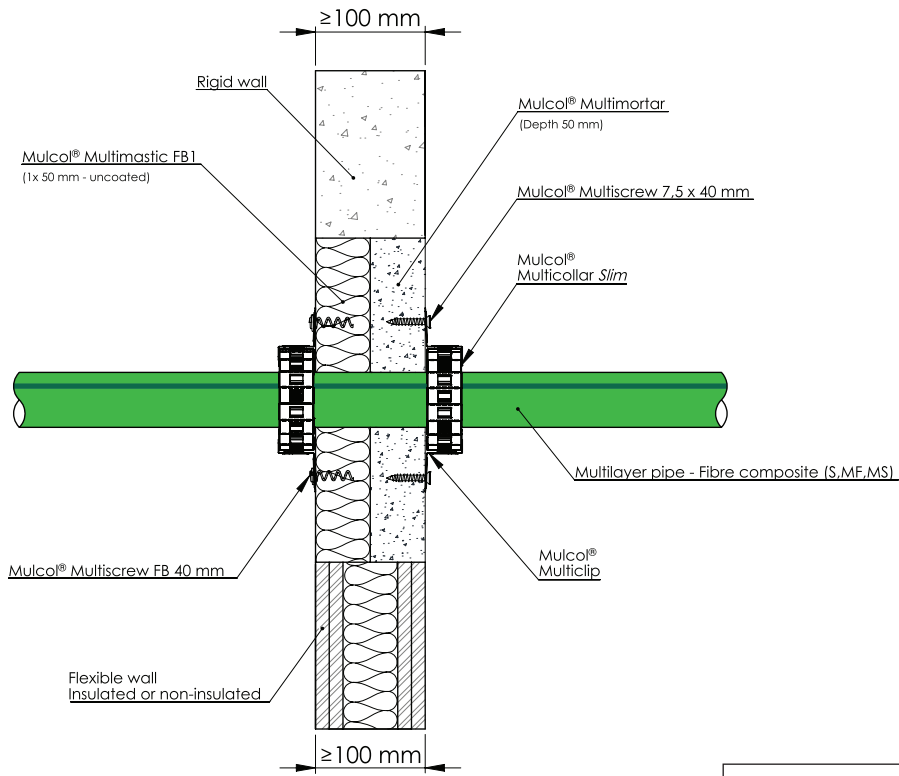
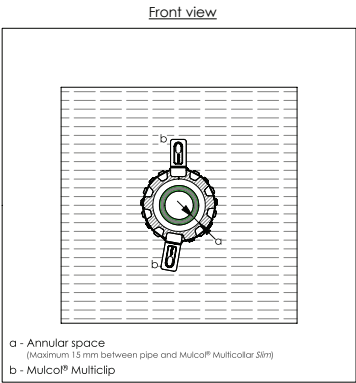


Drawing: FW.E-MC30-MLF-MM2.5.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Green	≤ Ø 50	6.9	Multicollar <i>Slim</i>	EI 120 U/C

A.1.8 Multimortar + Multimastic FB - ≥ 100 mm - Combustible pipes

A.1.8.4 Drinks tubing system

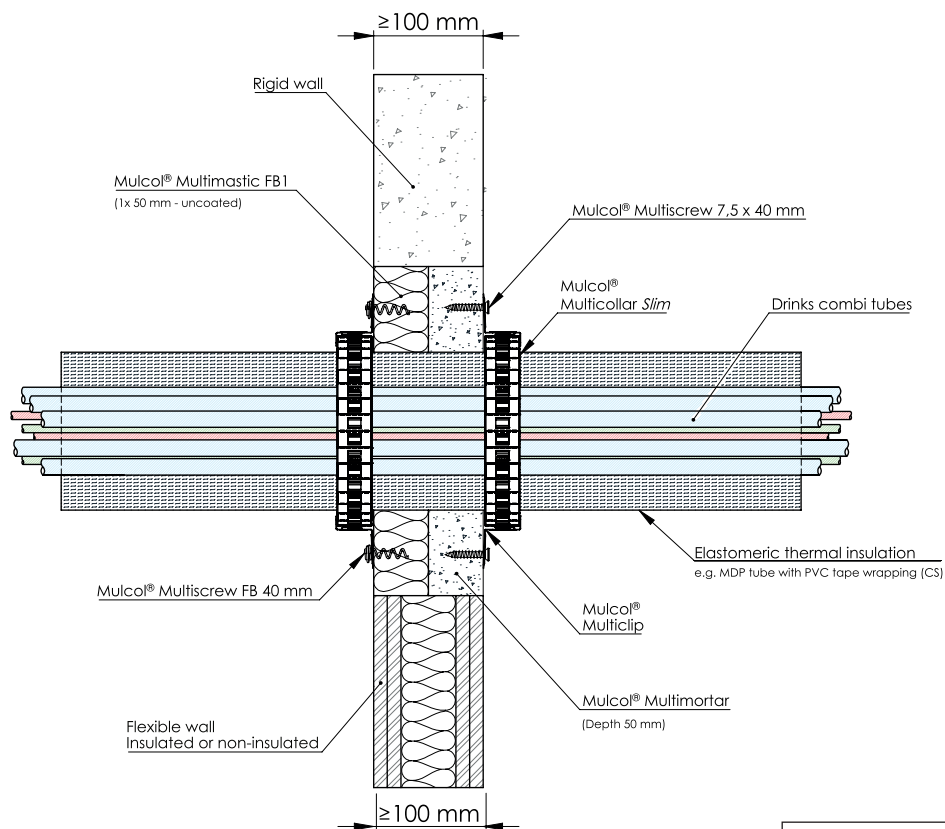
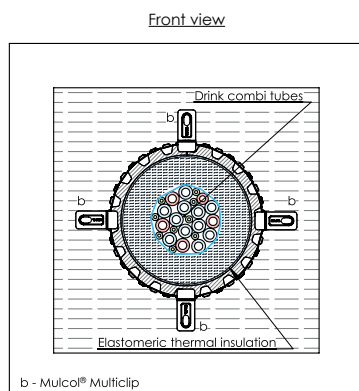


Drawing: FW.E-MC30-DCT52-MM2.5.10

Services	Dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Hoses no.	Type	Thickness (mm)	Configuration		
Drinks tubing system	$\leq \varnothing 145$	≤ 52	Elastomeric foam	8 - 35	CS	Multicollar <i>Slim</i>	EI 60 U/C

A.1.8 Multimortar + Multimastic FB - ≥ 100 mm - Combustible pipes

A.1.8.5 Rectangular plastic duct

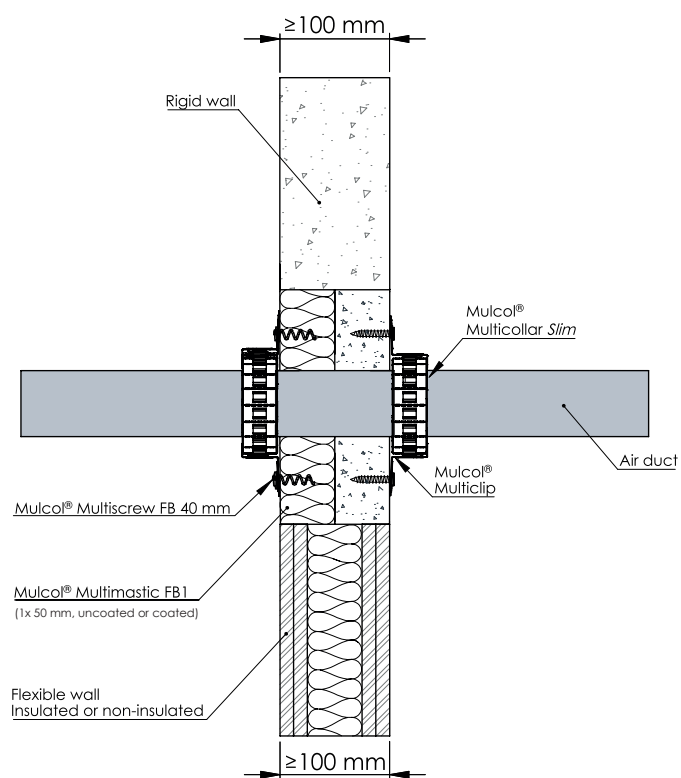
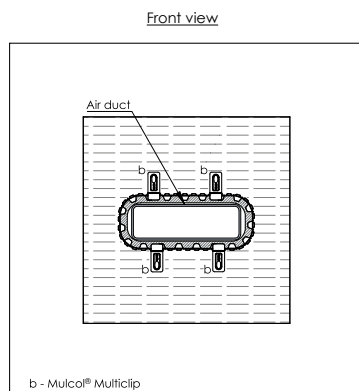


Drawing: FW.E-MC30-AD-MM2.5.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Rectangular plastic duct	$\leq 220 \times 90$	1.0	Multicollar Slim	EI 45 U/C
		2.0		EI 120 U/C

A.1.9 Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm - Combustible pipes

A.1.9.1 Plastic pipes

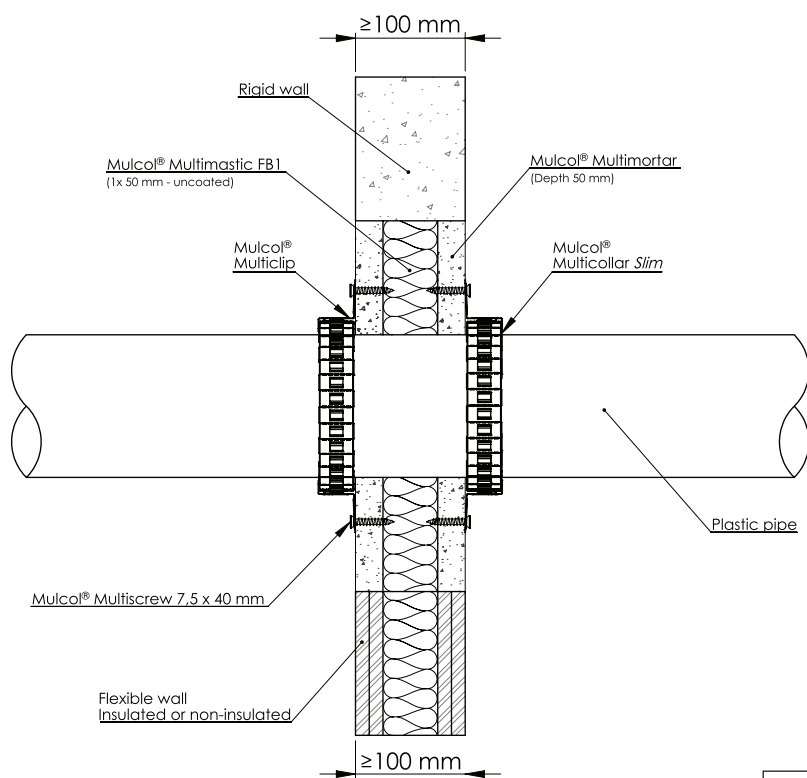
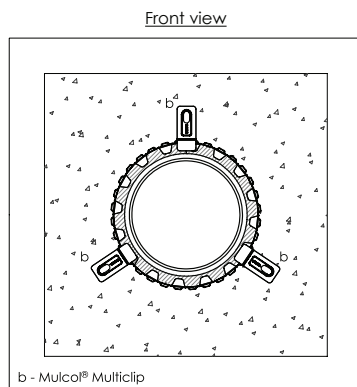


Drawing: FW.E-MC30-PP-MM3.4.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7 - 6.6	Multicollar <i>Slim</i>	EI 120 U/U
PP		2.7		
PVC(-U/-C)				

A.1.9 Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm - Combustible pipes

A.1.9.2 Plastic pipes perpendicular to 45°

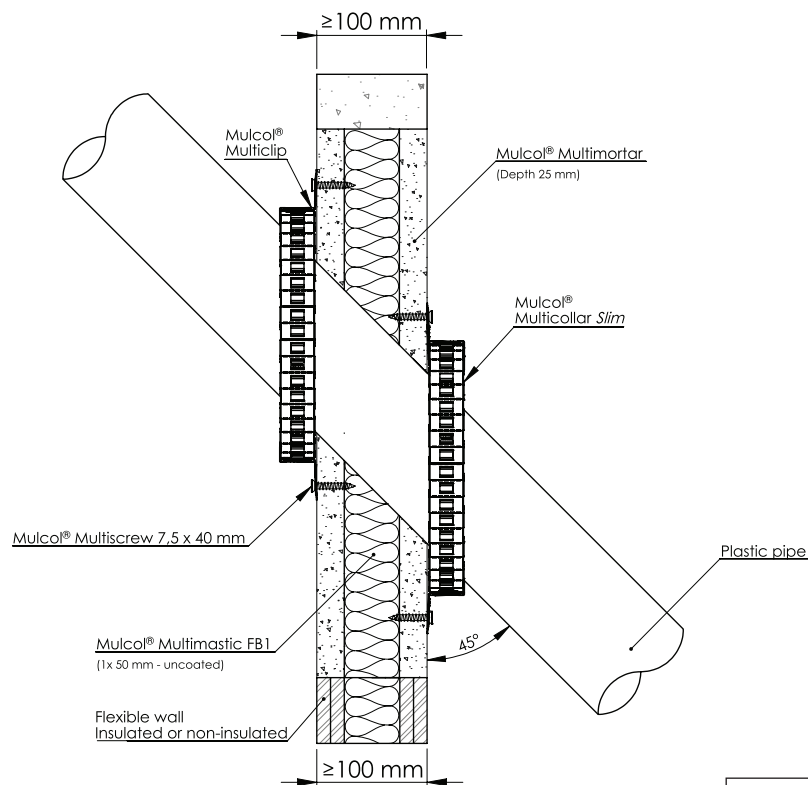
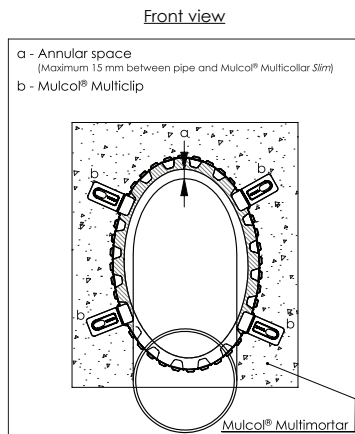


Drawing: FW.E-PP-MM3.4.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE(-HD) / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	2.7	Multicollar Slim	EI 60 U/U, E 90 U/U
PP				
PVC(-U/-C)				

A.1.9
A.1.9.3

Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm -
Combustible pipes
PP-R Multilayer pipes

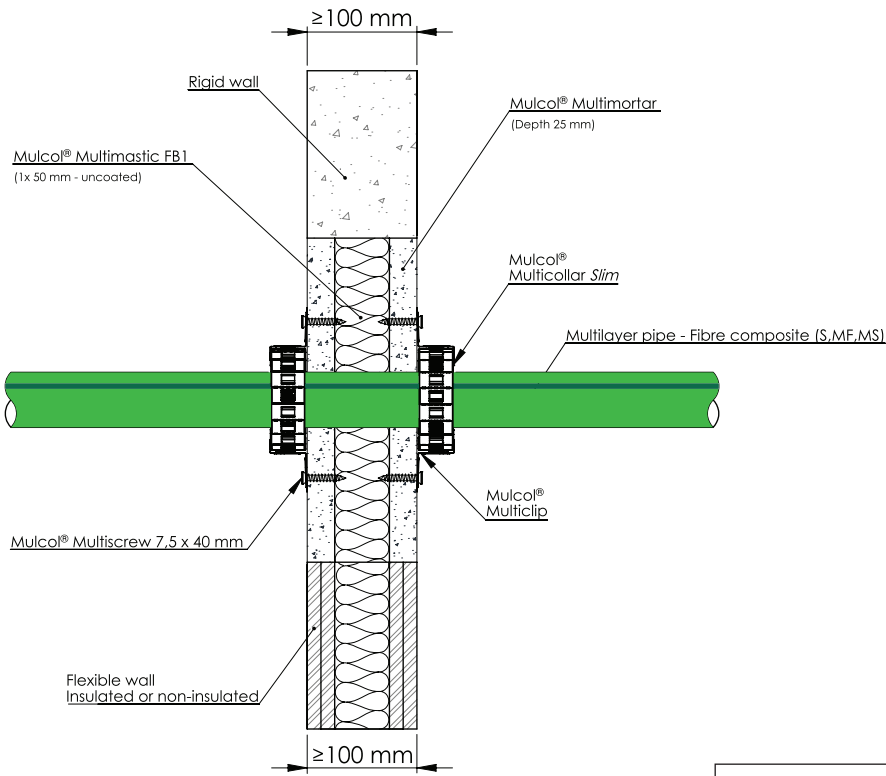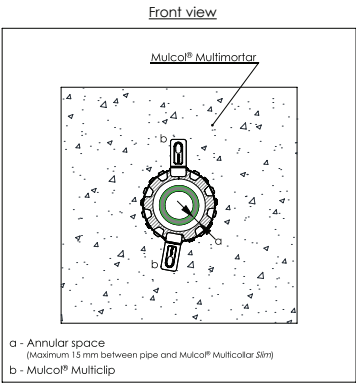

Drawing:
FW.E-MLF-MM3.4.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Green	≤ Ø 50	6.9	Multicollar Slim	EI 120 U/C



A.1.9

Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm -

Combustible pipes

A.1.9.4

Drinks tubing system

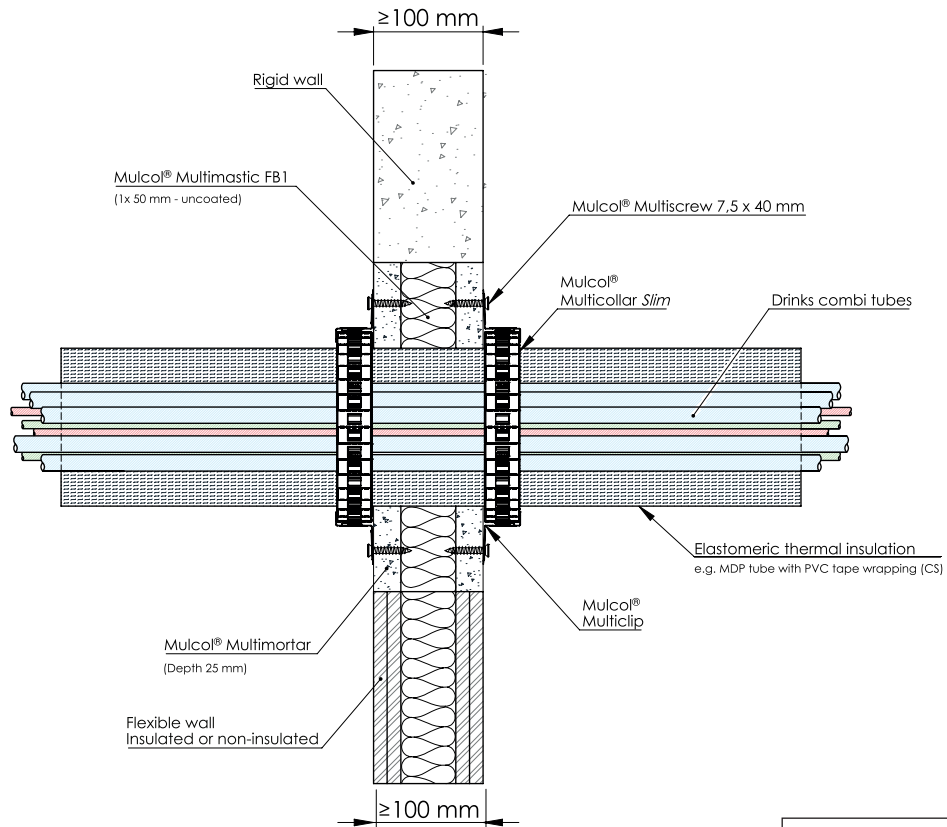
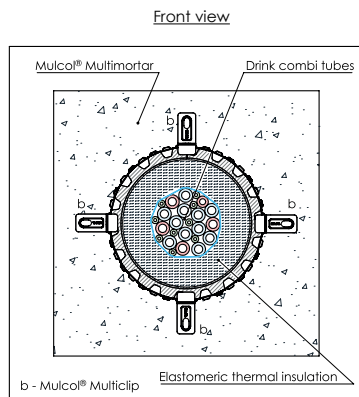


Drawing: FW.E-MC30-DCT52-MM3.4.10

Services	Dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Hoses no.	Type	Thickness (mm)	Configuration		
Drinks tubing system	$\leq \varnothing 145$	≤ 52	Elastomeric foam	8 - 35	CS	Multicollar <i>Slim</i>	EI 60 U/C

A.1.9
A.1.9.5

Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm - Combustible pipes
Rectangular plastic duct

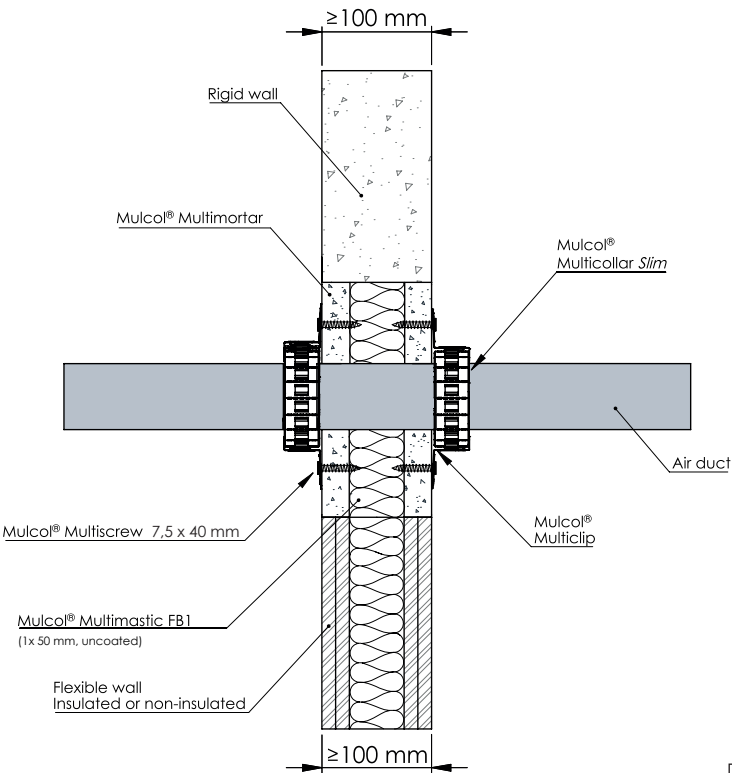
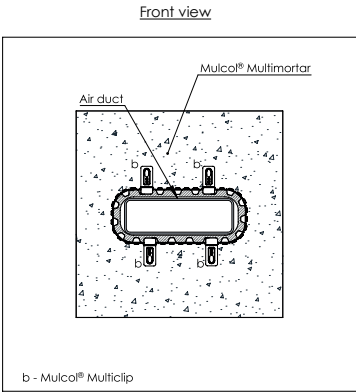


Drawing: FW.E-MC30-AD-MM3.4.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Rectangular plastic duct	≤ 220 x 90	1.0	Multicollar <i>Slim</i>	EI 45 U/C
		2.0		EI 120 U/C

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes

A.1.10.1 Plastic pipes

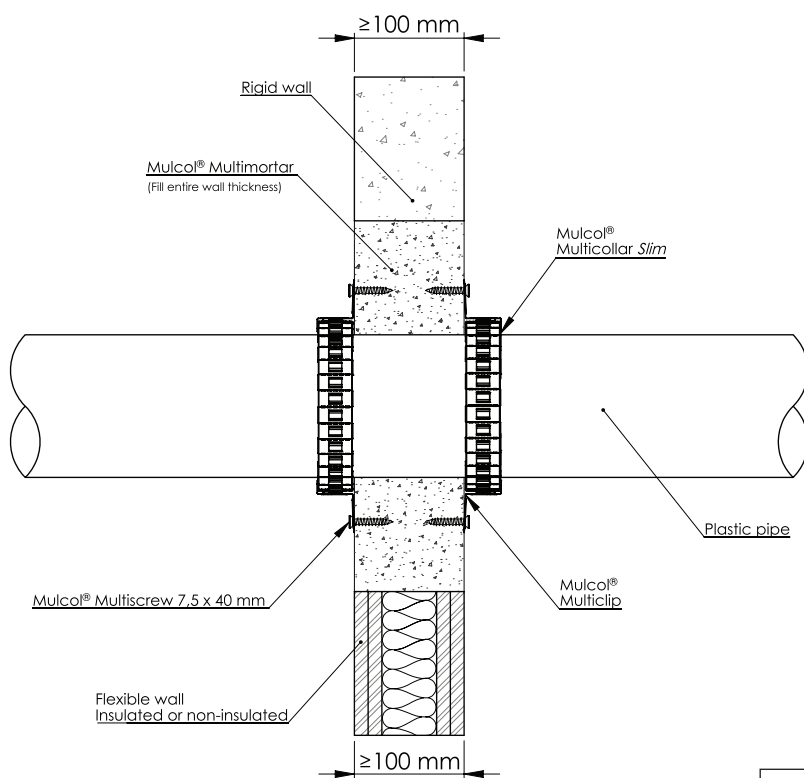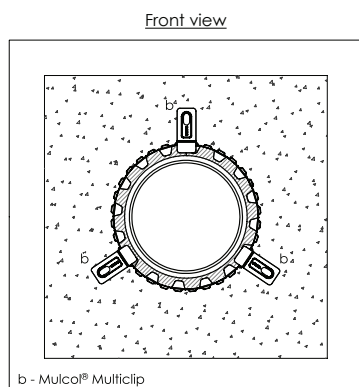

Drawing: FW.E-MC30-PP-MM1.2.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 40$	2.4 - 6.6	Multicollar <i>Slim</i>	EI 120 U/U
	$\leq \varnothing 50$	3.0 - 6.6		EI 90 U/U, E 120 U/U
	$\leq \varnothing 110$	2.7 - 6.6		EI 60 U/U
		6.6 - 7.4		EI 120 U/U
		7.4 - 10.0		EI 90 U/U, E 120 U/U
	$\leq \varnothing 125$	3.1 - 4.9		EI 45 U/U
		4.9 - 7.4		EI 90 U/C
		7.4 - 11.4		EI 90 U/U
		7.4 - 14.6		EI 30 U/U
	$\leq \varnothing 160$	4.0		EI 90 U/C
		4.0 - 14.6		

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes

A.1.10.1 Plastic pipes



Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	≤ Ø 160	4.0 - 9.5	Multicollar <i>Slim</i> double	EI 120 U/U
		9.5 - 14.6		EI 60 U/U
				EI 120 U/C
Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PP	≤ Ø 40	1.8 - 6.3	Multicollar <i>Slim</i>	EI 120 U/U
	≤ Ø 110	2.7 - 6.3		EI 90 U/U
		6.3 - 7.1		EI 120 U/U
	≤ Ø 125	3.1		EI 90 U/U, E 120 U/U
		3.1 - 7.1		EI 120 U/C
		3.1 - 9.1		EI 120 U/U
	≤ Ø 160	4.0		EI 45 U/U, E 60 U/U
		4.0 - 6.2		EI 30 U/U
		6.2 - 14.6		EI 120 U/C
		9.1		EI 120 U/U
		4.0	Multicollar <i>Slim</i> double	EI 90 U/U
		4.0 - 9.1		EI 60 U/U
		9.1 - 14.6		EI 120 U/C
Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PVC(-U/-C)	≤ Ø 40	1.9 - 9.3	Multicollar <i>Slim</i>	EI 120 U/U
	≤ Ø 110	2.2 - 9.3		EI 120 U/U
		9.3 - 12.3		EI 90 U/U, E 120 U/U
		12.3 - 14.6		EI 30 U/U
	≤ Ø 125	2.5 - 9.3		EI 120 U/U
		9.3 - 11.8		EI 90 U/U, E 120 U/U
		11.8 - 14.6		EI 30 U/U
	≤ Ø 160	1.8 - 11.8		EI 90 U/U, E 120 U/U
		11.8 - 14.6	EI 30 U/U	
		1.8 - 11.8	EI 120 U/U	
		11.8 - 14.6	EI 60 U/U	
	≤ Ø 315	7.7	Multicollar <i>Slim</i> double	EI 120 U/C
				EI 90 U/C

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes

A.1.10.2 Plastic pipes perpendicular to 45°

Front view

- a - Annular space
(Maximum 15 mm between pipe and Mulcol® Multicollar Slim)
b - Mulcol® Multiclip

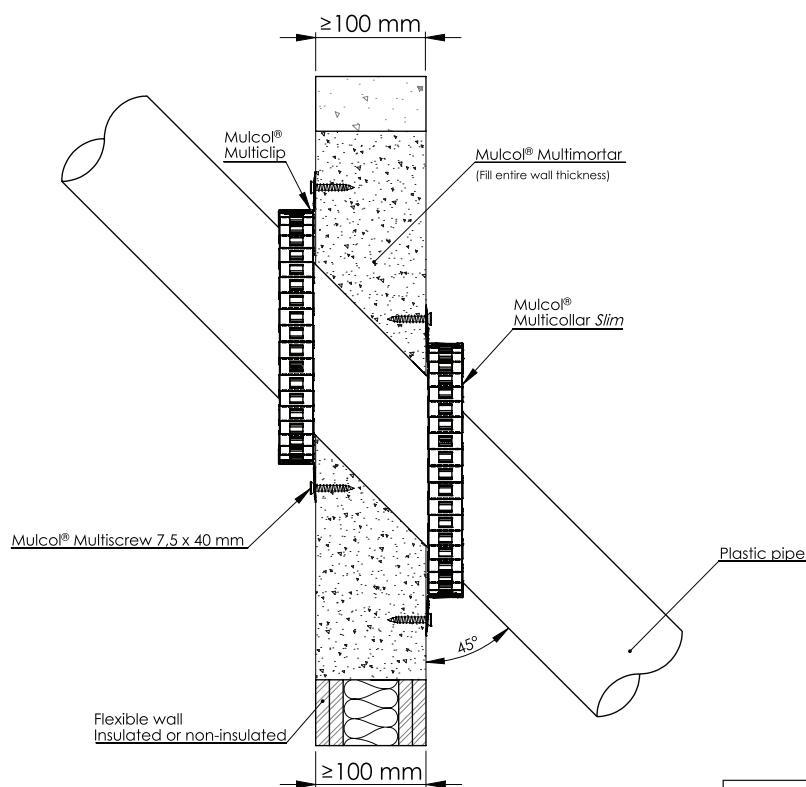
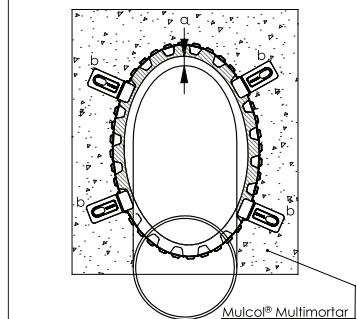


Drawing: FW.E-MC30o-PP-MM1.2.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	2.7	Multicollar Slim	EI 60 U/U, E 90 U/U
PP		2.5		EI 30 U/C, E 45 U/C
PVC(-U/-C)	$\leq \varnothing 125$	2.5	Multicollar Slim double	EI 120 U/C
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	3.4 - 10.0		EI 60 U/C
PP		3.4		EI 120 U/C
PVC(-U/-C)		3.4		EI 120 U/C

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes


A.1.10.3 Plastic pipes with elbow

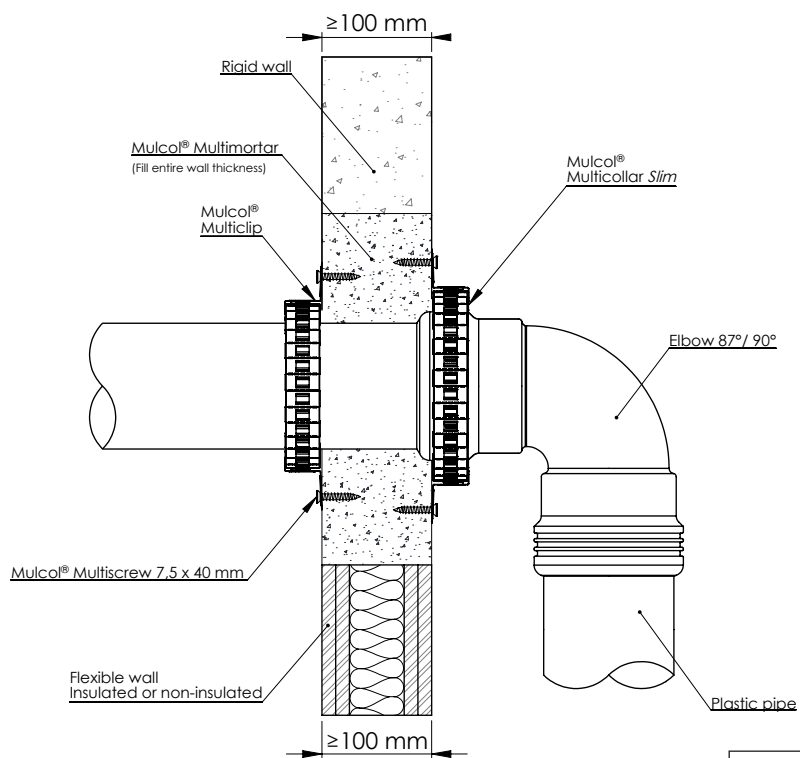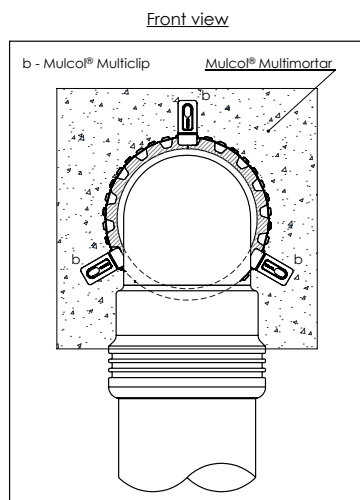

Drawing: FW.E-MC30-PP-MM1.2.70

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PP	$\leq \varnothing 125$	3.1	Multicollar <i>Slim</i>	EI 90 U/C
PVC(-U/-C)		2.5		EI 90 U/U



A.1.10.4 Plastic pipes with elbow and U-shape Multicollar *Slim*

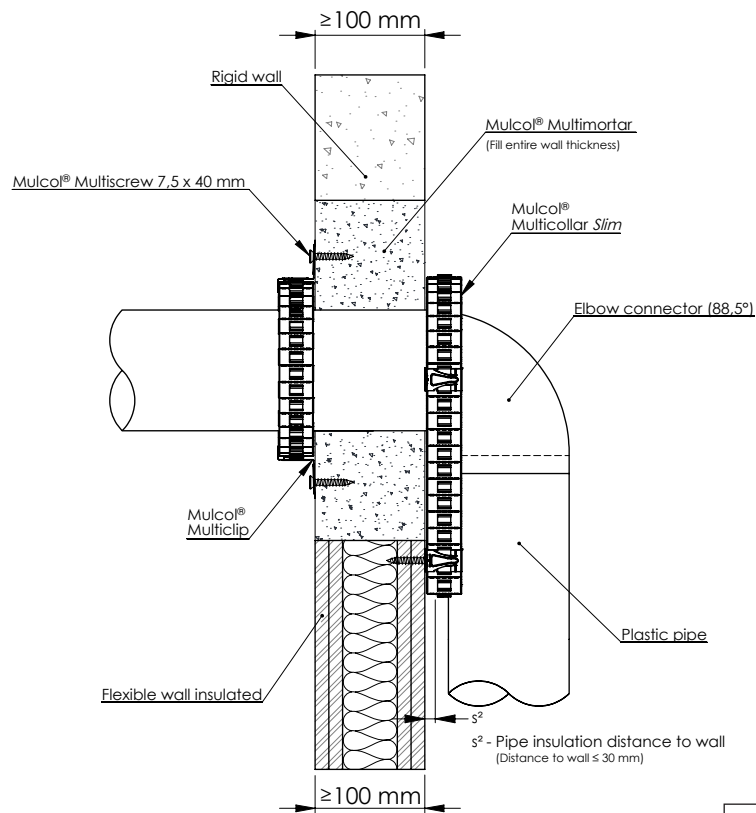

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	≤ Ø 110	3.4	Multicollar <i>Slim</i>	EI 120 U/C
PP				
PVC(-U/-C)				

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes

A.1.10.5 Plastic pipes (Silent)

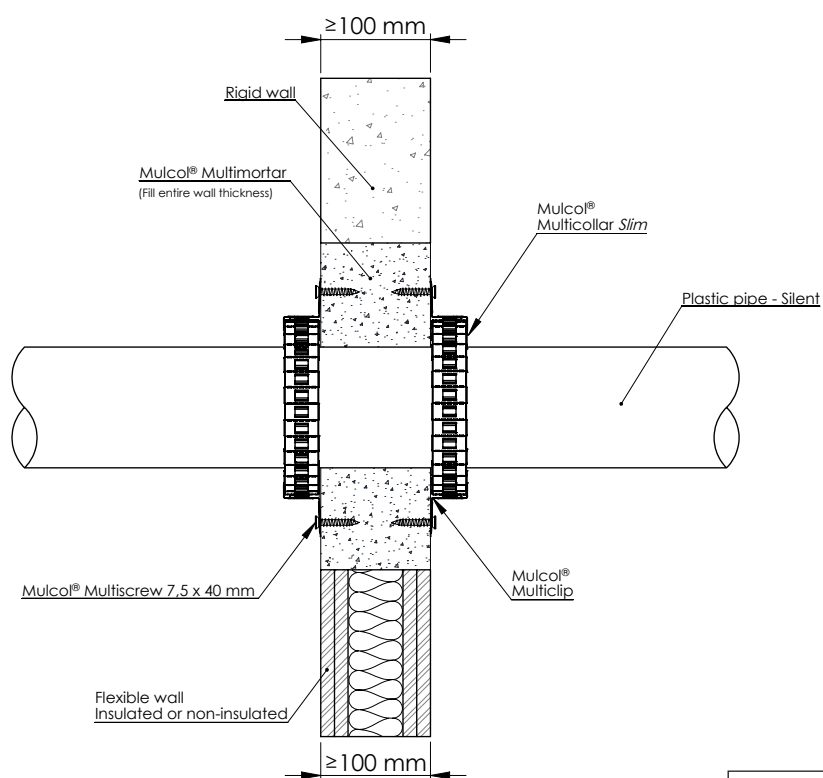
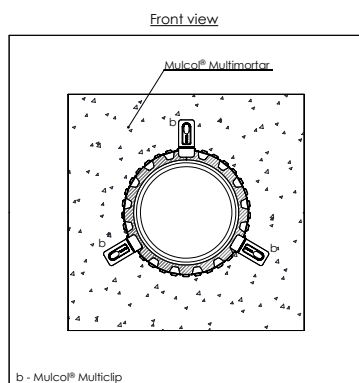


Drawing: FW.E-MC30-PPS-MM1.2.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Wavin SiTech+	$\leq \varnothing 32$	2.0	Multicollar Slim	EI 120 U/U
Geberit Silent dB 20	$\leq \varnothing 110$	3.6		EI 90 U/U, E 120 U/U
		6.0		EI 120 U/U
Wavin SiTech+	$\leq \varnothing 160$	5.0	double Multicollar Slim	EI 90 U/U, E 120 U/U

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes

A.1.10.6 Plastic pipes (Silent) with moulded socket

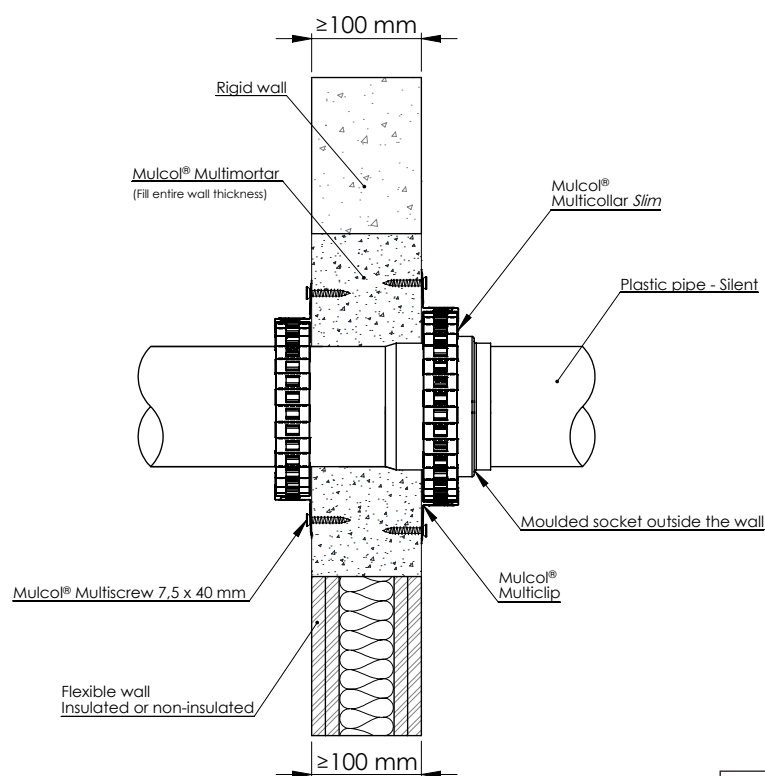
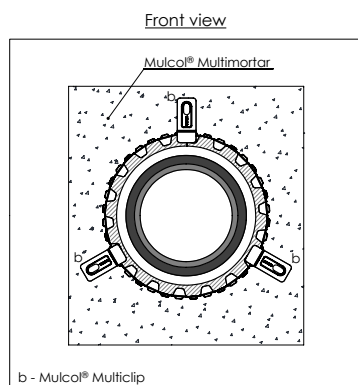


Drawing: FW.E-MC30-PPS-MM1.2.60

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Raupiano Plus	$\leq \varnothing 110$	2.7	Multicollars Slim	EI 120 U/C

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes

A.1.10.7 Plastic pipes (Silent) with elbow and U-shape Multicollar *Slim*


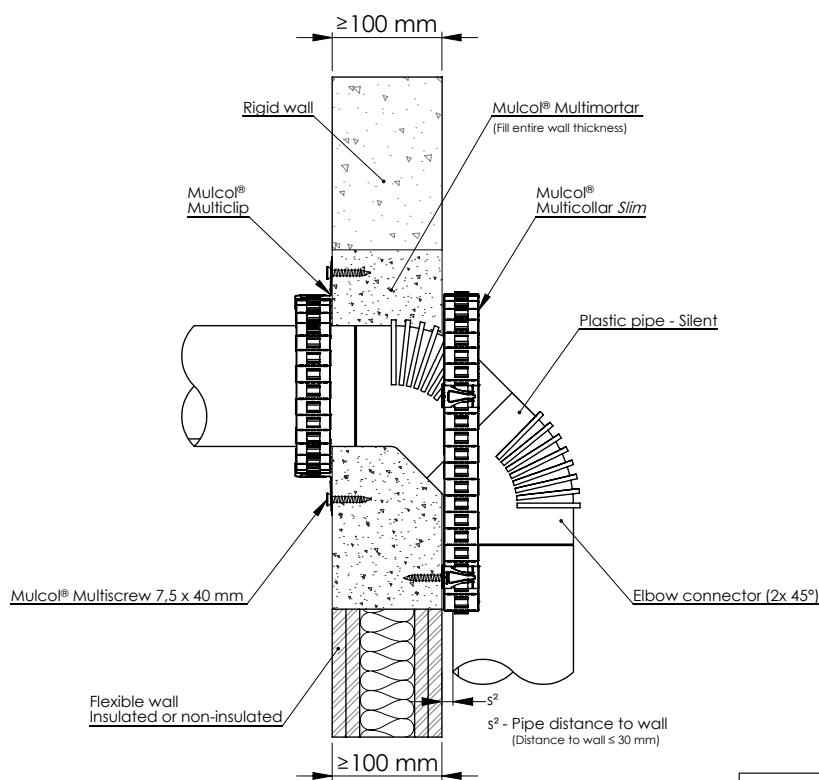
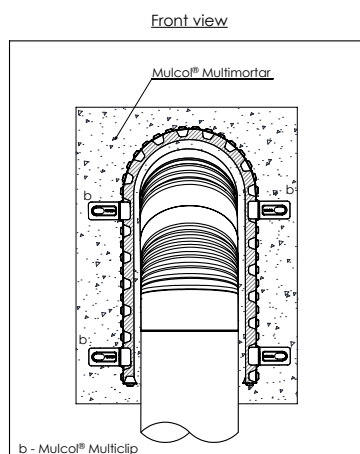


Drawing: FW.E-MC30u-PPS-MM1.2.80

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Wavin SiTech+	$\leq \varnothing 110$	3.6	Multicollar <i>Slim</i>	EI 60 U/U
Geberit Silent dB 20		6.0		EI 90 U/U, E 120 U/U

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes

A.1.10.8 Plastic pipes (Silent) in corner

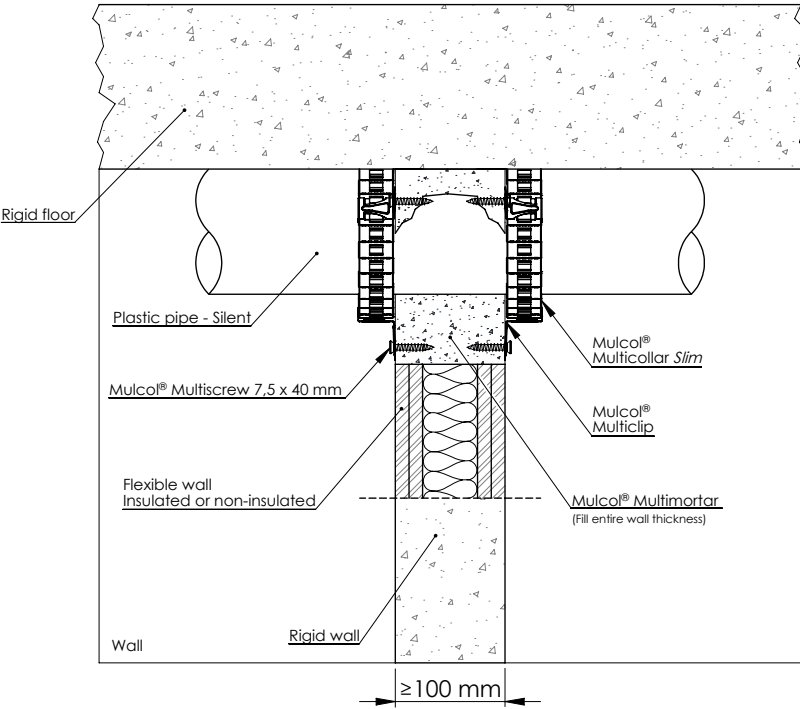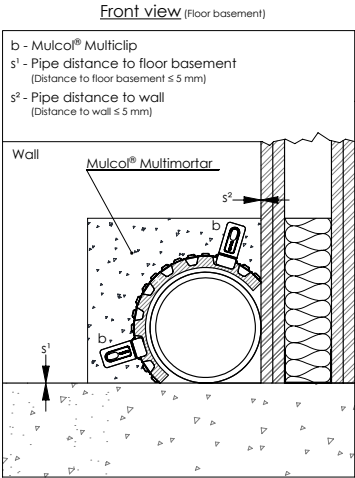
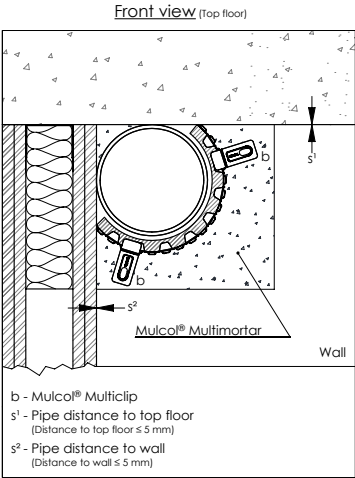


Drawing: FW.E-MC30c-PPS-MM1.2.10

Services	Pipe dimensions (mm)		Position	Product	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB 20	$\leq \varnothing 110$	6.0	Floor	Multicollor <i>Slim</i>	EI 120 U/U
			Ceiling		EI 60 U/U

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes

A.1.10.9 PP-R multilayer pipes

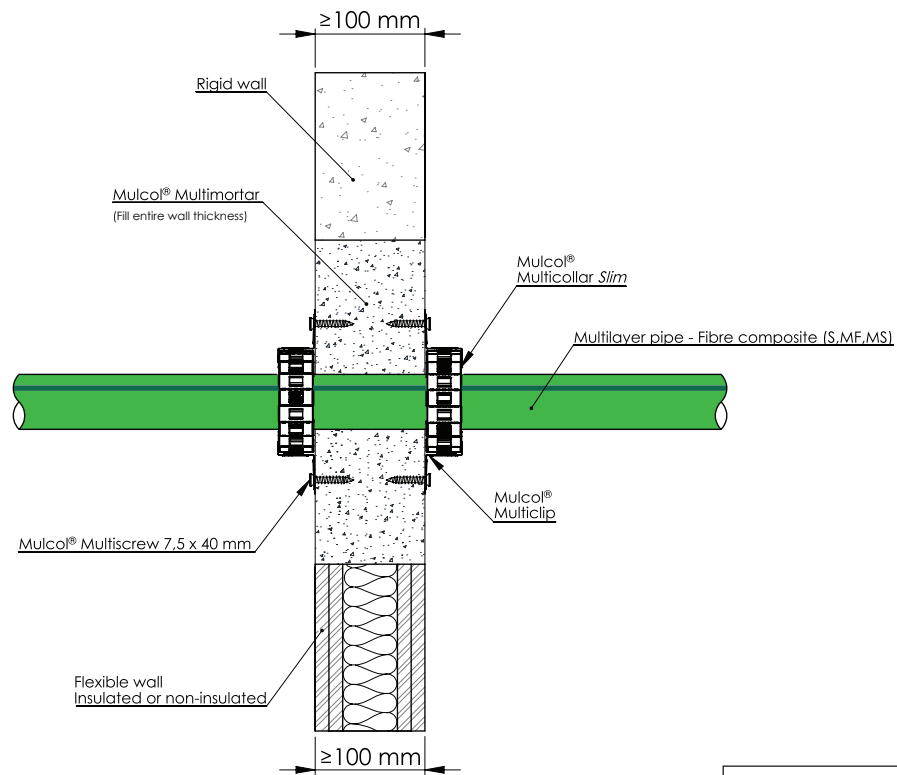
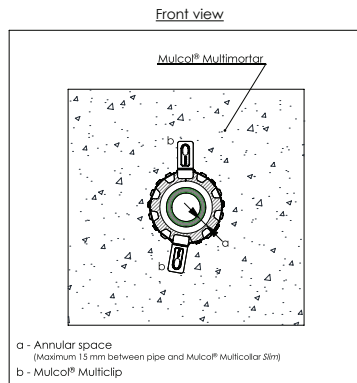


Drawing: FW.E-MLF-MM1.2.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Green	$\leq \varnothing 50$	6.9	Multicollar Slim	EI 60 U/U, E 90 U/U
Aquatherm Blue	$\leq \varnothing 20$	2.8		EI 90 U/C
	$\leq \varnothing 110$	10.0		EI 60 U/C
	$\leq \varnothing 160$	14.6		EI 90 U/C
Aquatherm Red	$\leq \varnothing 110$	15.1		EI 90 U/C

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes



A.1.10.10 PP-R multilayer pipes with elbow

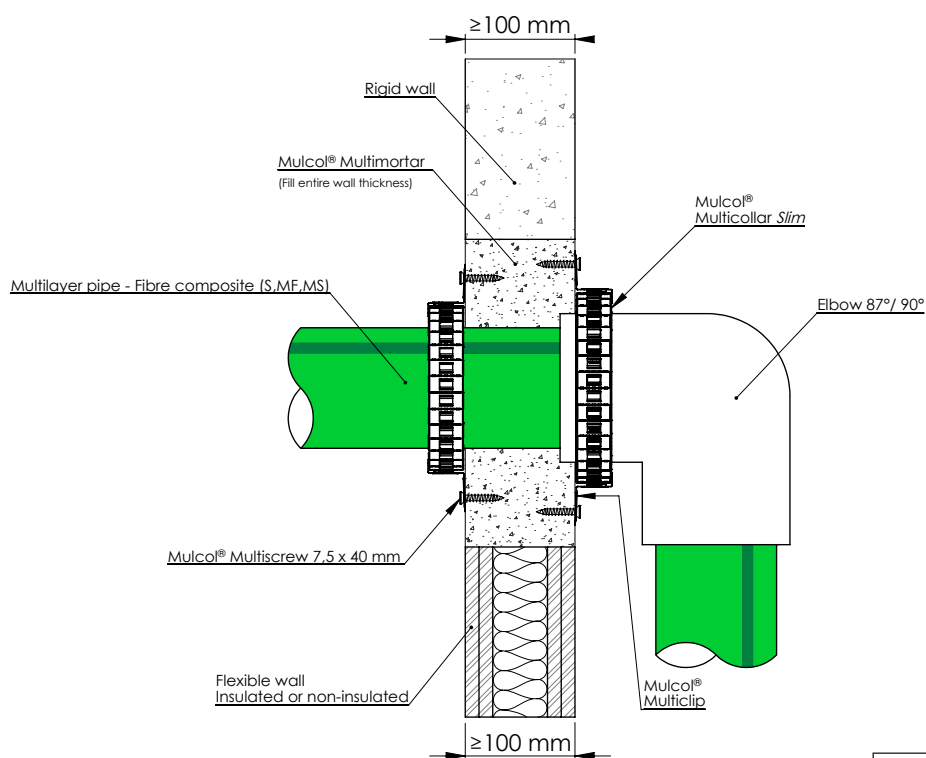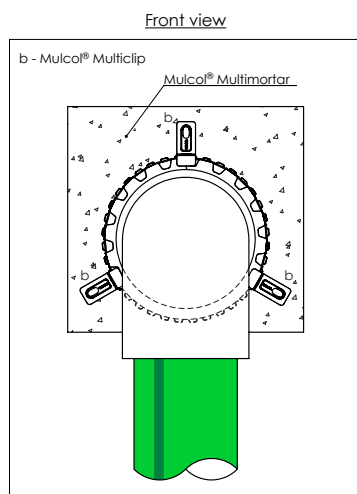

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Blue	$\leq \varnothing 110$	10.0	Multicollor <i>Slim</i>	EI 90 U/C, E 120 U/C

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes

A.1.10.11 Drinks tubing system

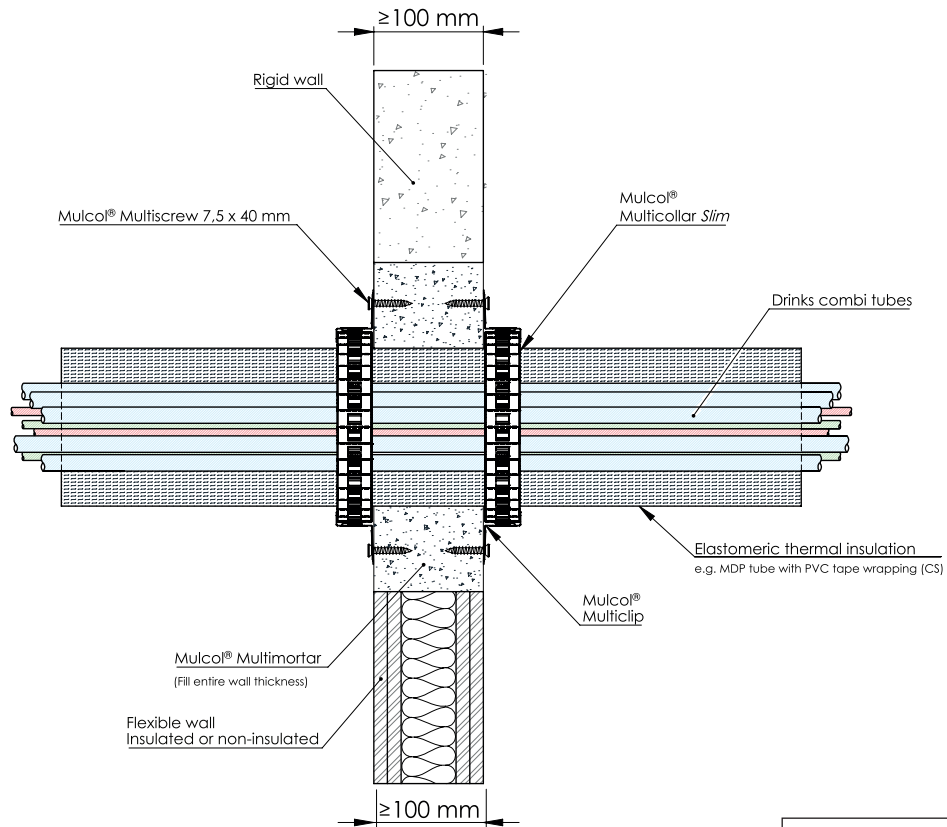
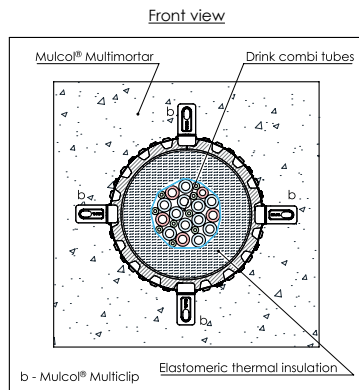


Drawing: FW.E-MC30-DCT52-MM1.2.10

Services	Dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Hoses no.	Type	Thickness (mm)	Configuration		
Drinks tubing system	$\leq \varnothing 47$	≤ 3	Elastomeric foam	8 - 35	CS	Multicollar Slim	EI 90 U/C
	$\leq \varnothing 145$	≤ 52					EI 60 U/C

A.1.10 Multimortar - ≥ 100 mm - Combustible pipes

A.1.10.12 Rectangular plastic duct

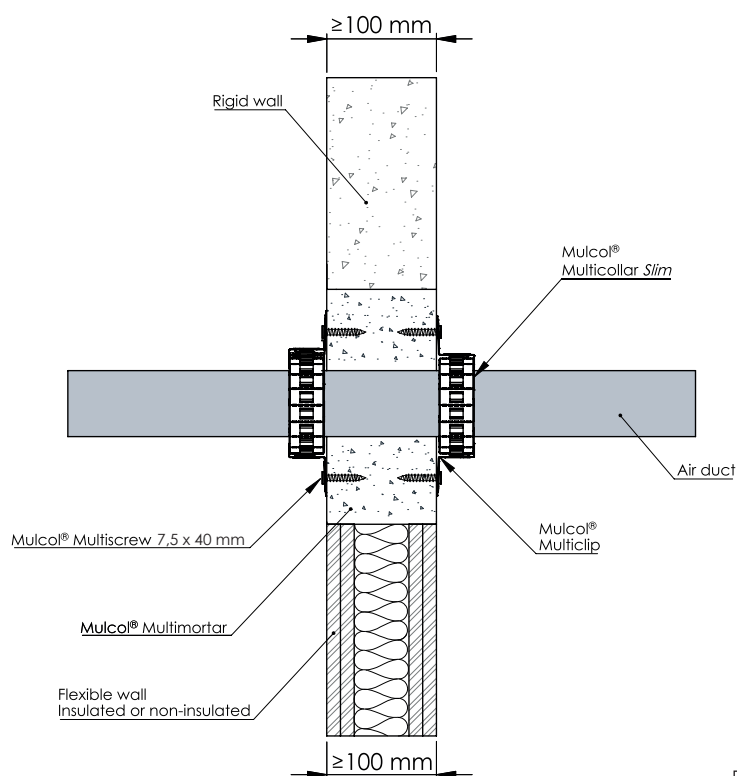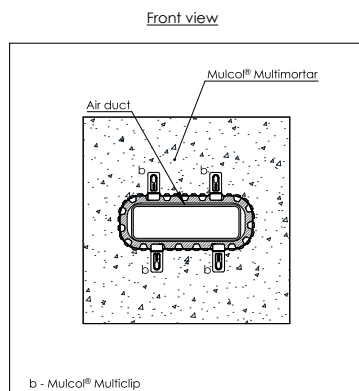


Drawing: FW.E-MC30-AD-MM1.2.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Rectangular plastic duct	$\leq 220 \times 90$	1.0	Multicollar Slim	EI 45 U/C
		2.0		EI 120 U/C

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.1 Plastic pipes

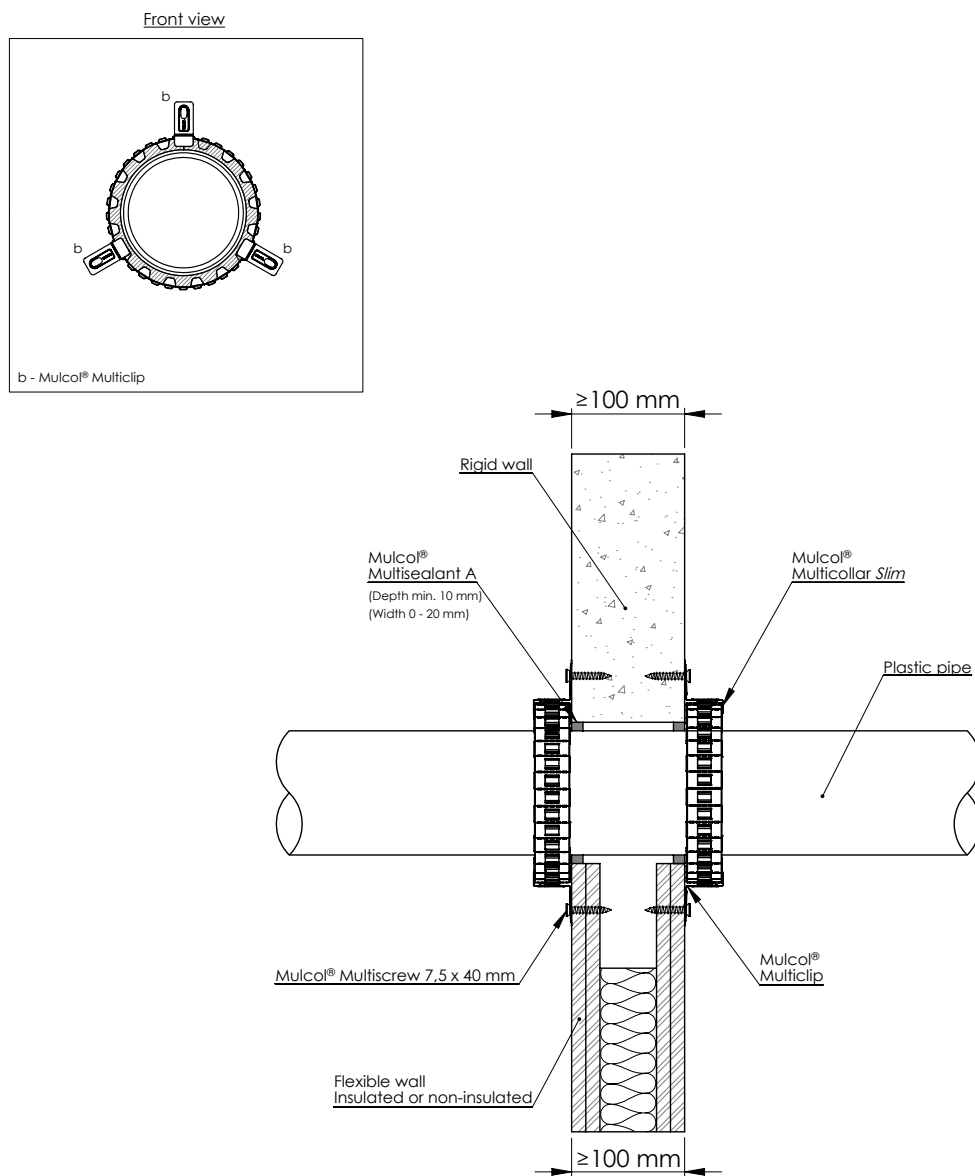

Drawing: FW.E-MC30-PP-10.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 40$	2.4 - 6.6	Multicollar Slim	EI 120 U/U
		6.6 - 14.6		EI 90 U/C
	$\leq \varnothing 50$	3.0 - 6.6		EI 120 U/U
	$\leq \varnothing 110$	3.1 - 6.6		EI 90 U/U, E 120 U/U
		6.6 - 7.4		EI 60 U/U
		7.4 - 10.0		EI 30 U/U
		10.0 - 14.6		EI 120 U/U
	$\leq \varnothing 125$	3.1 - 4.9		EI 90 U/U, E 120 U/U
		4.9 - 7.4		EI 45 U/U
		7.4 - 11.4		EI 30 U/U
		11.4 - 14.6		EI 90 U/C
		7.4 - 14.6		EI 90 U/U
	$\leq \varnothing 160$	4.0		EI 30 U/U
		4.0 - 14.6		EI 90 U/C

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes



A.1.11.1 Plastic pipes

Services	Pipe dimensions (mm)		Product	Classification	
	Outer dimension	Wall thickness			
PE-HD / PE-X / ABS / SAN+PVC	≤ Ø 160	4.0 - 9.5	Multicollar <i>Slim</i> double	EI 120 U/U	
		9.5 - 14.6		EI 60 U/U	
	≤ Ø 250	7.7		EI 120 U/C	
				EI 60 U/C	
Services	Pipe dimensions (mm)		Product	Classification	
	Outer dimension	Wall thickness			
PP	≤ Ø 40	6.3 - 9.1	Multicollar <i>Slim</i>	EI 120 U/C	
		1.8 - 6.3		EI 120 U/U	
	≤ Ø 110	2.7 - 6.3		EI 90 U/U	
		6.3 - 7.1		EI 30 U/U	
		7.1 - 14.6		EI 120 U/C	
		2.7 - 9.1		EI 120 U/U	
	≤ Ø 125	3.1		EI 90 U/U, E 120 U/U	
		3.1 - 7.1		EI 30 U/U	
		7.1 - 11.4		EI 120 U/C	
		3.1 - 9.1		EI 90 U/U, E 120 U/U	
	≤ Ø 160	4.0		EI 45 U/U, E 60 U/U	
		4.0 - 6.2		EI 30 U/U	
		6.2 - 14.6		EI 120 U/C	
		9.1		EI 90 U/C	
		4.0 - 9.1	Multicollar <i>Slim</i> double	EI 120 U/U	
		9.1 - 14.6		EI 60 U/U	
				EI 120 U/C	
Services	Pipe dimensions (mm)		Product	Classification	
	Outer dimension	Wall thickness			
PVC(-U/-C)	≤ Ø 40	1.9 - 9.3	Multicollar <i>Slim</i>	EI 120 U/U	
		9.3 - 12.3		EI 90 U/U, E 120 U/U	
		12.3 - 14.6		EI 30 U/U	
	≤ Ø 110	2.2 - 9.3		EI 120 U/U	
		9.3 - 12.3		EI 90 U/U, E 120 U/U	
		12.3 - 14.6		EI 30 U/U	
	≤ Ø 125	2.5 - 9.3		EI 120 U/U	
		9.3 - 11.8		EI 90 U/U, E 120 U/U	
		11.8 - 14.6		EI 30 U/U	
	≤ Ø 160	1.8 - 11.8		EI 90 U/U, E 120 U/U	
		11.8 - 14.6		EI 30 U/U	
		1.8 - 11.8	Multicollar <i>Slim</i> double	EI 120 U/U	
		11.8 - 14.6		EI 60 U/U	
	EI 120 U/C				
	≤ Ø 315	7.7	EI 90 U/C		

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.2 Plastic pipes perpendicular to 45°

Front view

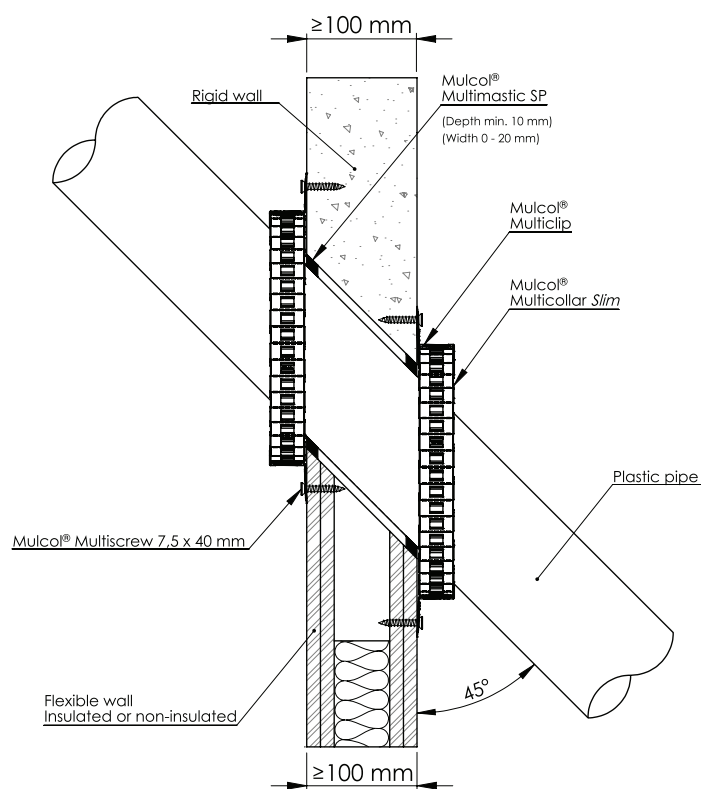
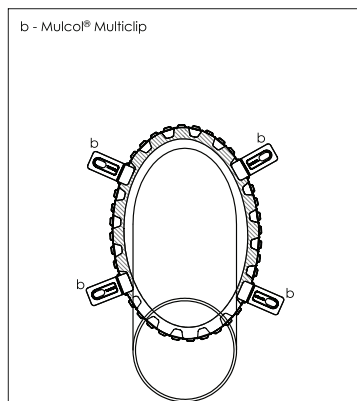


Drawing: FW.E-MC30o-PP-10.1.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7	Multicollar <i>Slim</i>	EI 60 U/C
		3.4 - 10.0	Multicollar <i>Slim</i> double	EI 120 U/C
PP		2.7	Multicollar <i>Slim</i>	EI 45 U/C, E 60 U/C
		3.4	Multicollar <i>Slim</i> double	EI 120 U/C
		3.4 - 10.0		EI 60 U/C
PVC(-U/-C)		2.7	Multicollar <i>Slim</i>	EI 45 U/C, E 60 U/C
		≤ Ø 125		2.5
		≤ Ø 110	3.4	Multicollar <i>Slim</i> double
	3.4 - 10.0		EI 60 U/C	

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.3 Plastic pipes - Elastomer LS 450 / CS

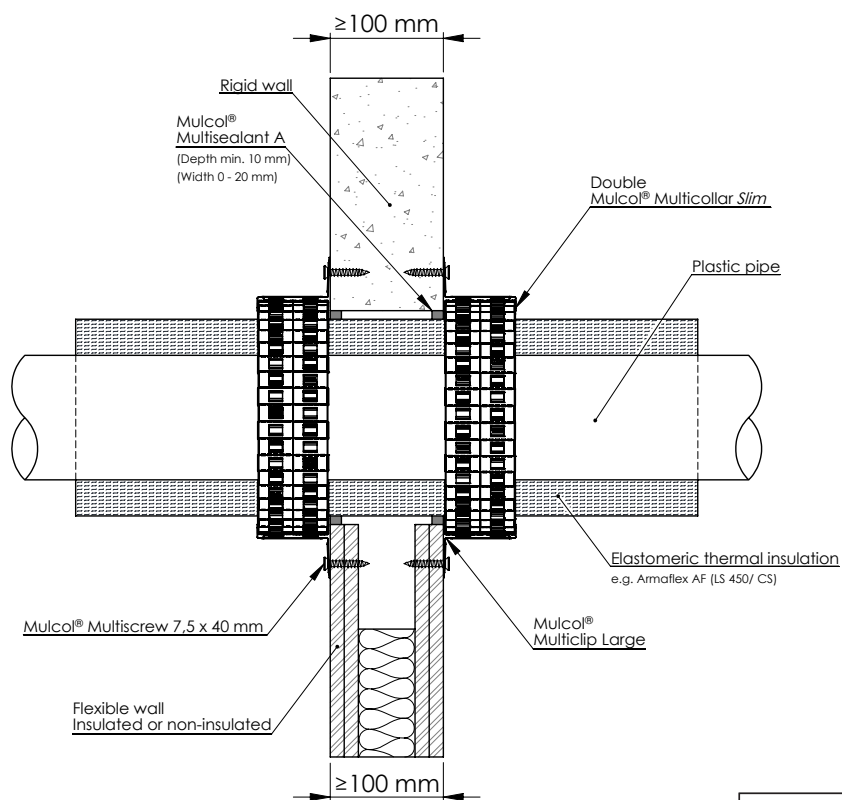
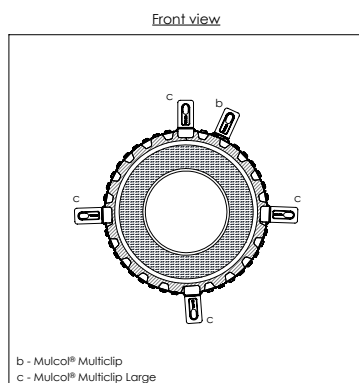


Drawing: FW.E-MC60-PP-20.0.22.LS

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
PVC(-U/-C)	$\leq \varnothing 110$	3.2	ArmaFlex AF (min. class B _L -s3, d0 B-s3, d0)	9 - 32	LS 450 / CS	Multicollar Slim double	EI 90 U/U E 120 U/U

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.4 Plastic pipes - Elastomer LI 450 / CI

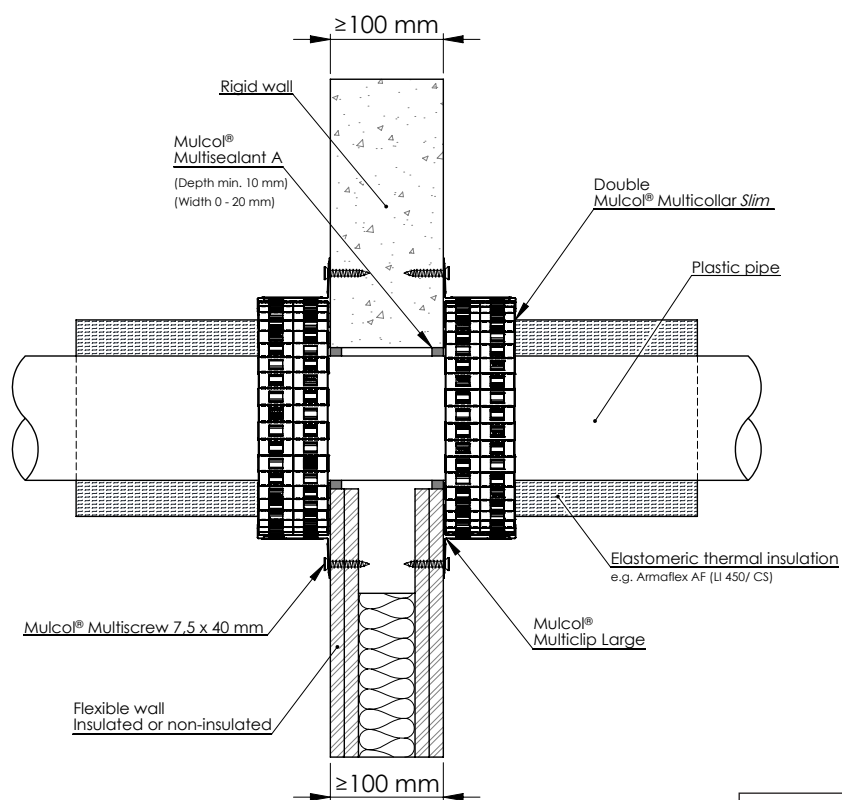
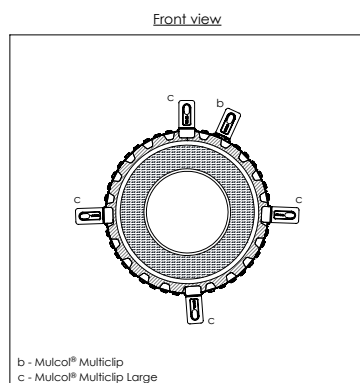


Drawing: FW.E-MC60-PP-20.0.22.LI

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
PVC(-U/-C)	$\leq \varnothing 110$	3.2	ArmaFlex AF (min. class B_L -s3, d0 B-s3, d0)	9 - 32	LI 450 / CI	Multicollar Slim double	EI 120 U/U

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.5 Plastic pipes with socket

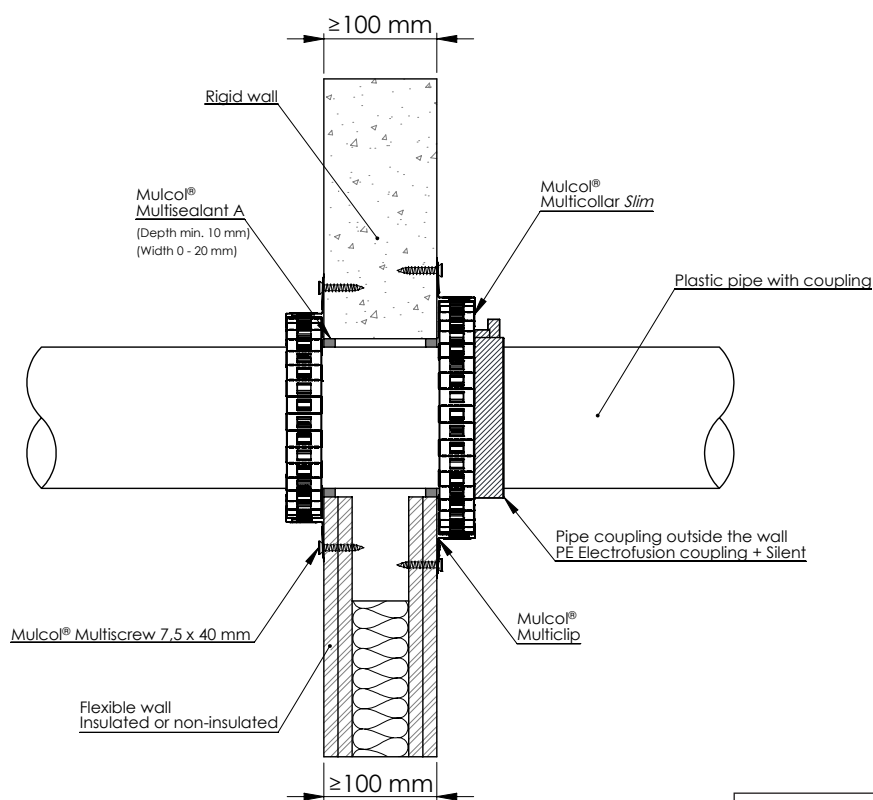
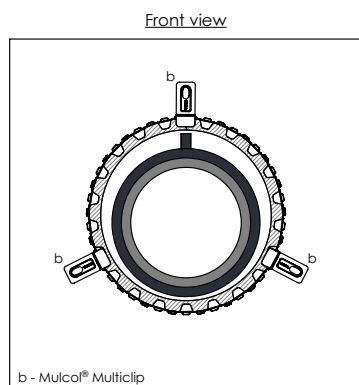


Drawing: FW.E-MC30-PP-10.0.60

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	4.3 - 7.4	Multicollar Slim	EI 120 U/C
	$\leq \varnothing 125$	7.4		EI 60 U/C, E 90 U/C

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.6 Plastic pipes with elbow

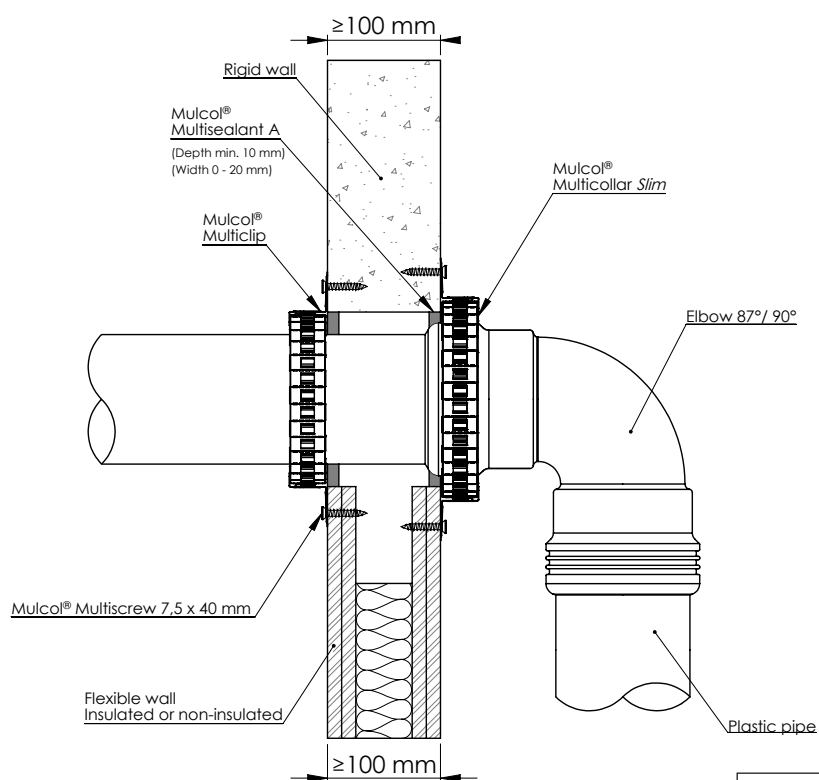
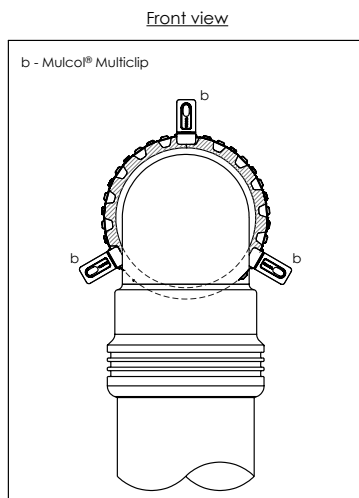


Drawing: FW.E-MC30-PP-10.0.70

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PP	$\leq \varnothing 125$	3.1	Multicollar Slim	EI 90 U/C
PVC(-U/-C)		2.5		EI 90 U/U

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.7 Plastic pipes with elbow and U-shape Multicollar *Slim*


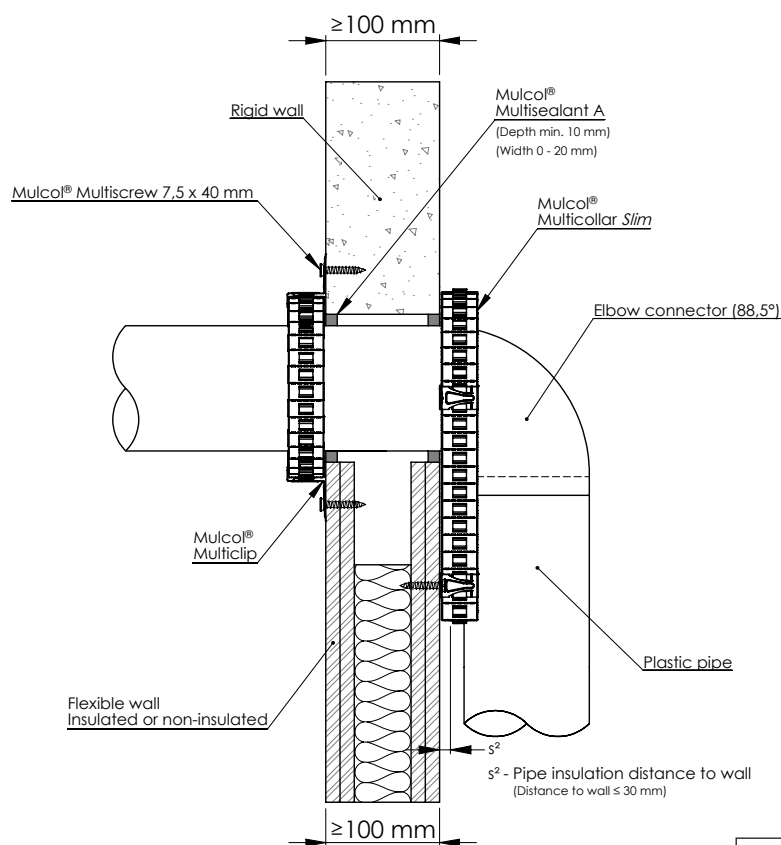
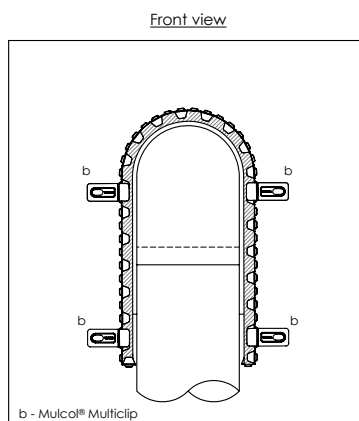


Drawing: FW.E-MC30u-PP-10.0.70

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	3.4	Multicollar <i>Slim</i>	EI 120 U/C
PP				
PVC(-U/-C)				

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.8 Plastic pipes in corner

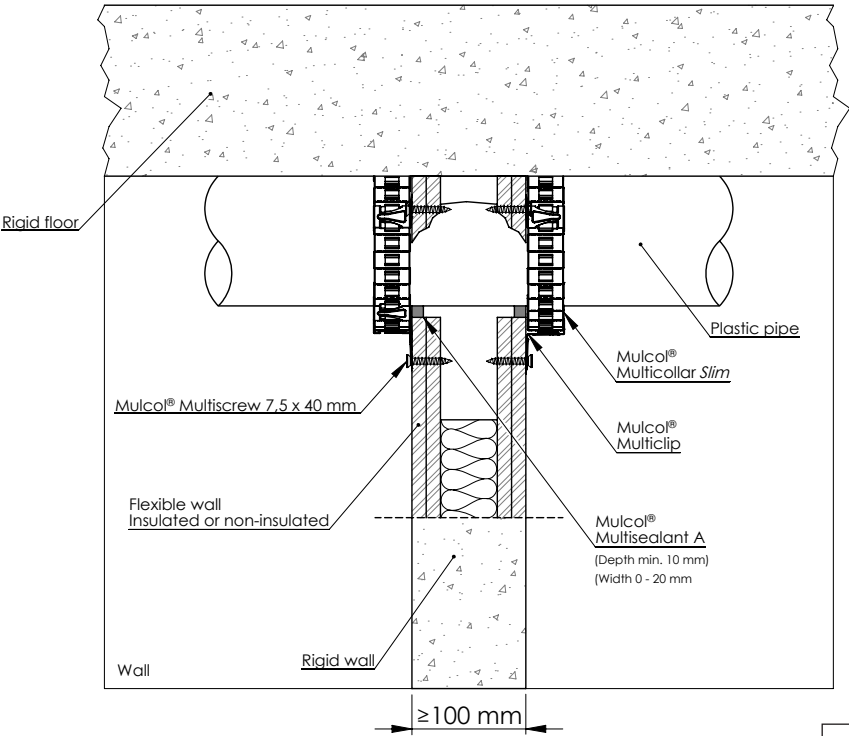
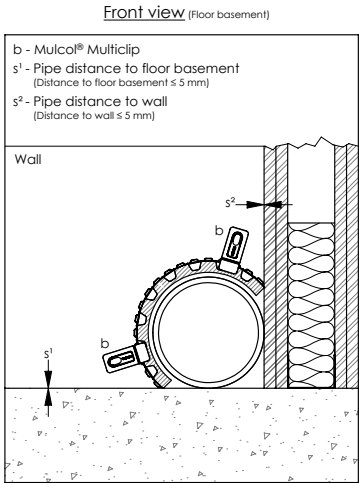
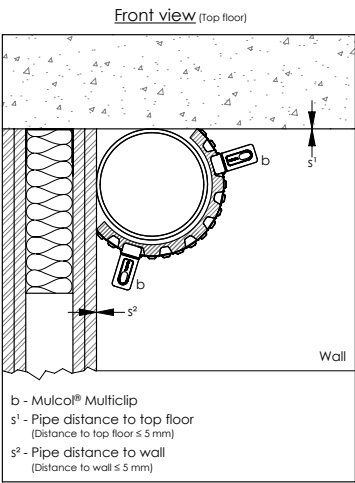


Drawing: FW.E-MC30f-PP-10.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PVC(-U/-C)	≤ Ø 110	2.2	Multicollar Slim	EI 90 U/U, E 120 U/U
		3.2		

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.9 Plastic pipes at zero distance to floor

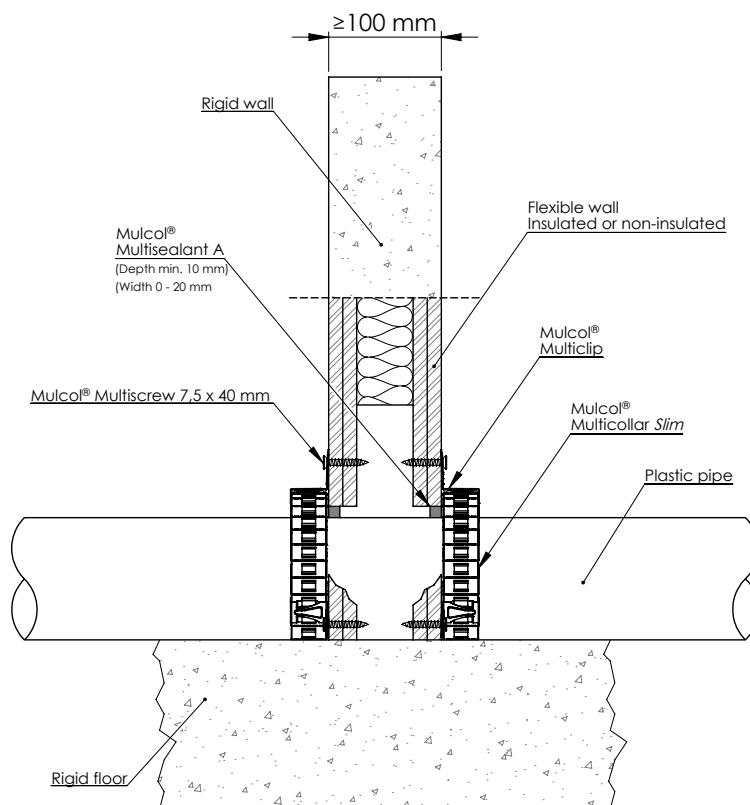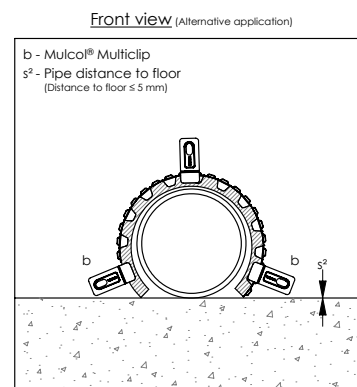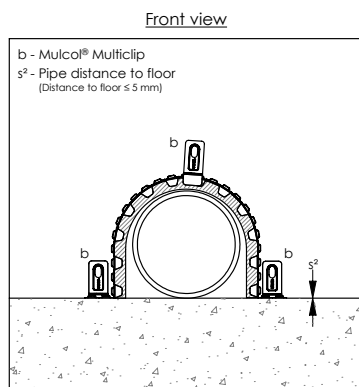



Drawing: FW.E-MC30f-PP-10.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 90$	2.8	Multicollar Slim	EI 90 U/U
PVC(-U/-C)	$\leq \varnothing 110$	2.2		

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.10 Plastic pipes in conduit

Front view

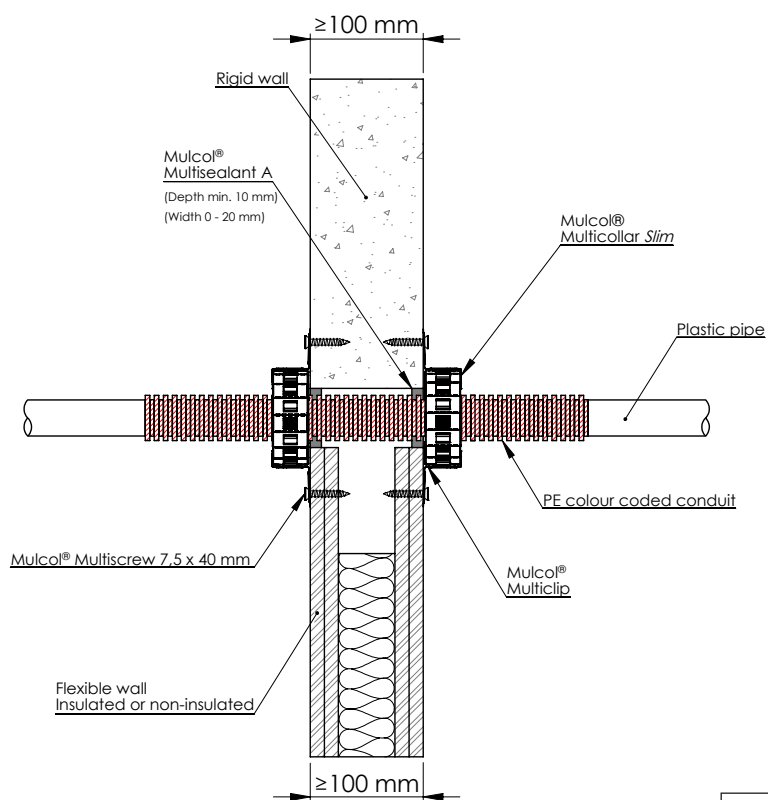
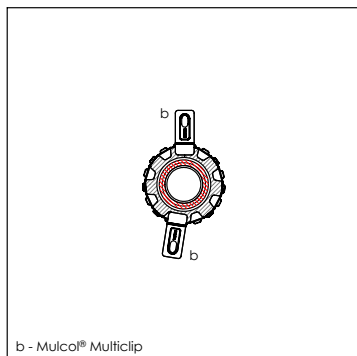


Drawing: FW.E-MC30-PP-10.0.30

Services	Pipe dimensions (mm)		Type	Insulation		Product	Classification
	Outer dimensions	Wall thickness		Diameter (mm)	Configuration		
PE-Xa	$\leq \varnothing 25$	3.5	PE conduit	32	LS 300 / CS LI 300 / CI	Multicollar <i>Slim</i>	EI 90 U/C

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.11 Plastic pipes - Steel half shell support

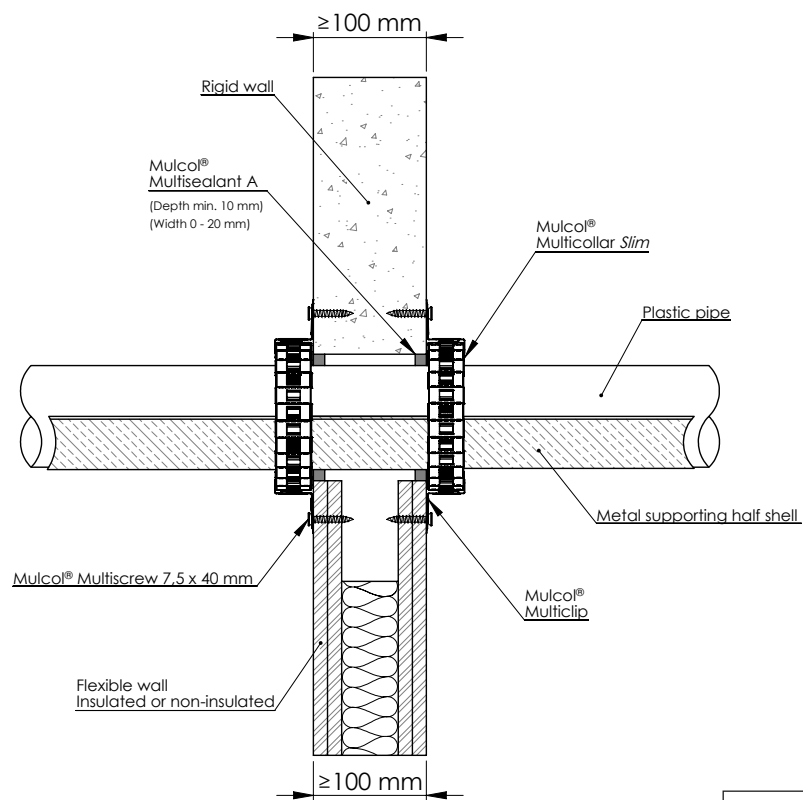
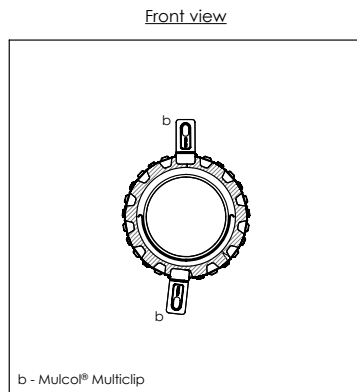


Drawing: FW.E-MC30-PP-10.0.50

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 90$	2.8	Multicollar Slim	EI 90 U/C

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.12 Plastic pipes (Silent)

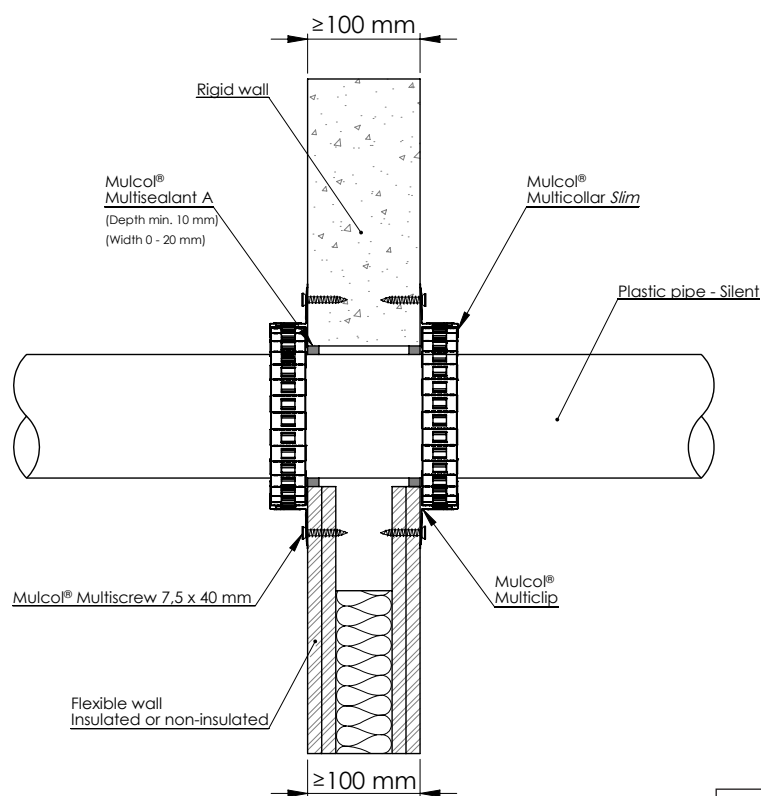
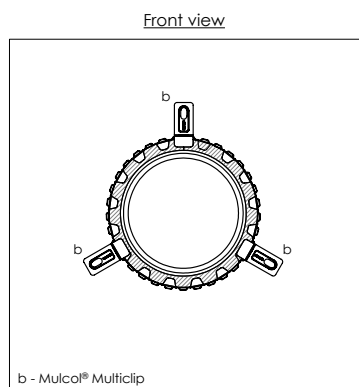


Drawing: FW.E-MC30-PPS-10.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Wavin SiTech+	$\leq \varnothing 32$	2.0 - 3.6	Multicollar Slim	EI 120 U/U
Geberit Silent dB 20	$\leq \varnothing 110$	3.6		EI 90 U/U, E 120 U/U
		6.0		EI 120 U/U
Wavin SiTech+	$\leq \varnothing 160$	5.0	Multicollar Slim double	EI 90 U/U, E 120 U/U

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.13 Plastic pipes (Silent) with socket

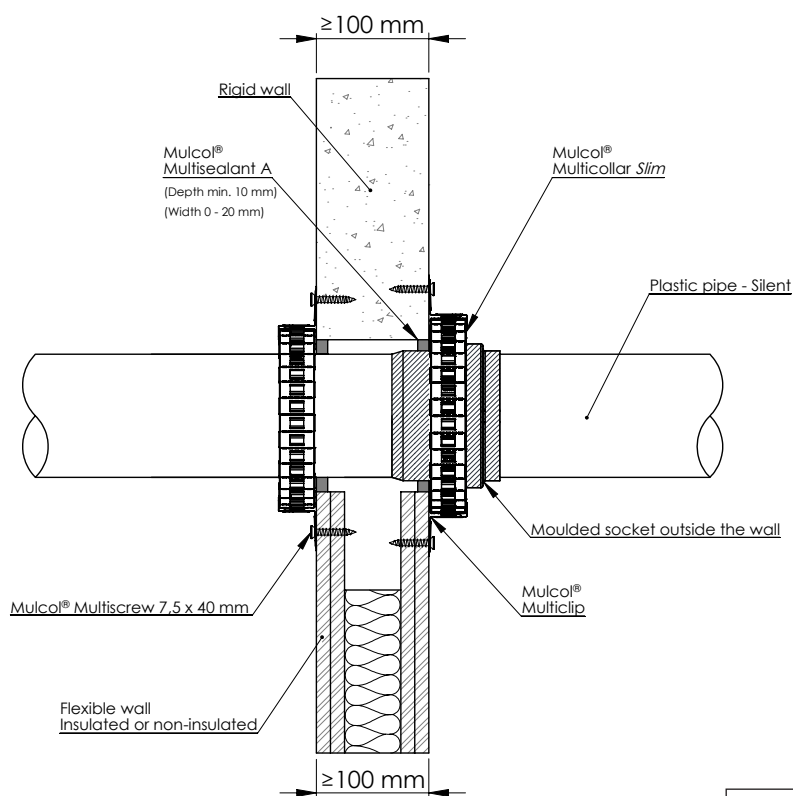
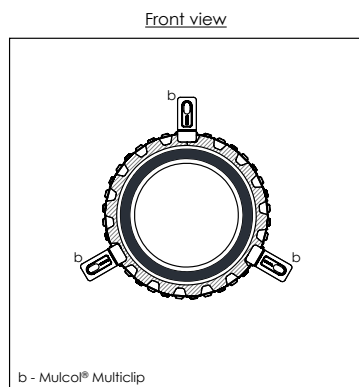


Drawing: FW.E-MC30-PPS-10.0.60

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Raupiano Plus	$\leq \varnothing 110$	2.7	Multicollar Slim	EI 120 U/C

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.14 Plastic pipes (Silent) with elbow


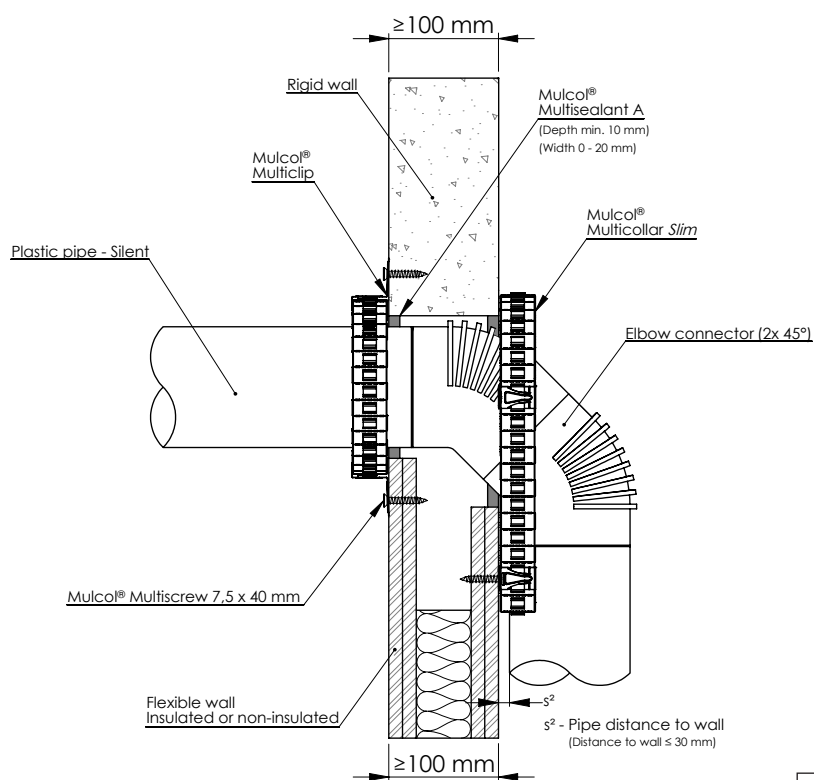
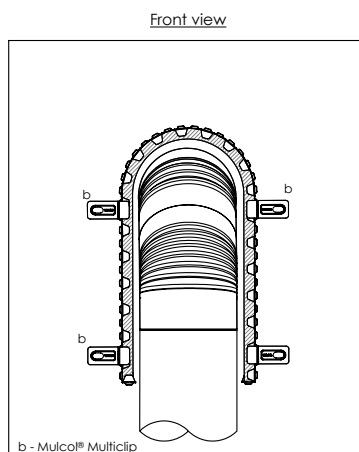


Drawing: FW.E-MC30u-PPS-10.0.80

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Wavin SiTech+	$\leq \varnothing 110$	3.6	Multicollor Slim	EI 60 U/U
Geberit Silent dB 20		6.0		EI 90 U/U, E 120 U/U

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.15 Plastic pipes (Silent) in corner

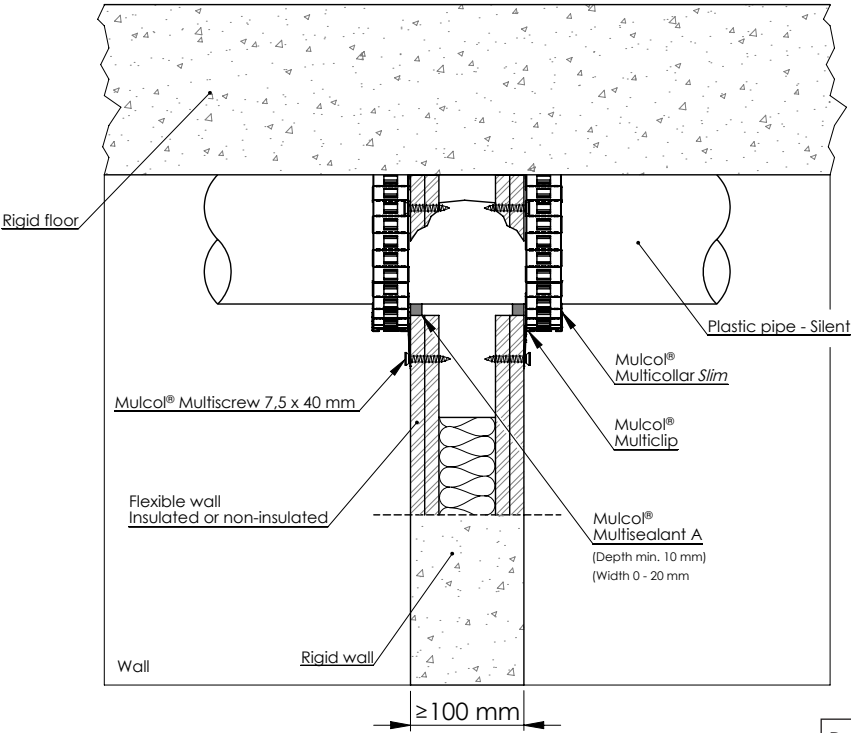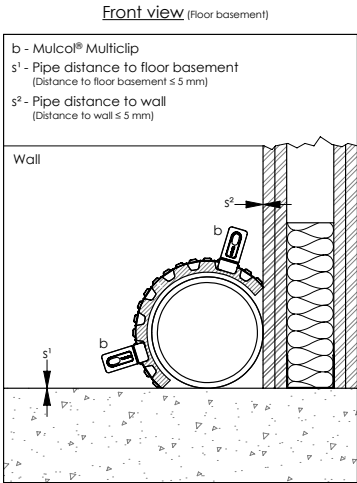
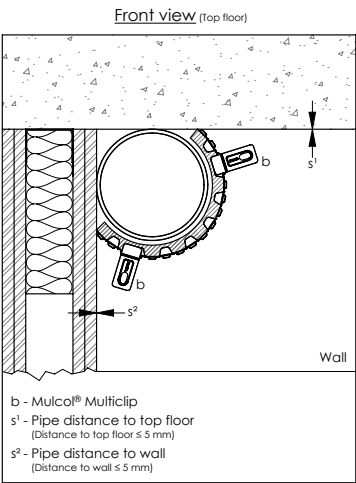


Drawing: FW.E-MC30c-PPS-10.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Geberit Silent dB 20, bottom corner	≤ Ø 110	6.0	Multicollar Slim	EI 120 U/U
Geberit Silent dB 20, top corner				EI 60 U/U

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.16 PP-R Multilayer pipes

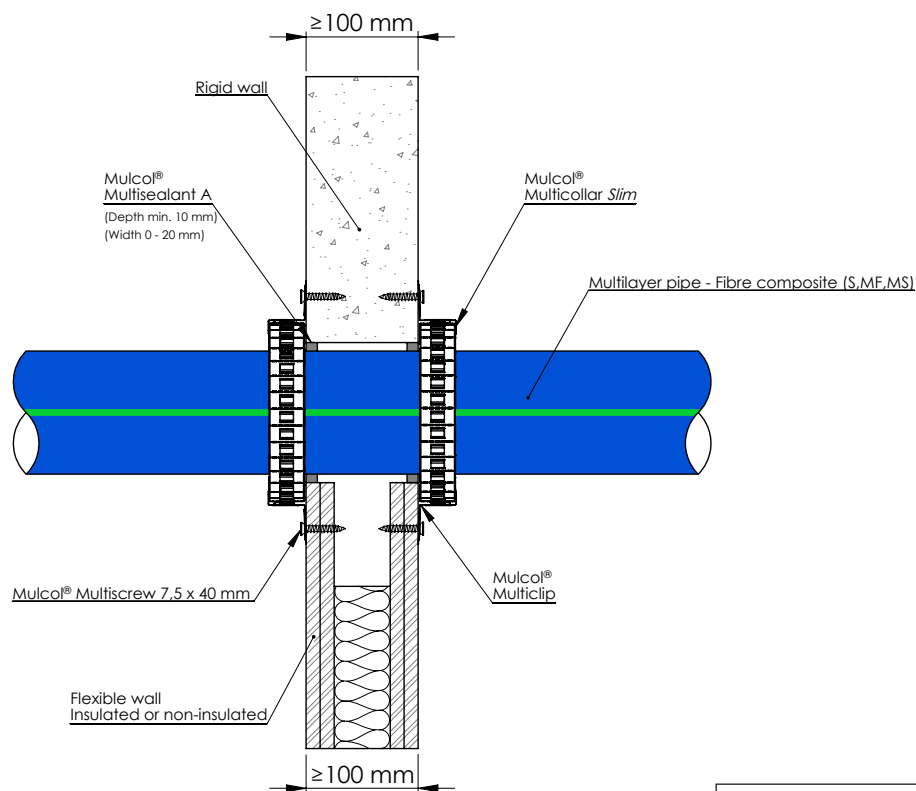
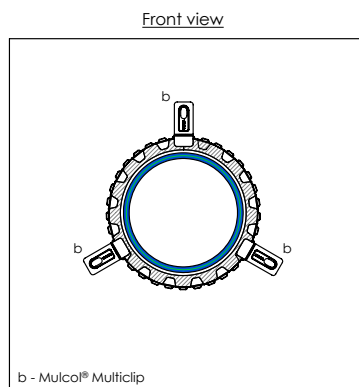


Drawing: FW.E-MC30-MLF-10.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Blue-MF	$\leq \varnothing 20$	2.8	Multicollar Slim	EI 90 U/C
	$\leq \varnothing 110$	10.0		EI 60 U/C
	$\leq \varnothing 160$	14.6		EI 90 U/C
Aquatherm Red-MF	$\leq \varnothing 110$	15.1		

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.17 PP-R Multilayer pipes - Elastomer LS 500 / CS

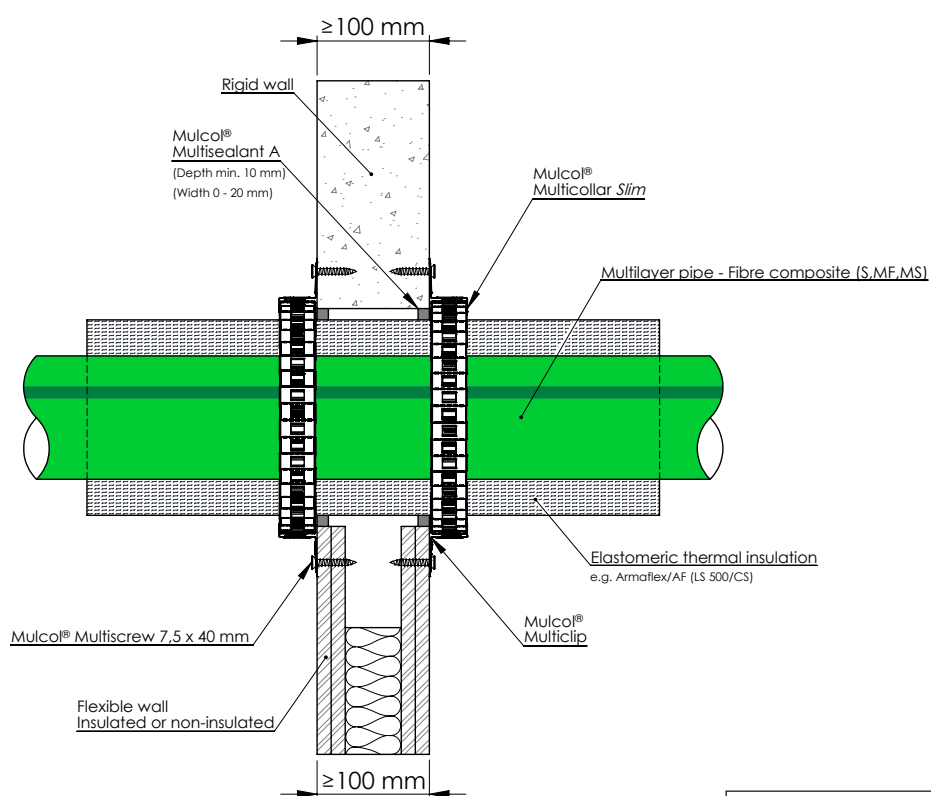
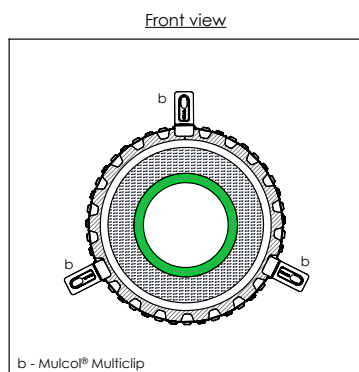


Drawing: FW.E-MC30-MLF-10.0.22.LS

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
Aquatherm Green-S	≤ Ø 110	18.3	ArmaFlex AF (min. class B _L -s3, d0 B-s3, d0)	9 - 32	LS 500 / CS	Multicollar <i>Slim</i>	EI 90 U/C
Aquatherm Green-MS		15.2					
Aquatherm Green-MF		15.1					
Aquatherm Blue-MF	≤ Ø 20	2.8		9			EI 120 U/C
	≤ Ø 110	10.0					EI 90 U/C E 120 U/C

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.18 PP-R Multilayer pipes - Elastomer LI 300 / CI

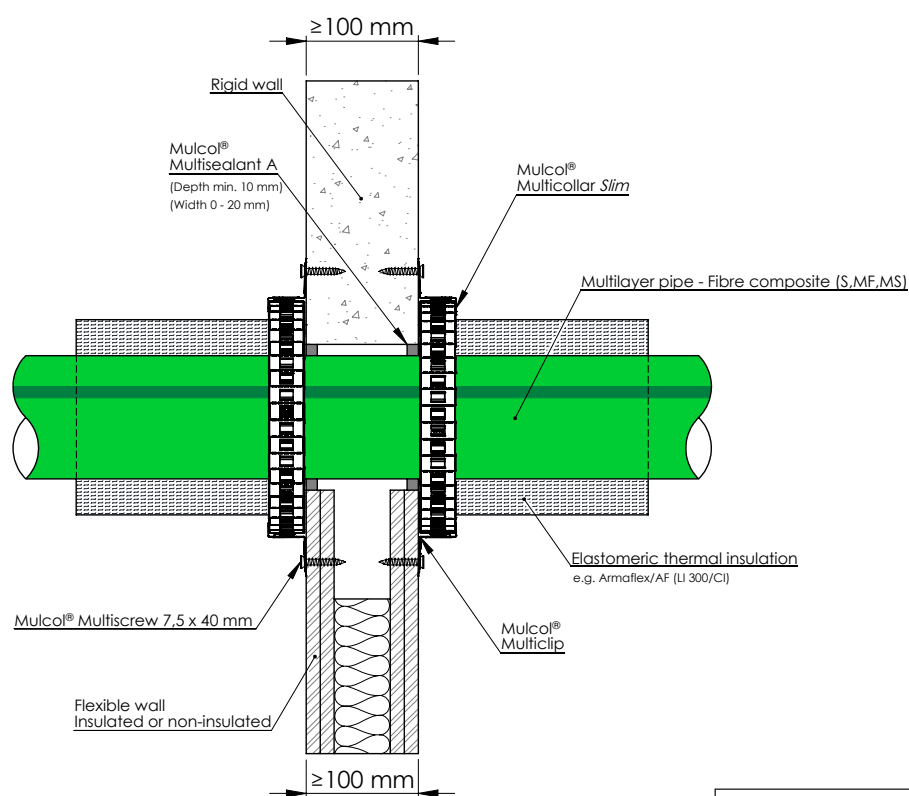
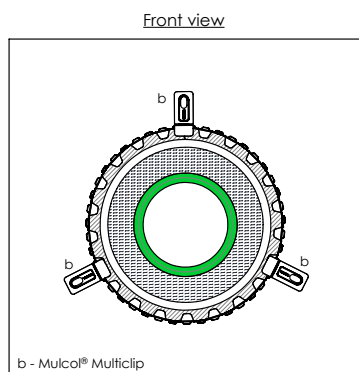


Drawing: FW.E-MC30-MLF-10.0.22.LI

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
Aquatherm Blue-MF	≤ Ø 110	10.0 - 14.6	ArmaFlex AF (min. class B _L -s3, d0 B-s3, d0)	9 - 32	LI 300 / CI	Multicollar <i>Slim</i>	EI 90 U/C
	≤ Ø 160	14.6		32			EI 120 U/C
	≤ Ø 110	10.0 - 14.6					
	≤ Ø 160	14.6					

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.19 PP-R Multilayer pipes with elbow

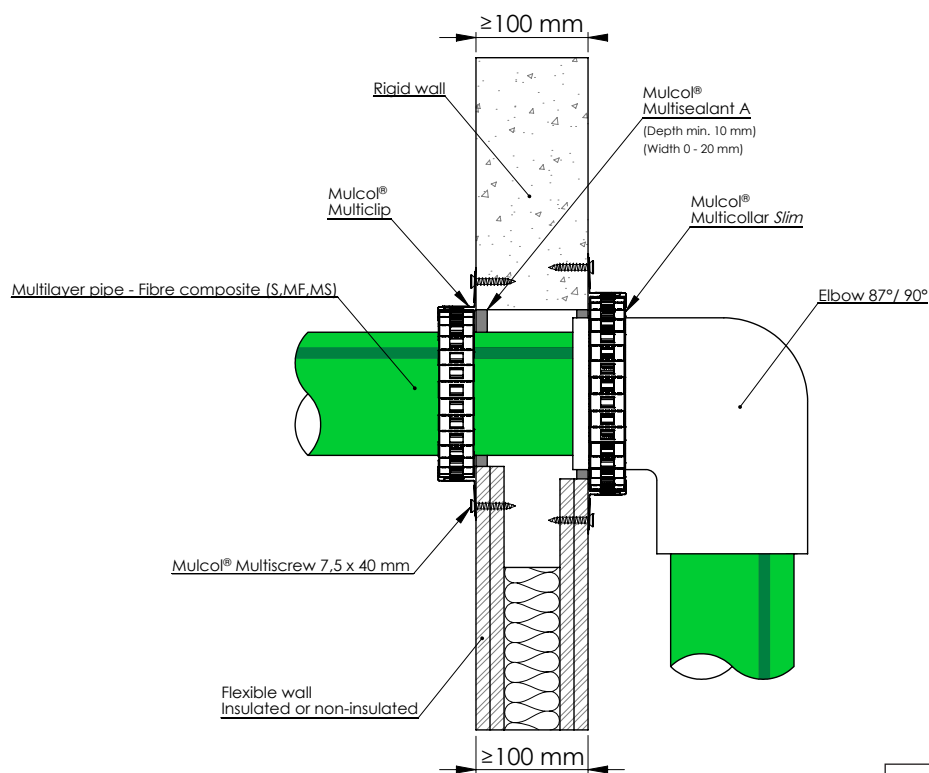
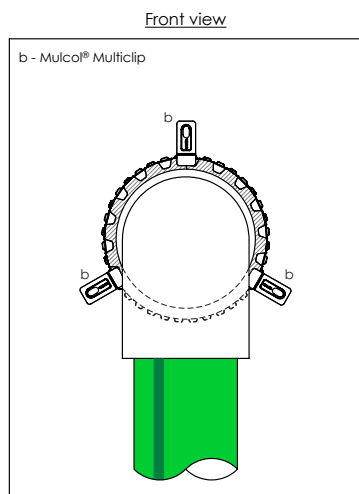


Drawing: FW.E-MC30-MLF-10.0.70

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Blue-MF	$\leq \varnothing 110$	10.0	Multicollar Slim	EI 90 U/C, E 120 U/C

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.20 PP-R Multilayer pipes - Steel half shell support


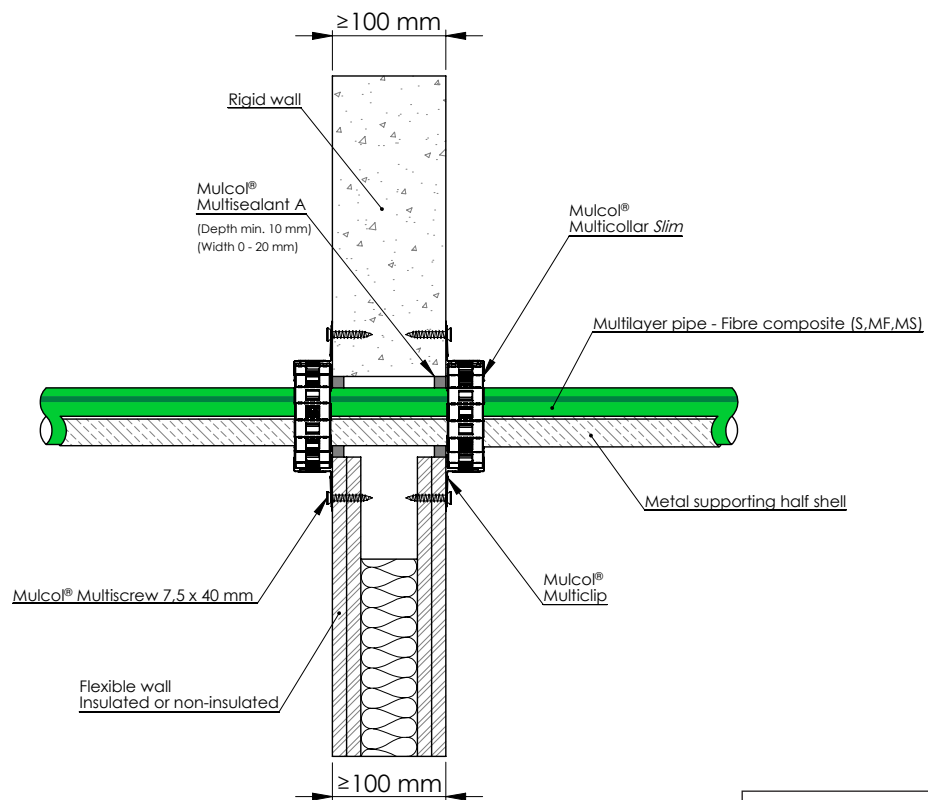
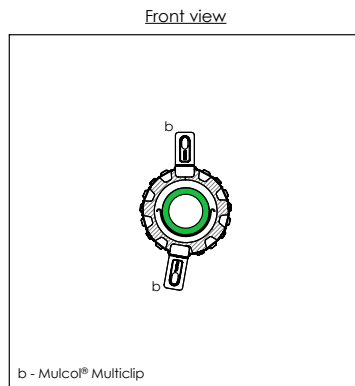


Drawing: FW.E-MC30-MLF-10.0.50

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Green-MS	$\leq \varnothing 50$	6.9	Multicollars Slim	EI 90 U/C

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.21 PP-R Multilayer at zero distance to floor

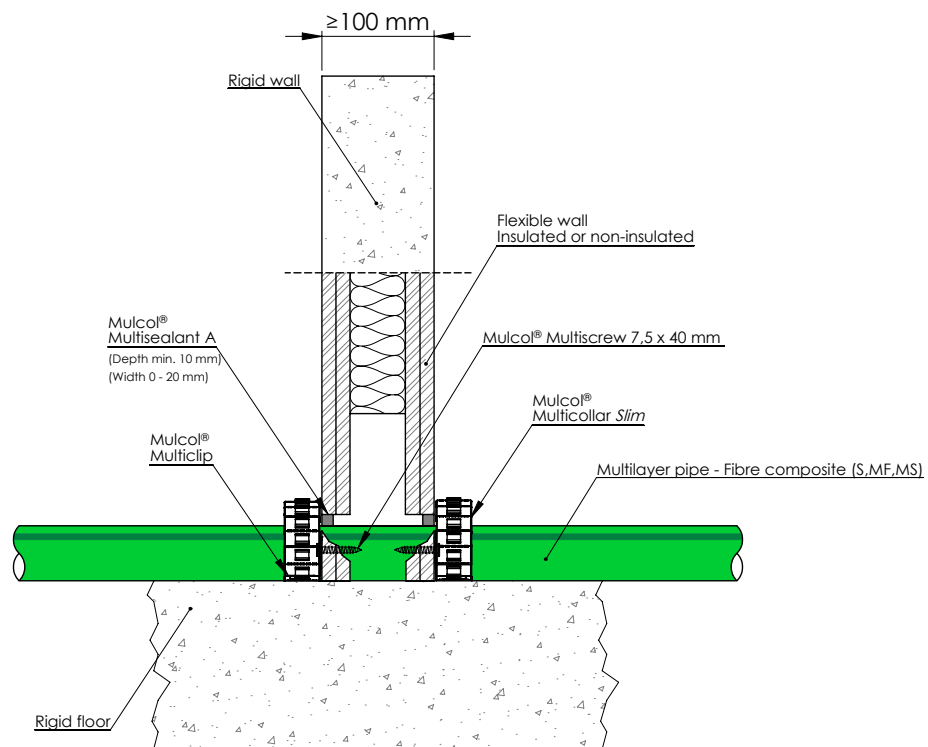
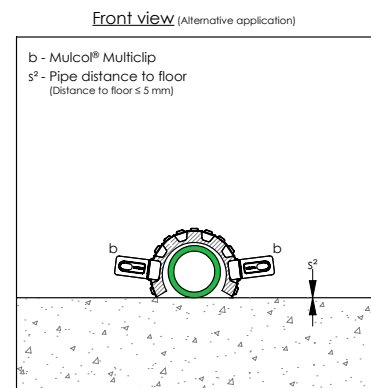
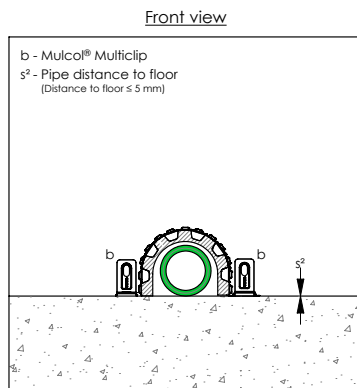


Drawing: FW.E-MC30f-MLF-10.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Green-MF	$\leq \varnothing 50$	6.9	Multicollar Slim	EI 90 U/C

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.22 PP-R Multilayer pipes at zero distance to floor - Elastomer LS 300 / CS

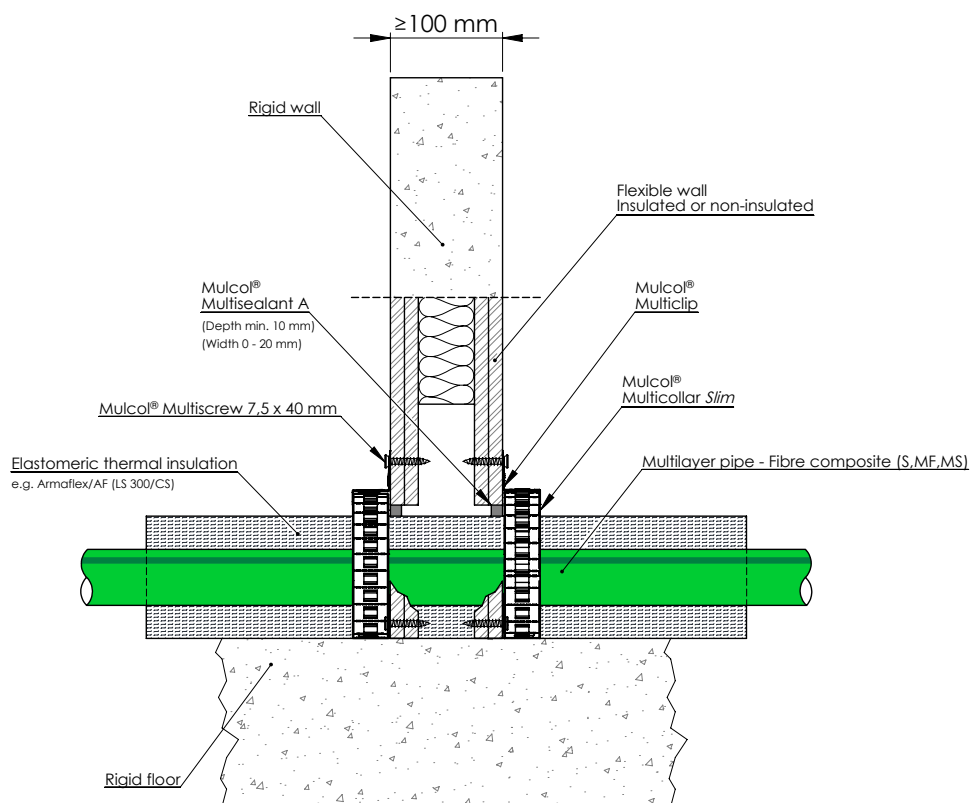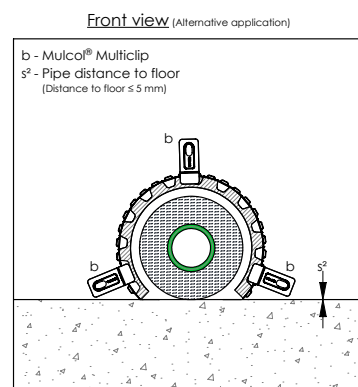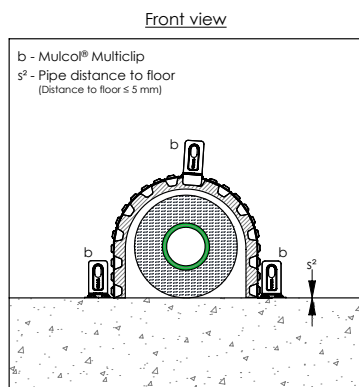



Drawing: FW.E-MC30f-MLF-10.0.22

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
Aquatherm Blue-MF	$\leq \varnothing 50$	6.9	ArmaFlex AF (min. class B _L -s3, d0 B-s3, d0)	9 - 32	LS 300 / CS	Multicollar Slim	EI 90 U/C

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.23 PE Pipe insulated PIR

Front view

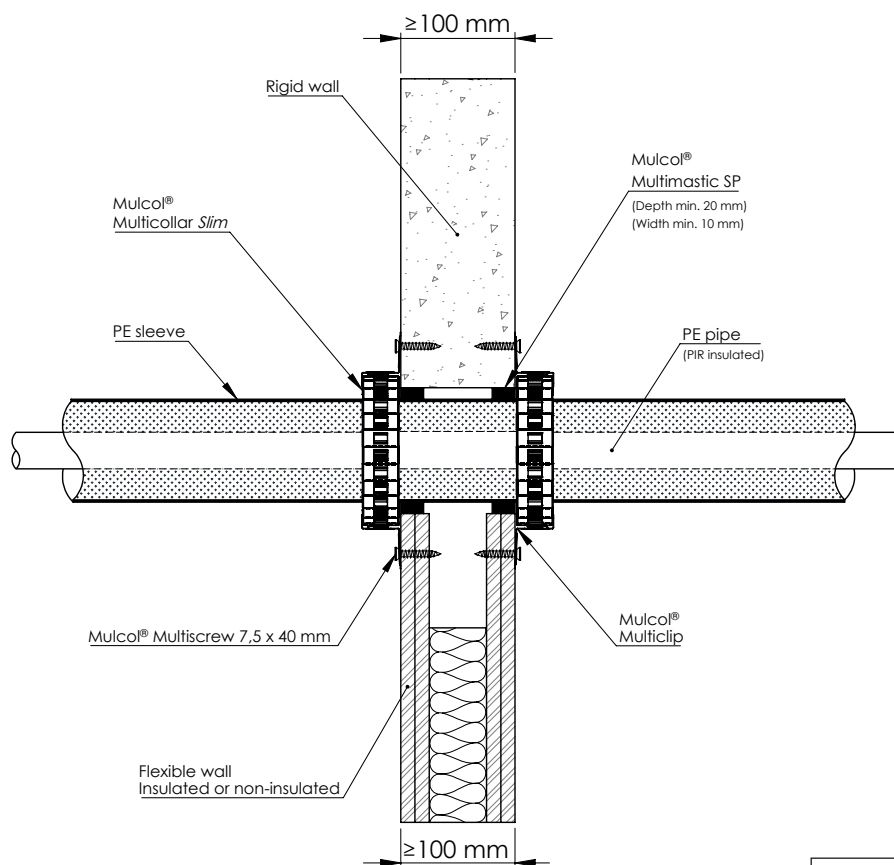
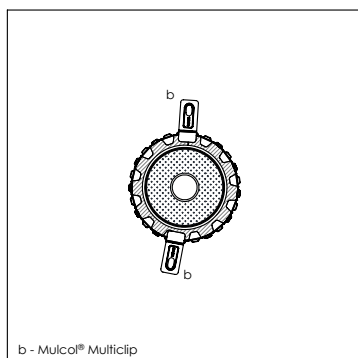


Drawing: FW-MC30-PP_pr-10.0.23

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
PE	$\leq \varnothing 50$	≥ 5.0	PIR / PUR + PE coating	20	CS	Multicollar Slim	EI 60 C/U

A.1.11 Directly through wall - ≥ 100 mm - Combustible pipes

A.1.11.24 Rubber cool-water hose


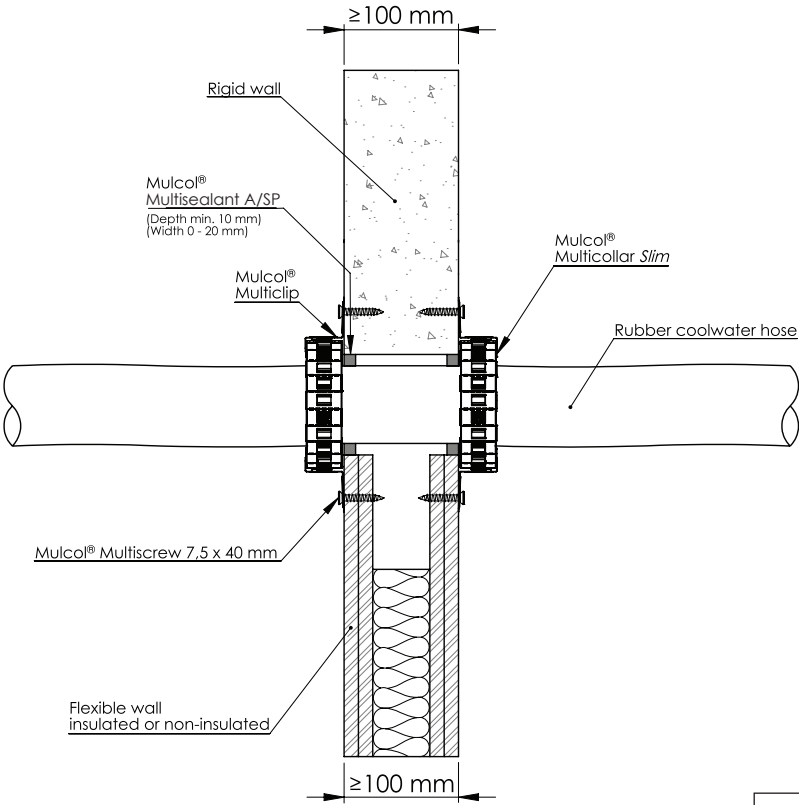
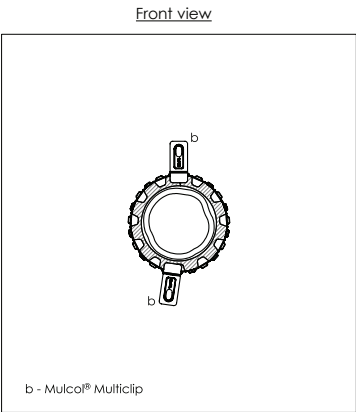


Drawing: FW-CWH-10.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Rubber cool-water hose	$\leq \varnothing 75$	6.0	Multicollar <i>Slim</i>	EI 60 U/C

A.1.12 Multimastic FB1 - 2x50 mm - Multilayer pipes (MLC)

A.1.12.1 Multilayer pipes (MLC)

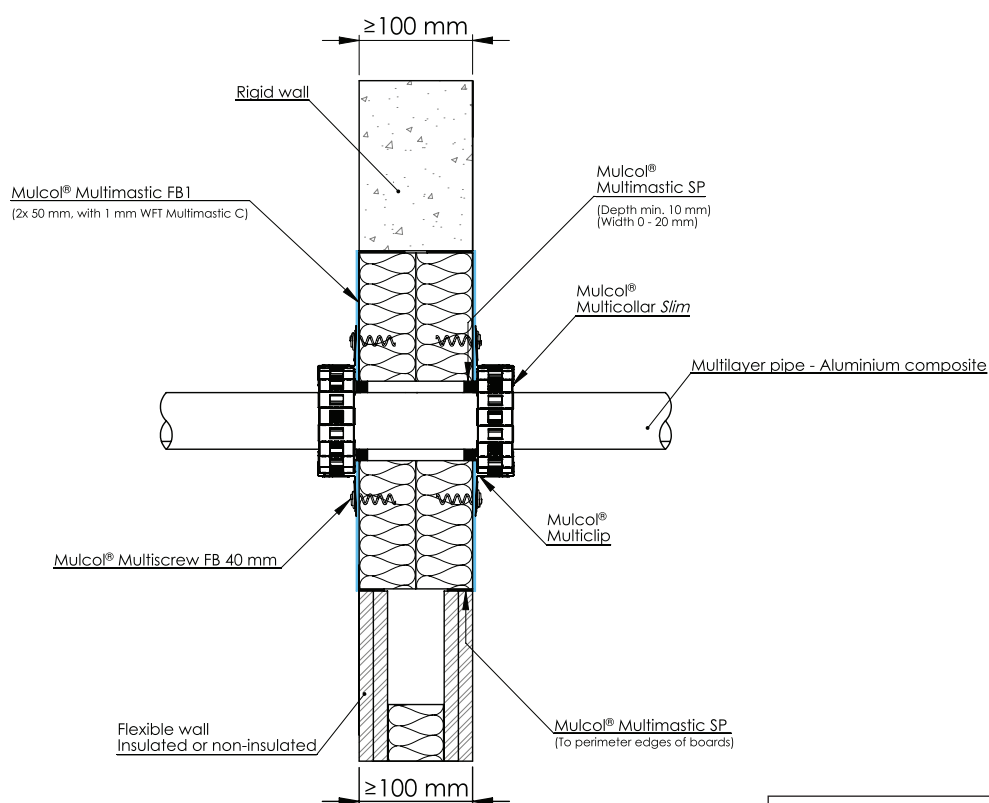

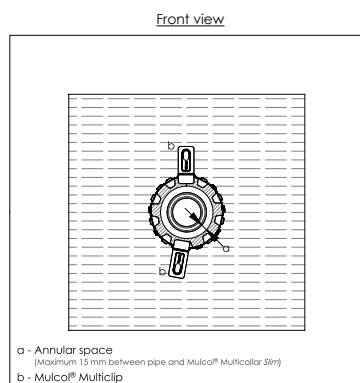


Drawing: PBfw.E-MLA-MC30-MFB1.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Multilayer pipes (MLC)	≤ Ø 20	2.0	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/C
	≤ Ø 25	3.5			
	≤ Ø 32	3.0			
	≤ Ø 40	3.5			
	≤ Ø 40	4.0			
	≤ Ø 50	4.0			
	≤ Ø 63	4.5			EI 90 U/C, E 120 U/C

A.1.12 Multimastic FB1 - 2x50 mm - Multilayer pipes (MLC)

A.1.12.2 Multilayer pipes (MLC) - double Multicollar *Slim*

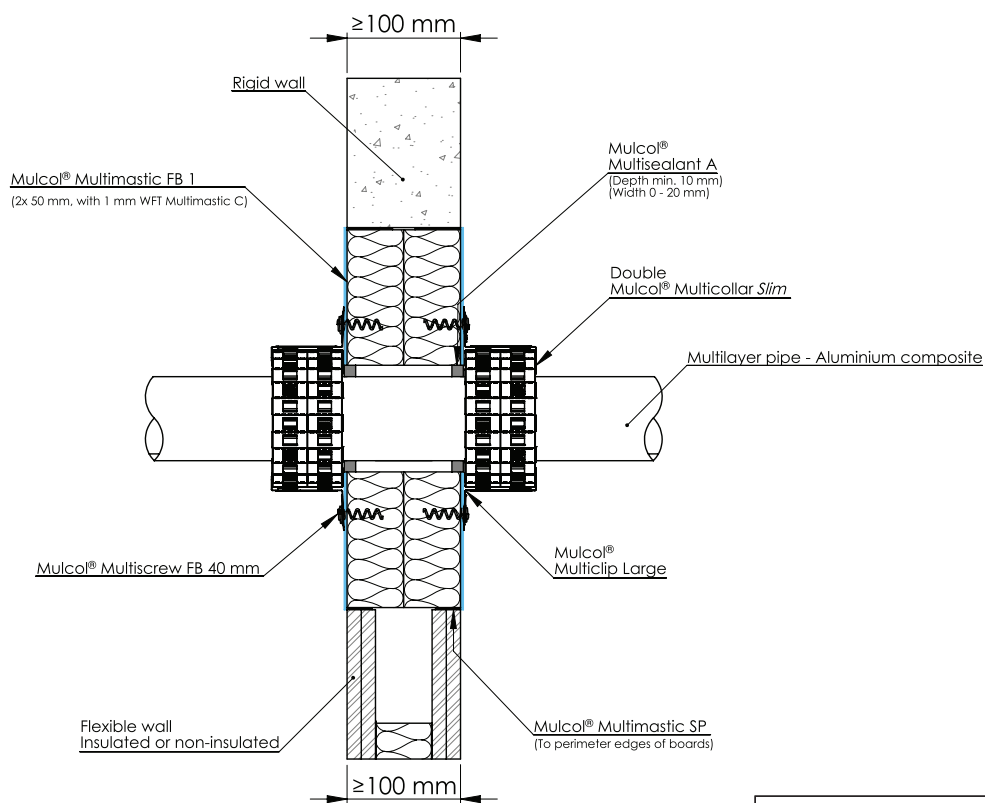

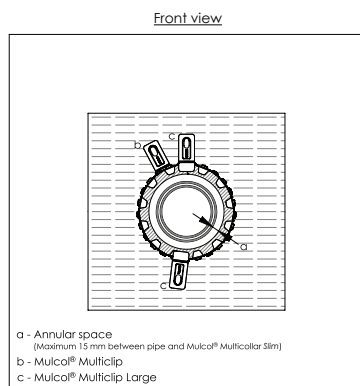


Drawing: PBfw.E-MLA-MC60-MFB1.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Multilayer pipes (MLC)	≤ Ø 75	6.0	Multicollar <i>Slim</i> Double	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 90 U/C, E 120 U/C

A.1.12 Multimastic FB1 - 2x50 mm - Multilayer pipes (MLC)

A.1.12.3 Multilayer pipes (MLC) - Elastomer LI 300 / CI

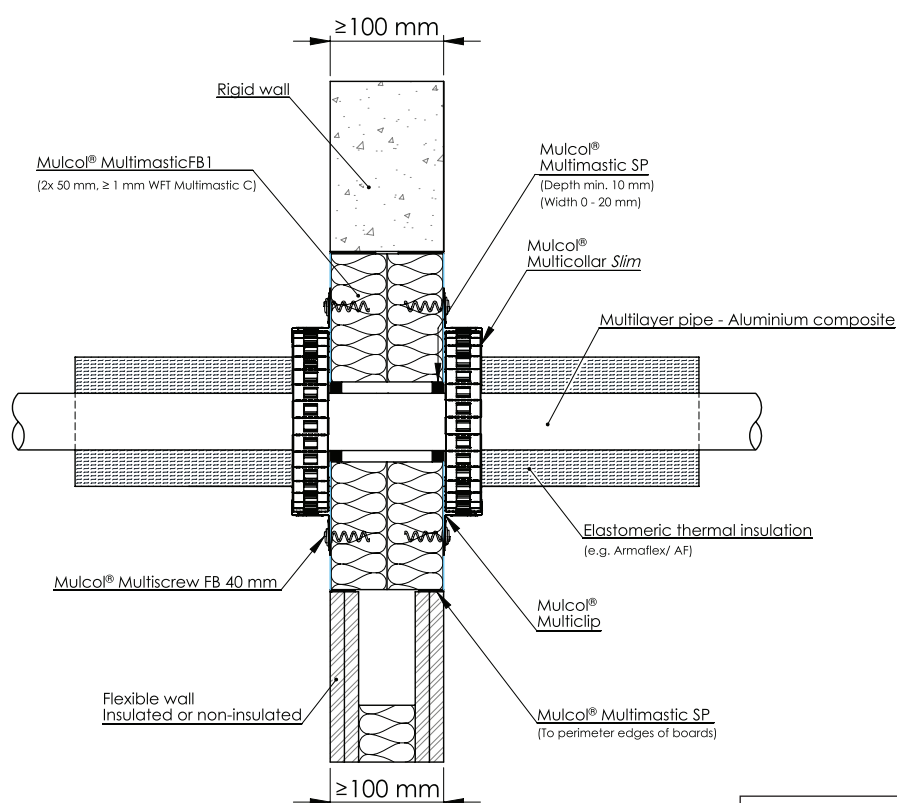

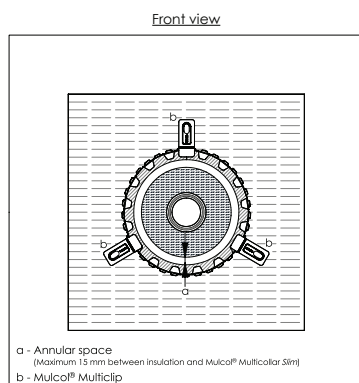


Drawing: PBfw.E-MLA-MC30-10.0.22

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration			
Multilayer pipes (MLC)	≤ Ø 50	4.0	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	9 - 32	LI 300 / CI	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/C

A.1.12 Multimastic FB1 - 2x50 mm - Multilayer pipes (MLC)

A.1.12.4 Multilayer pipes (MLC) - Phenolic foam LS 400 / CS

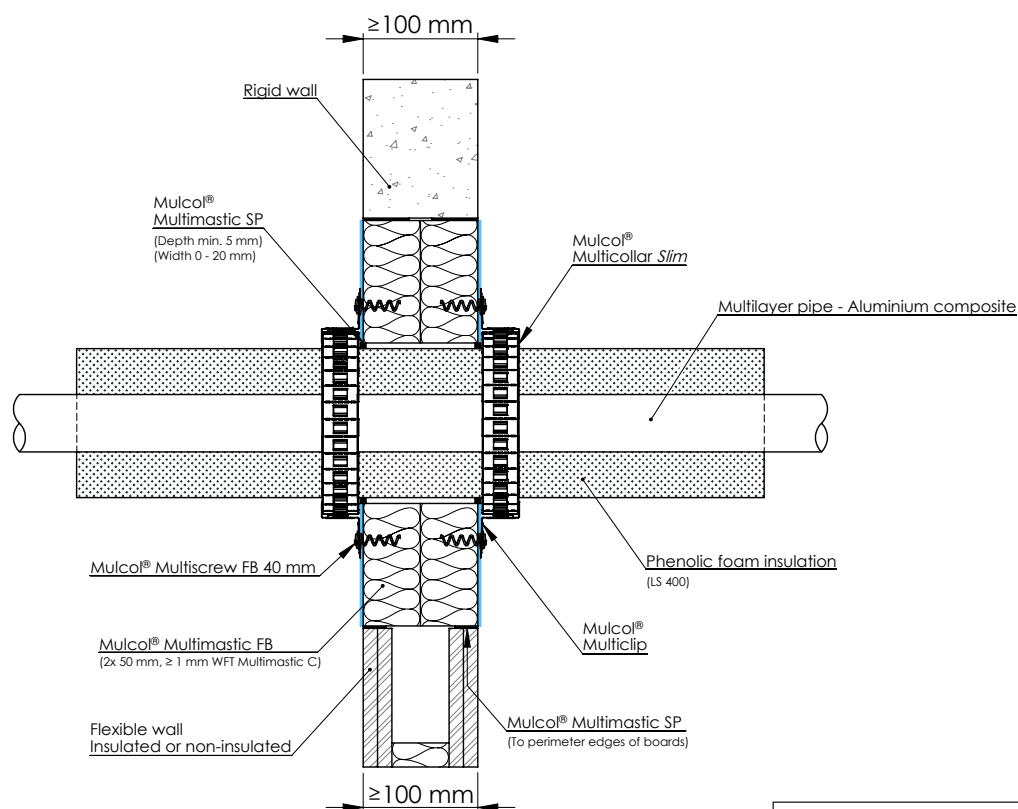

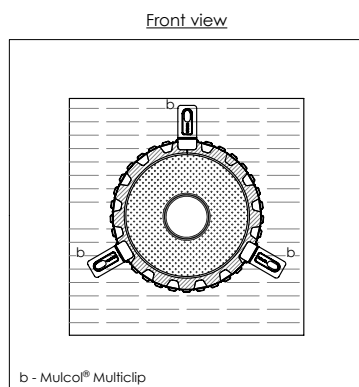


Drawing: PBfw.E-MLA-MC30-MFB1.0.22

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration			
Multilayer pipes (MLC)	≤ Ø 20	2.0	Kingspan Kooltherm	15 - 40	LS 400 / CS	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 60 U/C
	≤ Ø 40	3.5		20 - 40				
	≤ Ø 63	4.5						

A.1.12 Multimastic FB1 - 2x50 mm - Multilayer pipes (MLC)

A.1.12.5 Multiple Multilayer pipes (MLC) - PE foam

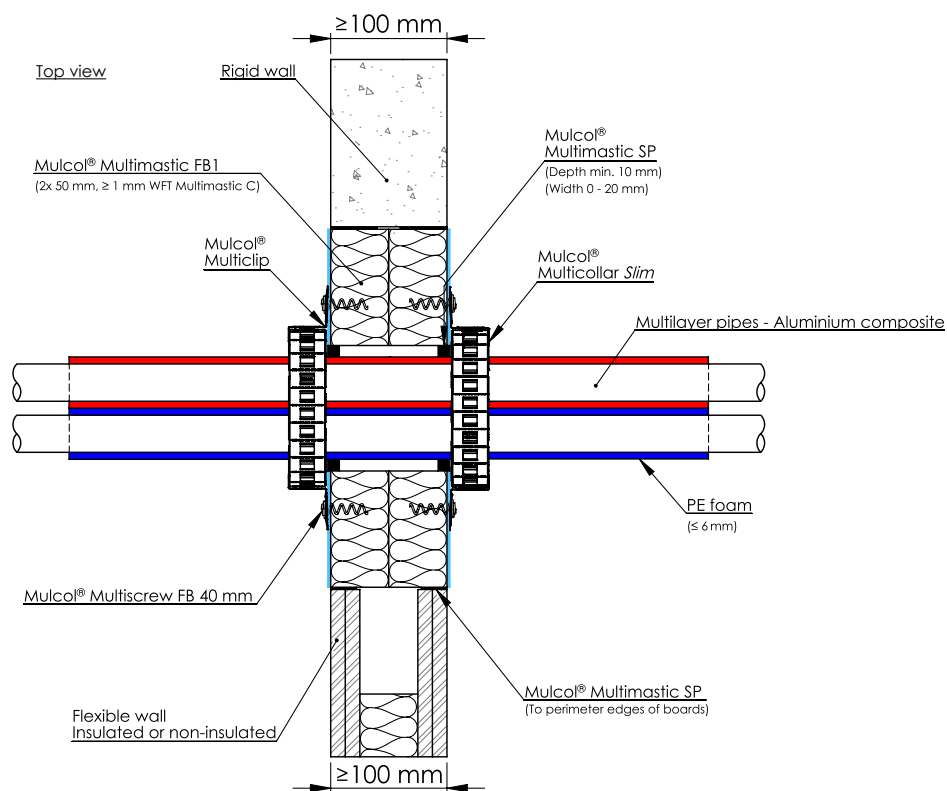
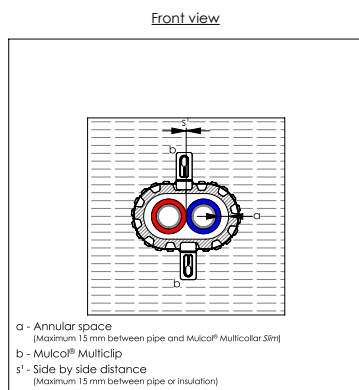


Drawing: PBfw.E-MC30-MLP2-10.0.2

Services	Pipe dimensions (mm)		Number of pipes	Insulation			Product	Sealing	Classification
	Outer dimension	Wall thickness		Type	Thickness (mm)	Configuration			
Multilayer pipes (MLC)	≤ Ø 15	2.0	≤ 12	PE foam	6	LS 400 / CS LI 400 / CI	Multicollar Slim	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 120 U/C

A.1.13 Multimortar + Multimastic FB - ≥ 100 mm - Multilayer pipes (MLC)

A.1.13.1 Multilayer pipes (MLC)

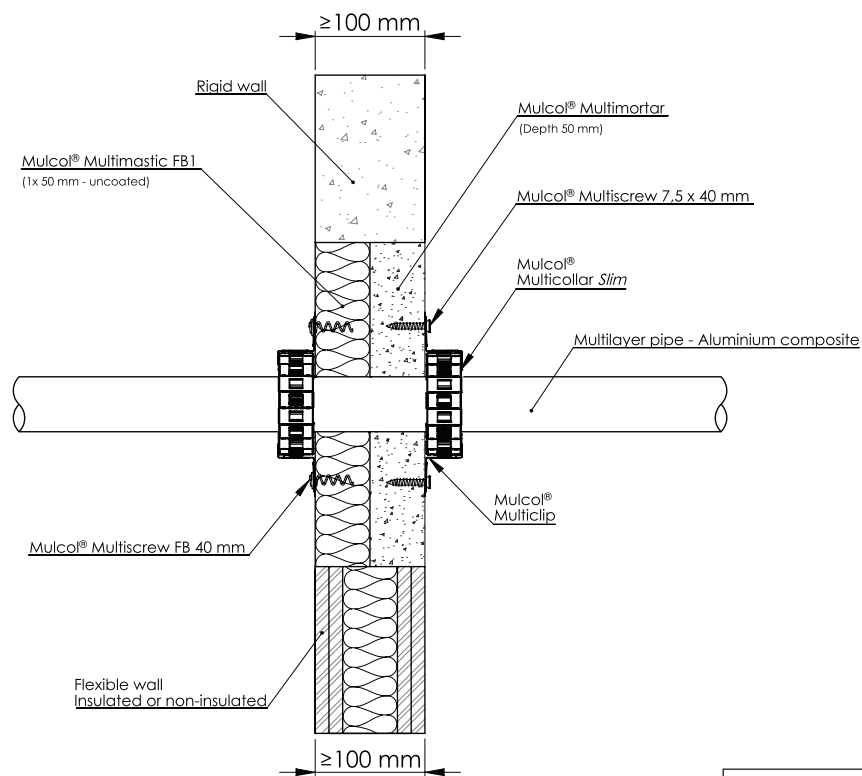
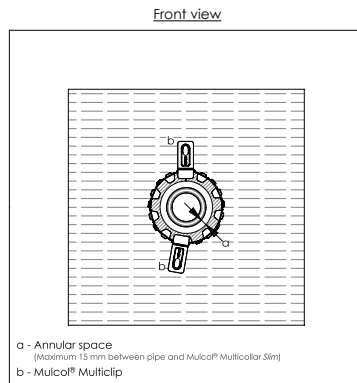


Drawing: FW.E-MLA-MM2.5.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Multilayer pipes (MLC)	$\leq \varnothing 32$	3.2	Multicollar Slim	EI 45 C/U, E 90 C/U
		3.2 - 4.0		EI 45 U/C, E 90 U/C
	$\leq \varnothing 50$	4.0		EI 60 U/C, E 120 U/C

A.1.13 Multimortar + Multimastic FB - ≥ 100 mm - Multilayer pipes (MLC)


A.1.13.2 Multilayer pipes (MLC) - double Multicollar *Slim*

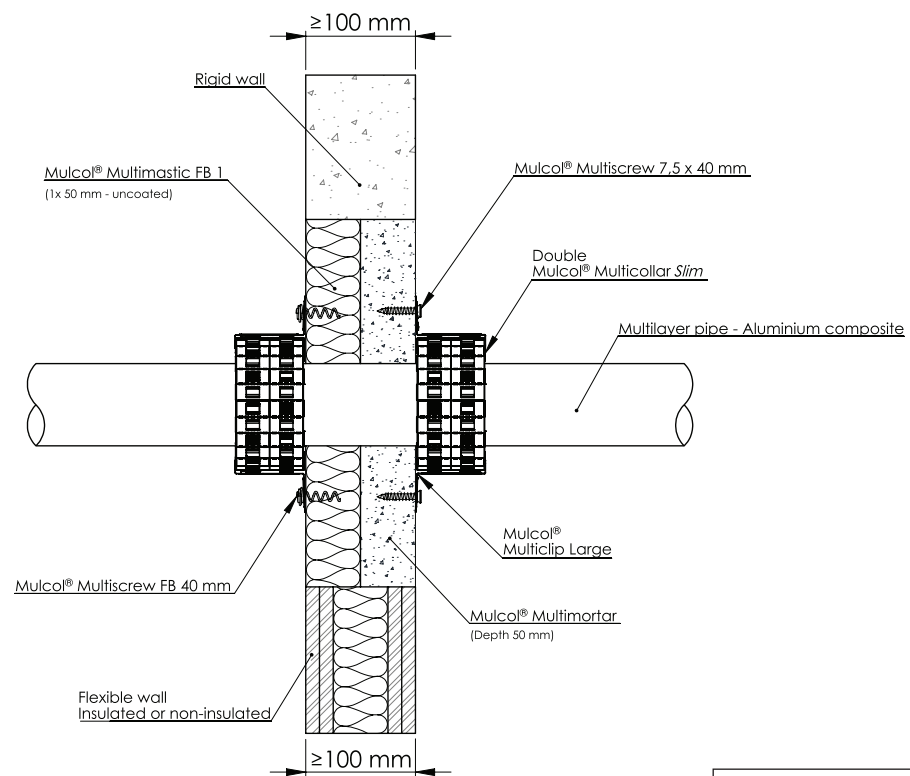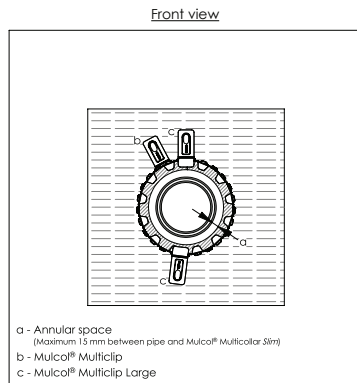

Drawing: FW.E-MLA-MM2.5.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Multilayer pipes (MLC)	$\leq \varnothing 75$	6.0	Multicollar <i>Slim</i> double	EI 90 U/C, E 120 U/C

A.1.13.3 Multilayer pipes (MLC) - Phenolic foam


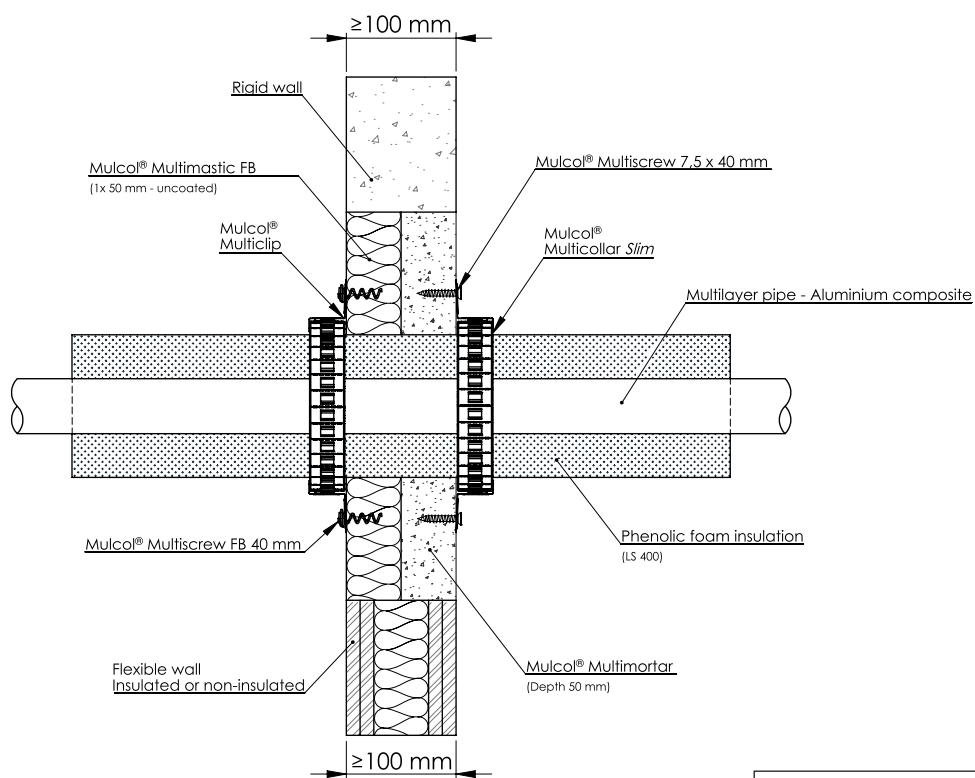


Drawing: FW.E-MLA-MM2.5.10

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	≤ Ø 20	2.0	Kingspan Kooltherm	15 - 40	LS 400 / CS	Multicollar <i>Slim</i>	EI 60 U/C
	≤ Ø 40	3.5		20 - 40			
	≤ Ø 63	4.5					

A.1.13 Multimortar + Multimastic FB - ≥ 100 mm - Multilayer pipes (MLC)

A.1.13.4 Multiple Multilayer pipes (MLC) - PE foam

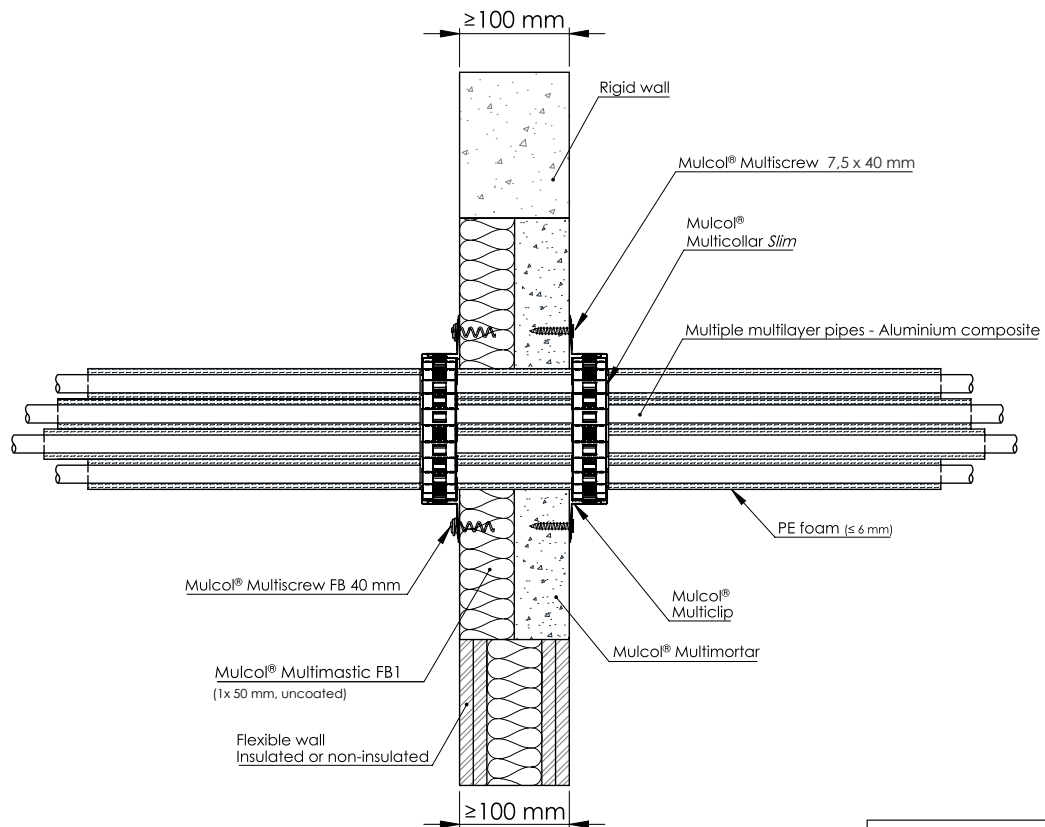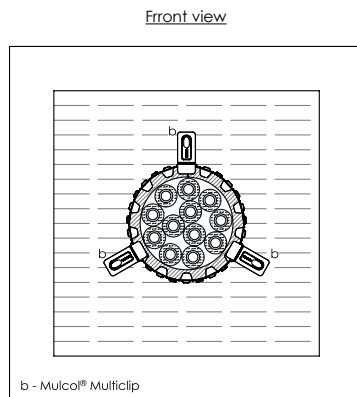

Drawing: FW.E-MC30-MLA_pr-MM2.5.40-T

Services	Pipe dimensions (mm)		No. of pipes	Insulation			Product	Classification
	Outer diameter	Wall thickness		Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 15$	2.0	≤ 12	PE foam	≤ 6	LS 400 / CS	Multicollar <i>Slim</i>	EI 30 U/C E 120 U/C
						LI 400 / CI		



A.1.14

Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm -

Multilayer pipes (MLC)

A.1.14.1

Multilayer pipes (MLC)

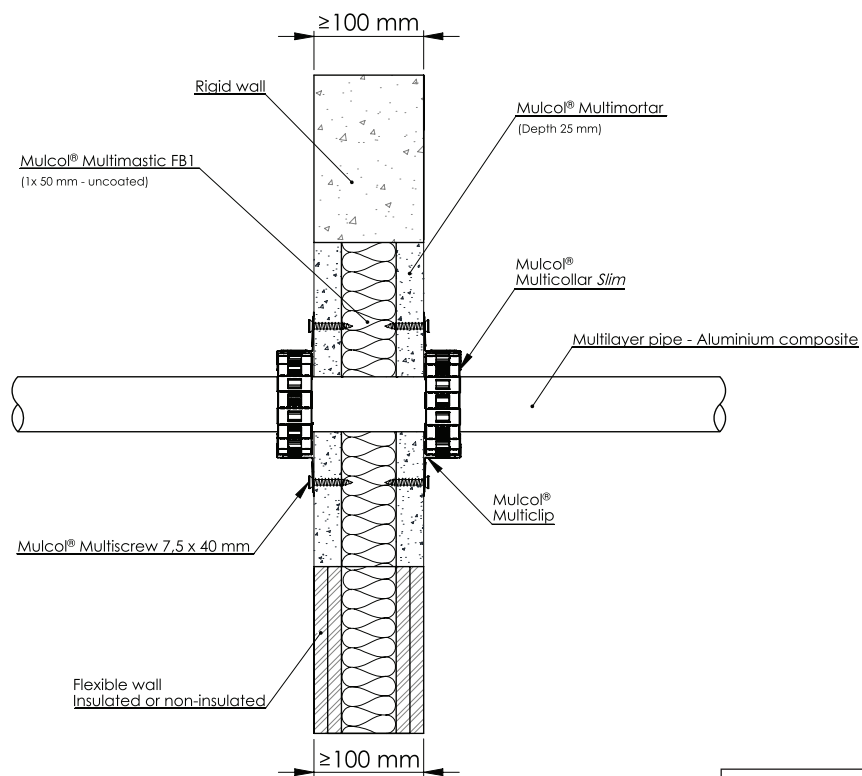
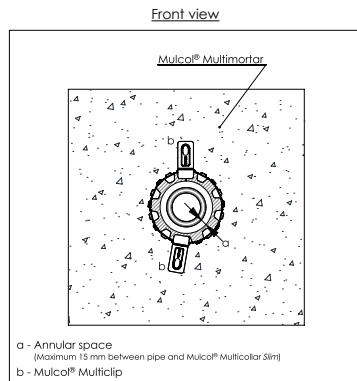


Drawing: FW-MLA-MM3.4.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Multilayer pipes (MLC)	≤ Ø 32	3.2	Multicollar Slim	EI 45 C/U, E 90 C/U
		3.2 - 4.0		EI 45 U/C, E 90 U/C
	≤ Ø 50	4.0		EI 60 U/C, E 120 U/C

A.1.14 Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm - Multilayer pipes (MLC)



A.1.14.2 Multilayer pipes (MLC) - double Multicollar *Slim*

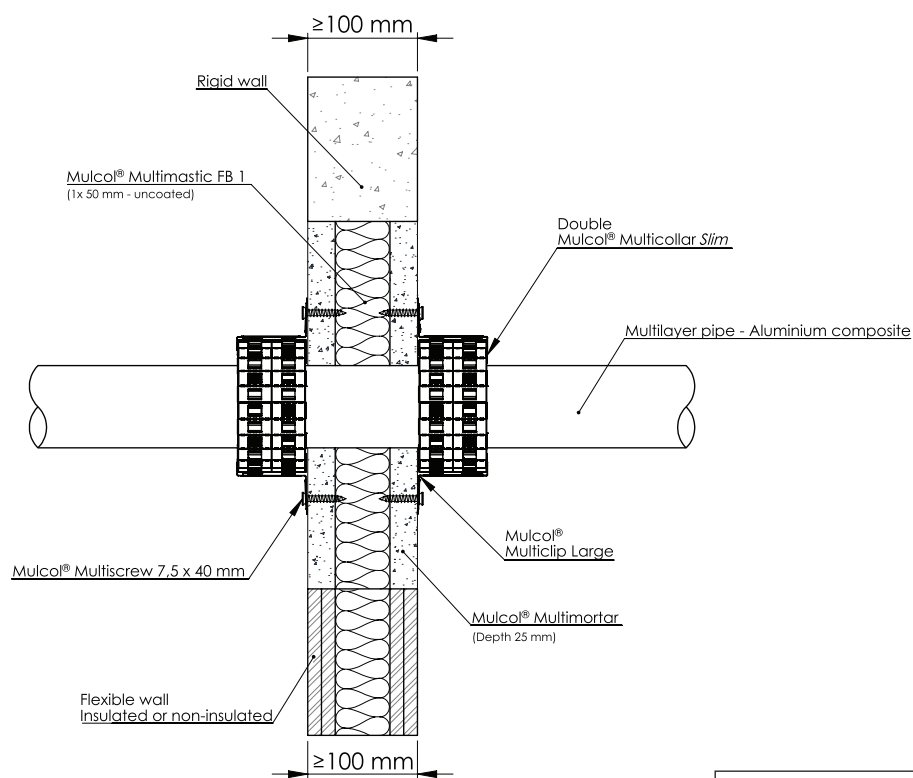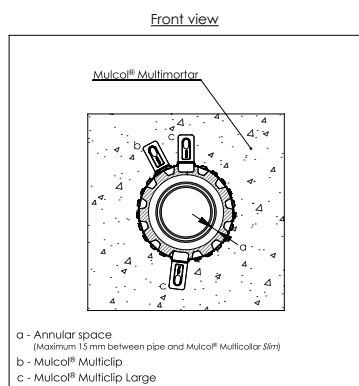

Drawing: FW-MLA-MM3.4.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Multilayer pipes (MLC)	$\leq \varnothing 75$	6.0	Multicollar <i>Slim</i> double	EI 90 U/C, E 120 U/C

A.1.14 Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm - Multilayer pipes (MLC)
A.1.14.3 Multilayer pipes (MLC) - Phenolic foam

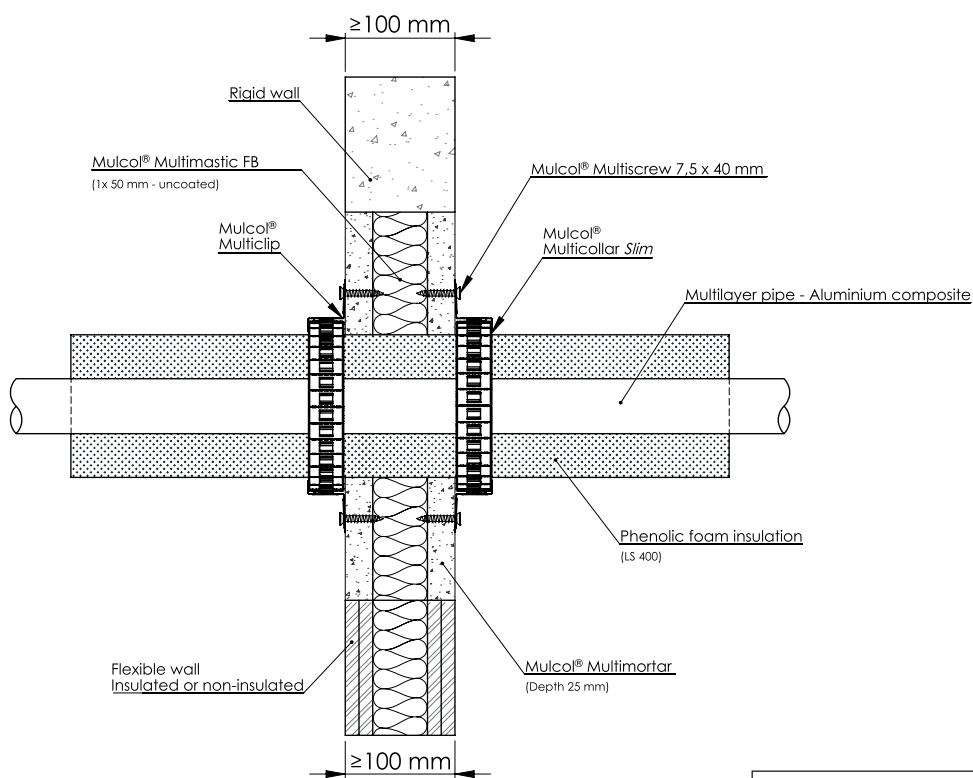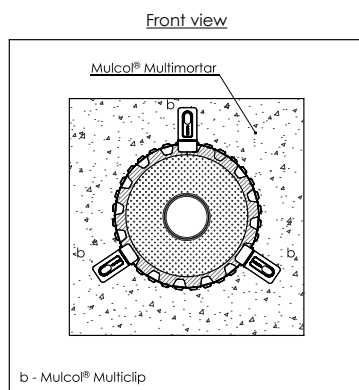



Drawing: FW.E-MLA-MM2.5.10

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 20$	2.0	Kingspan Kooltherm	15 - 40	LS 400 / CS	Multicollar <i>Slim</i>	EI 60 U/C
	$\leq \varnothing 40$	3.5		20 - 40			
	$\leq \varnothing 63$	4.5					

A.1.14 Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm - Multilayer pipes (MLC)

A.1.14.4 Multiple Multilayer pipes (MLC) - PE foam

Front view

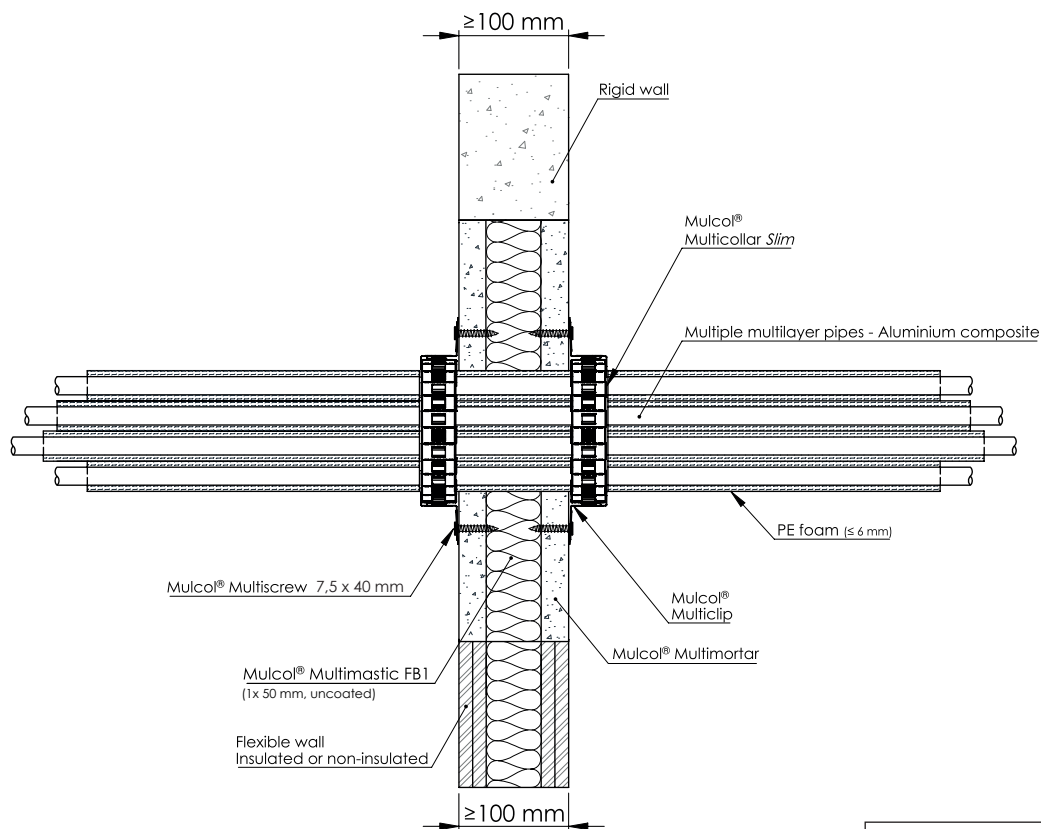
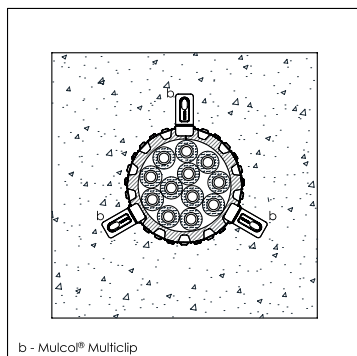


Drawing: FW-E-MC30-MLA_pr-MM3.4.40-T

Services	Pipe dimensions (mm)		No. of pipes	Insulation			Product	Classification
	Outer diameter	Wall thickness		Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 15$	2.0	≤ 12	PE foam	≤ 6	LS 400 / CS	Multicollar <i>Slim</i>	EI 30 U/C E 120 U/C
						LI 400 / CI		

A.1.15 Multimortar - ≥ 100 mm - Multilayer pipes (MLC)

A.1.15.1 Multilayer pipes (MLC)

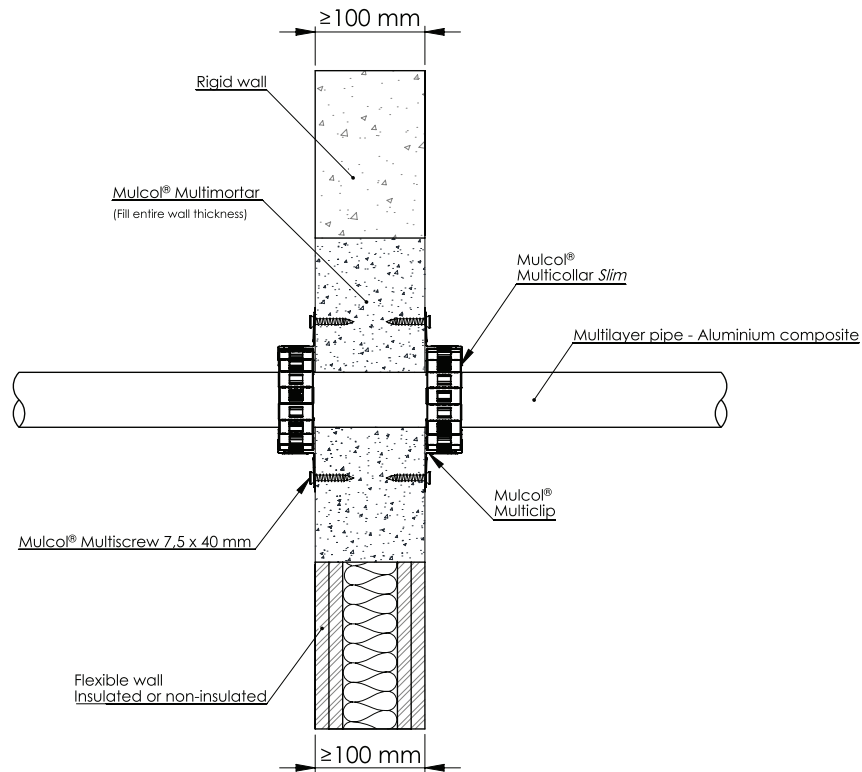
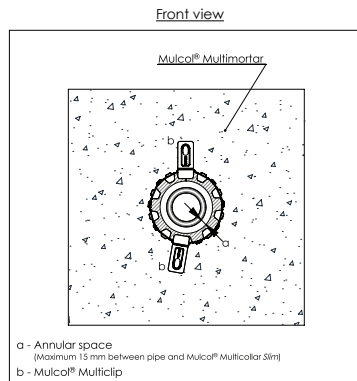


FW.E-MLA-MM2.5.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Multilayer pipes (MLC)	$\leq \varnothing 20$	2.0	Multicollar Slim	EI 120 U/C
	$\leq \varnothing 25$	3.5		
	$\leq \varnothing 32$	3.0		EI 45 C/U, E 90 C/U
		3.2		
		3.2 - 4.0		EI 45 U/C, E 90 U/C
	$\leq \varnothing 40$	3.5		EI 120 U/C
	$\leq \varnothing 50$	4.0		
	$\leq \varnothing 63$	4.5		EI 60 U/C, E 90 U/C
	$\leq \varnothing 75$	6.0		

A.1.15 Multimortar - ≥ 100 mm - Multilayer pipes (MLC)

A.1.15.2 Multilayer pipes (MLC) - double Multicollar *Slim*

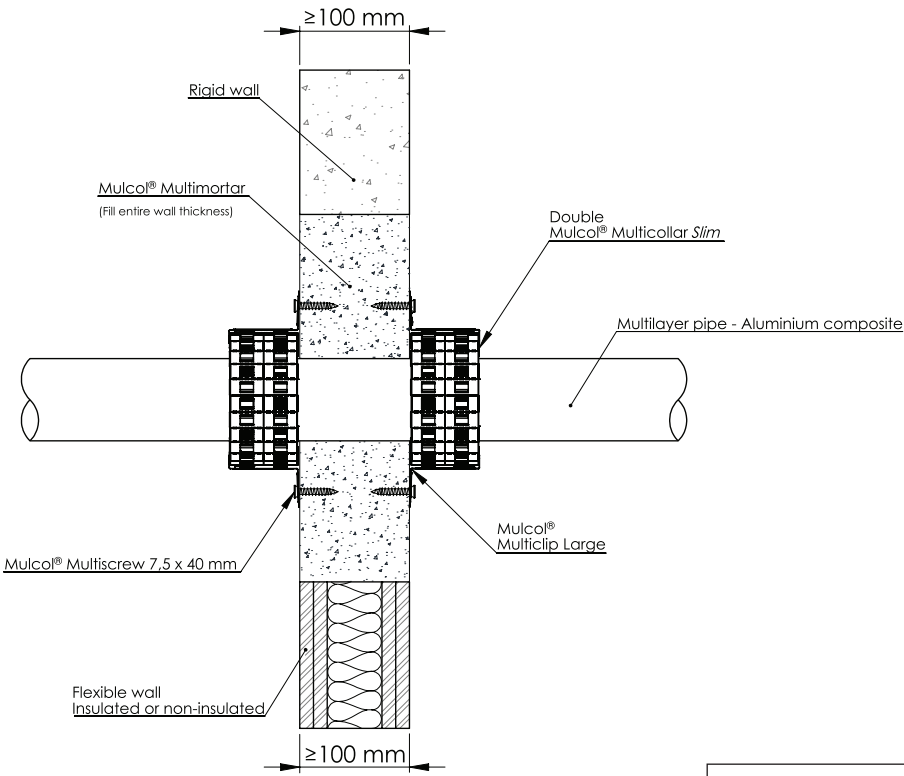
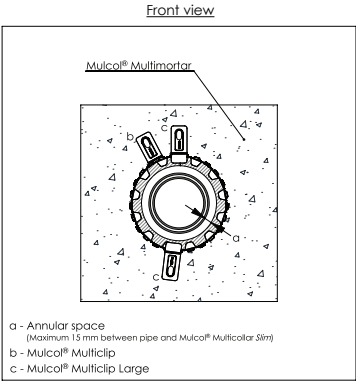


Drawing: FW.E-MLA-MM1.2.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Multilayer pipes (MLC)	$\leq \varnothing 75$	6.0	Multicollar <i>Slim</i> double	EI 90 U/C, E 120 U/C

A.1.15 Multimortar - ≥ 100 mm - Multilayer pipes (MLC)

A.1.15.3 Multilayer pipes (MLC) - Phenolic foam

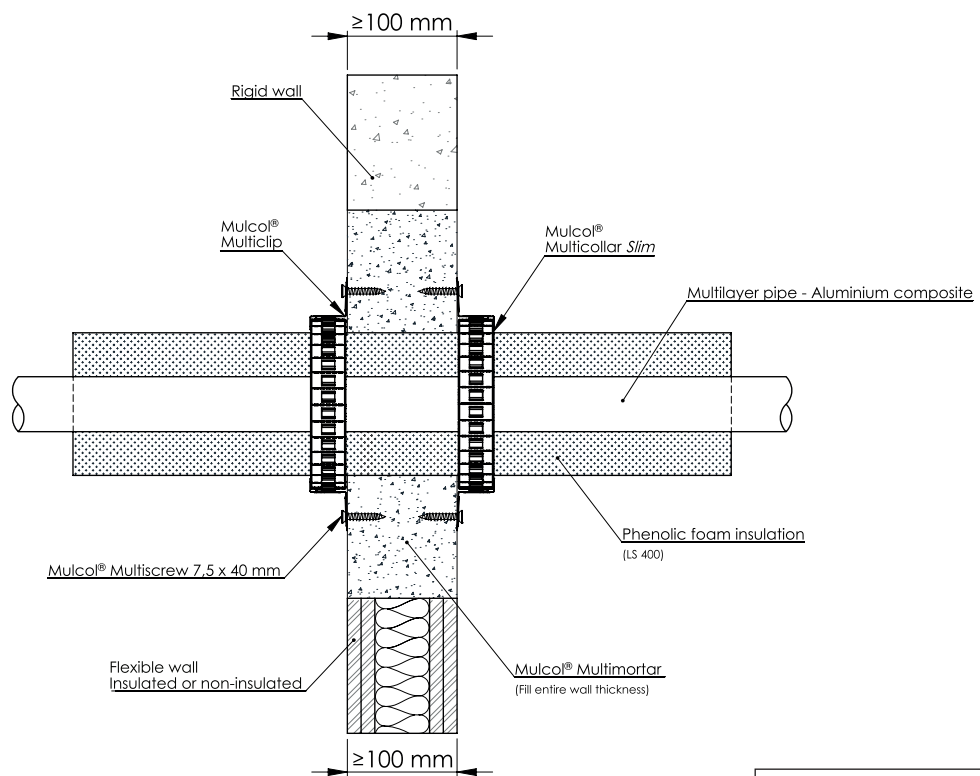
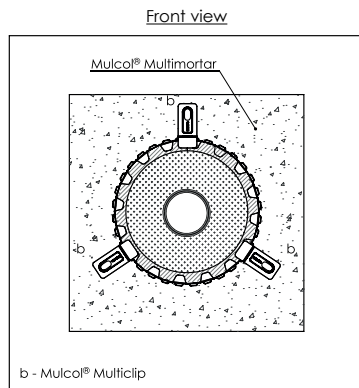


Drawing: FW-MC30-MLA-MM1.2.22

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 20$	2.0	Kingspan Kooltherm	15 - 40	LS 400 / CS	Multicollar <i>Slim</i>	EI 60 U/C
	$\leq \varnothing 40$	3.5		20 - 40			
	$\leq \varnothing 63$	4.5					

A.1.15 Multimortar - ≥ 100 mm - Multilayer pipes (MLC)

A.1.15.4 Multiple Multilayer pipes (MLC) - PE foam

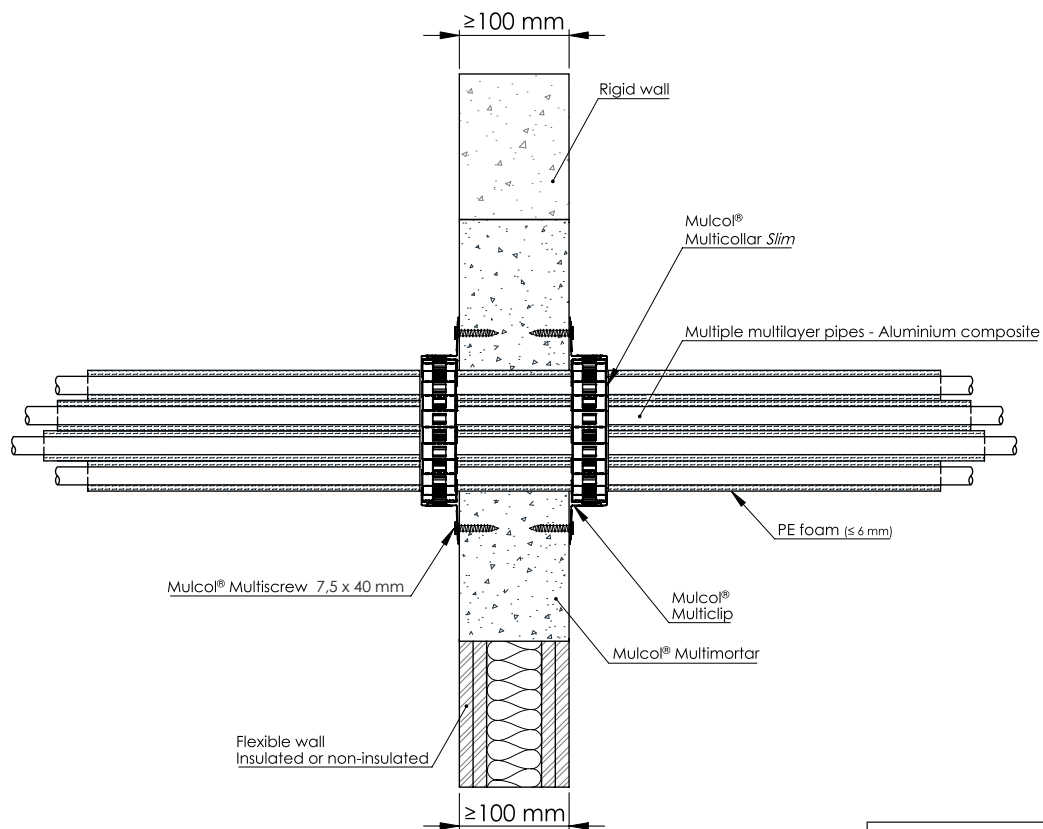
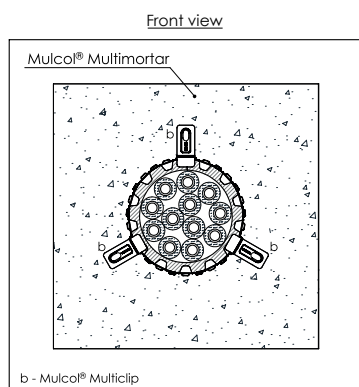


Drawing: FW-MC30-MLA_pr-MM1.2.40-T

Services	Pipe dimensions (mm)		No. of pipes	Insulation			Product	Classification
	Outer diameter	Wall thickness		Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 15$	2.0	≤ 12	PE foam	≤ 6	LS 400 / CS LI 400 / CI	Multicollar <i>Slim</i>	EI 30 U/C E 120 U/C

A.1.16 Directly through wall - ≥ 100 mm - Multilayer pipes (MLC)



A.1.16.1 Multilayer pipes (MLC)

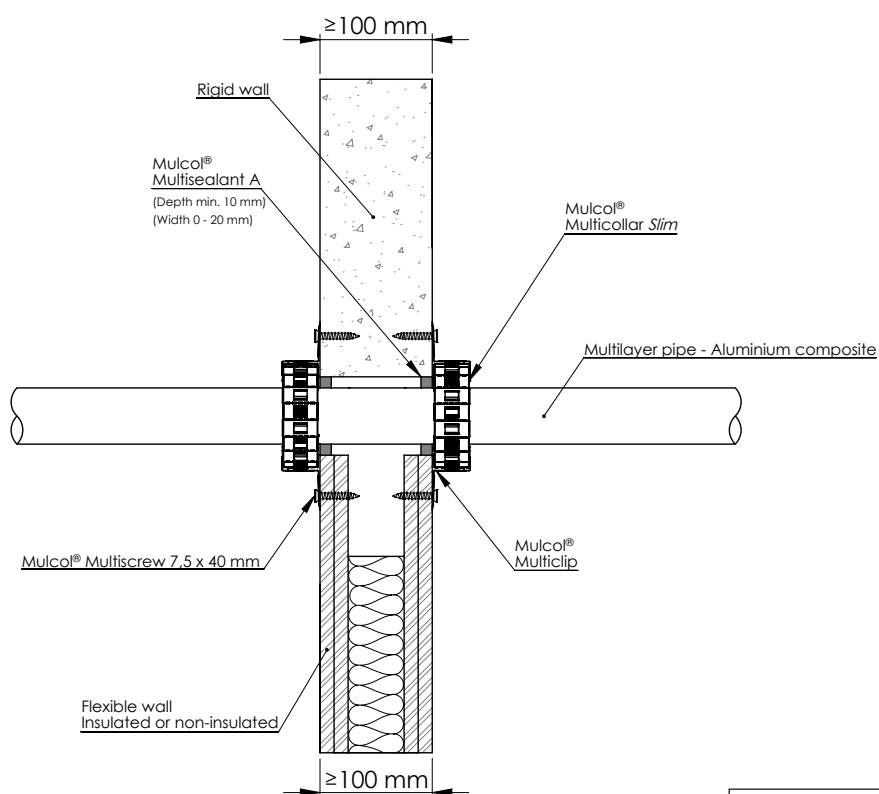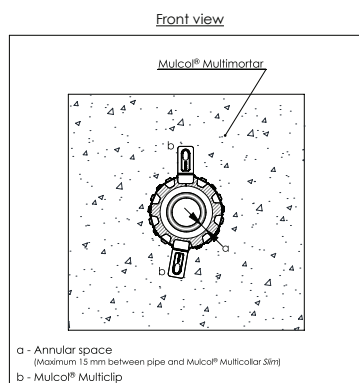

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Multilayer pipes (MLC)	$\leq \varnothing 20$	2.0	Multicollar Slim	EI 120 U/C
	$\leq \varnothing 25$	3.5		
	$\leq \varnothing 32$	3.0		
	$\leq \varnothing 40$	3.5		
		4.0		
	$\leq \varnothing 50$	4.5		
	$\leq \varnothing 63$	4.5		
	$\leq \varnothing 75$	6.0		EI 60 U/C, E 90 U/C

A.1.16 Directly through wall - ≥ 100 mm - Multilayer pipes (MLC)

A.1.16.2 Multilayer pipes (MLC) - double Multicollar *Slim*

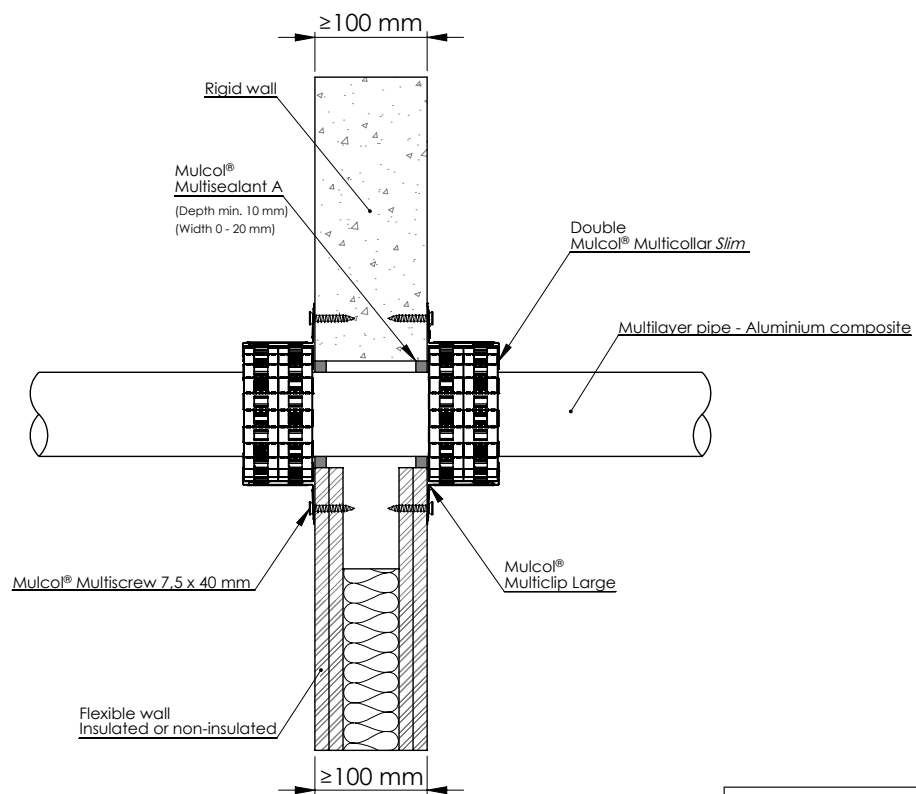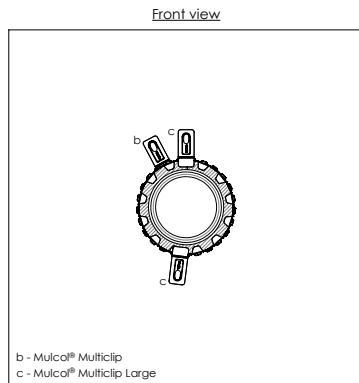



Drawing: FW.E-MC60-MLA-20.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Multilayer pipes (MLC)	$\leq \varnothing 75$	6.0	Multicollar <i>Slim</i> double	EI 90 U/C, E 120 U/C

A.1.16 Directly through wall - ≥ 100 mm - Multilayer pipes (MLC)

A.1.16.3 Multilayer pipes (MLC) - PE conduit LS 50 / CS

Front view

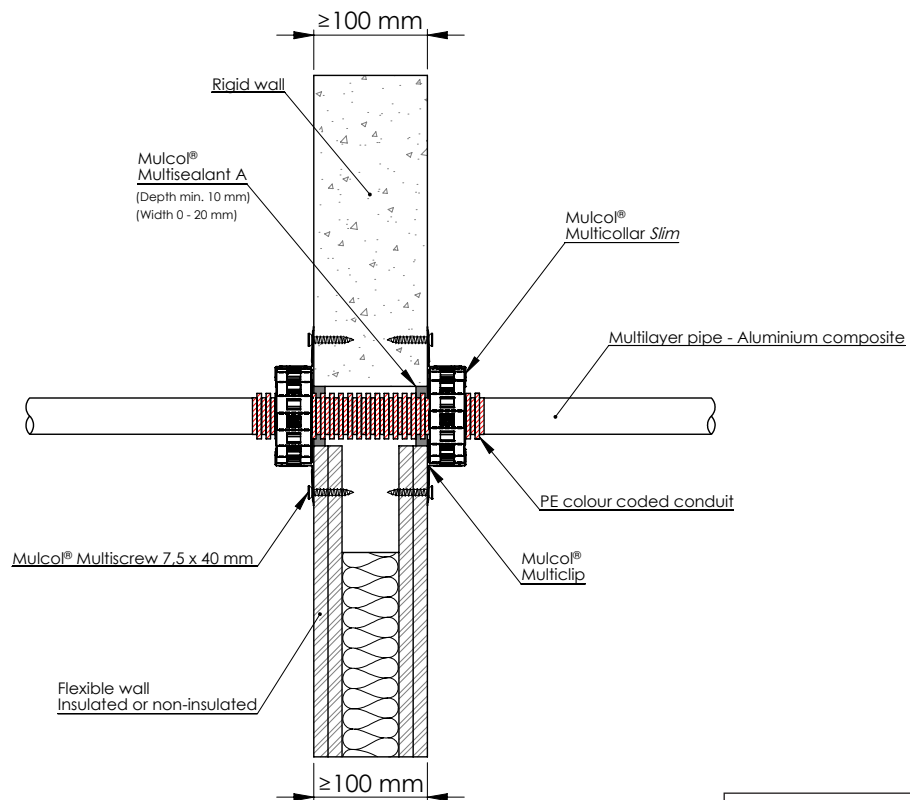
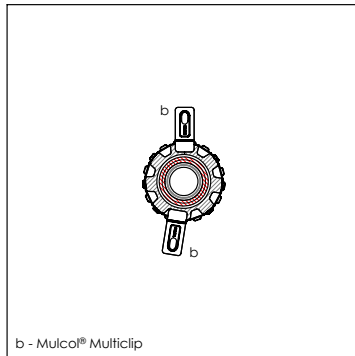


Drawing: FW.E-MC30-MLA-10.0.30

Services	Pipe dimensions (mm)		Conduit			Product	Classification
	Outer dimensions	Wall thickness	Type	Outer dimension (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 32$	3.0	PE-conduit ribbed	40	LS 50 / CS	Multicollar Slim	EI 90 U/C

A.1.16 Directly through wall - ≥ 100 mm - Multilayer pipes (MLC)

A.1.16.4 Multilayer pipes (MLC) - PE conduit LS-LI 300 / CS-CI

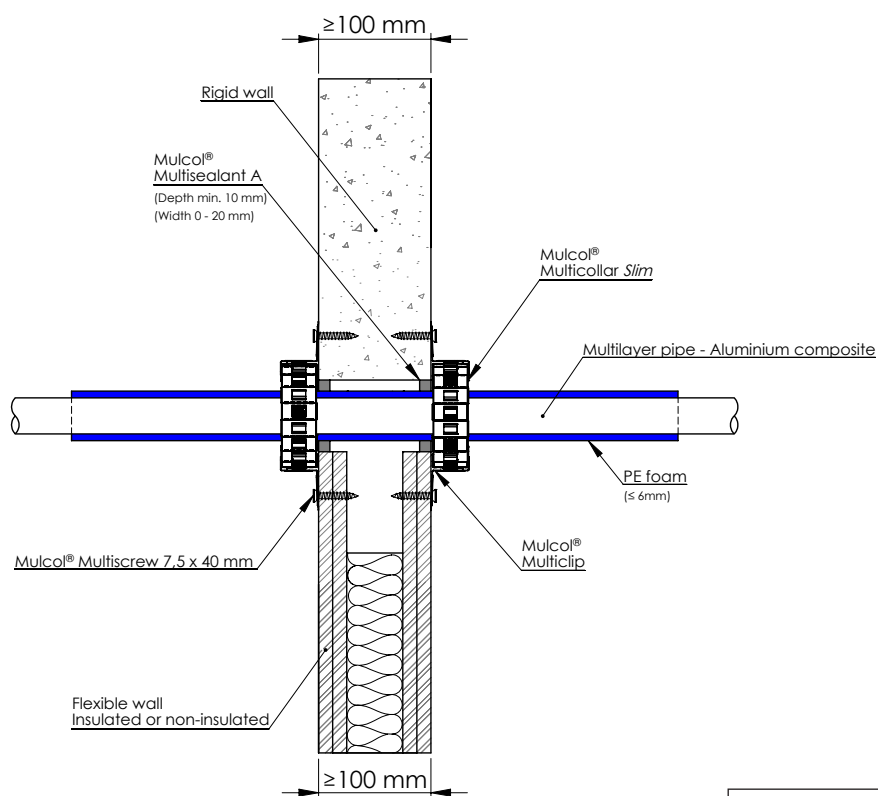
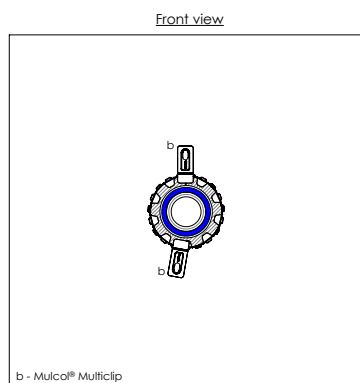


Drawing: FW.E-MC30-MLA_pr-10.0.25

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 20$	2.0	PE Foam	6	LS 300 / CS LI 300 / CI	Multicollar <i>Slim</i>	EI 120 U/C
	$\leq \varnothing 26$						
	$\leq \varnothing 32$	3.0					

A.1.16 Directly through wall - ≥ 100 mm - Multilayer pipes (MLC)

A.1.16.5 Multilayer pipes (MLC) - Elastomer LS-LI 500 / CS-CI


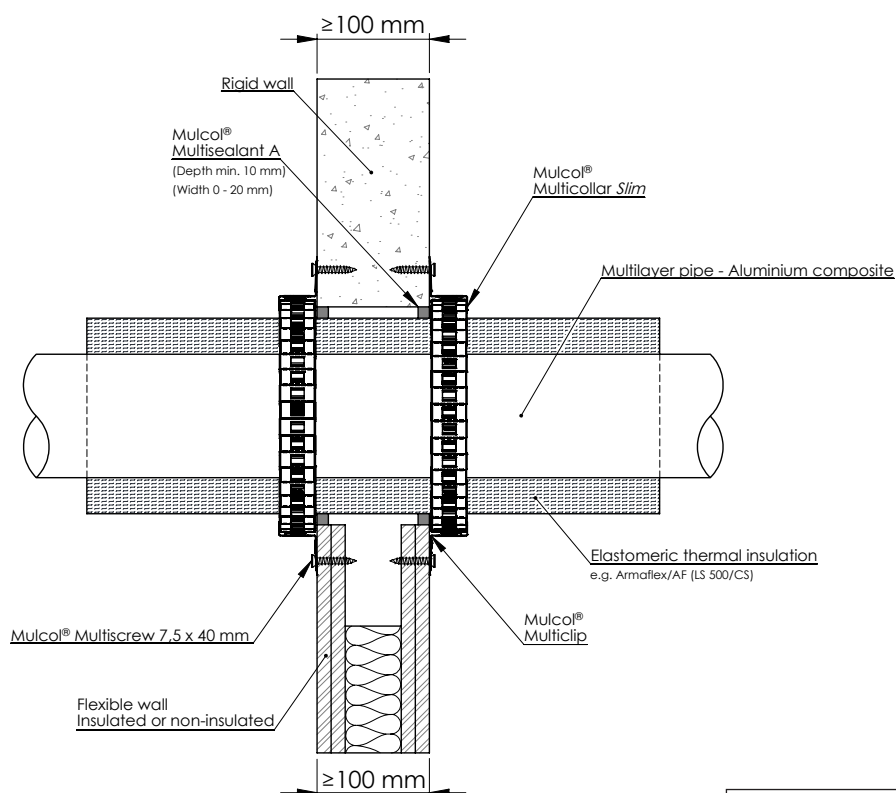
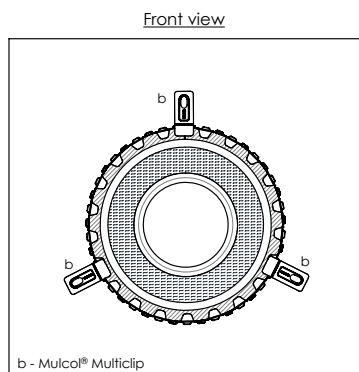


Drawing: FW.E-MC30-MLA-10.0.22.LS

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration			
Multilayer pipes (MLC)	≤ Ø 20	3.0 - 4.0	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	9 - 32	LS 500 / CS LI 500 / CI	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/C
	≤ Ø 32	3.0						EI 120 U/C
	≤ Ø 40	3.5 - 4.0						EI 120 U/C
	≤ Ø 50	4.0						EI 120 U/C
	≤ Ø 63	4.5		EI 90 U/C E 120 U/C				
	≤ Ø 75	4.7 - 6.0		EI 120 U/C				
	≤ Ø 75	6.0 - 7.5		EI 90 U/C				
	≤ Ø 90	7.0		EI 120 U/C				
	≤ Ø 110	10.0		EI 90 U/C				

A.1.16 Directly through wall - ≥ 100 mm - Multilayer pipes (MLC)

A.1.16.6 Multilayer pipes (MLC) at zero distance to floor

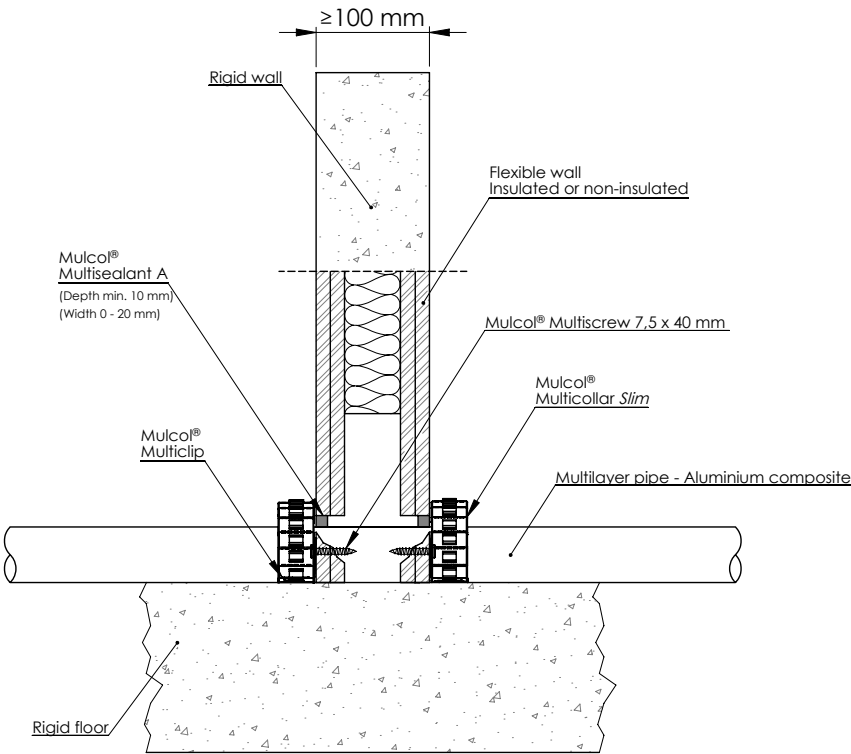
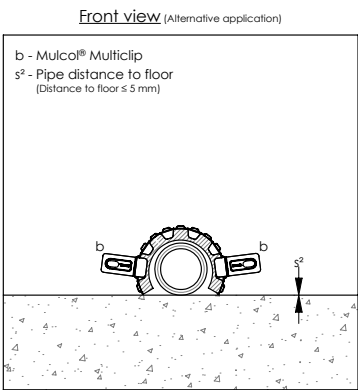
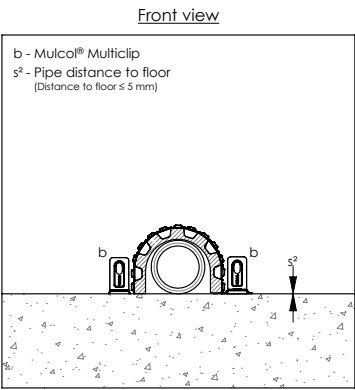


Drawing: FW.E-MC30f-MLA-10.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Multilayer pipes (MLC)	≤ Ø 32	3.0	Multicollar <i>Slim</i>	EI 90 U/C

A.1.16 Directly through wall - ≥ 100 mm - Multilayer pipes (MLC)

A.1.16.7 Multilayer pipes (MLC) at zero distance to floor - Elastomer LS-LI 300 / CS-CI

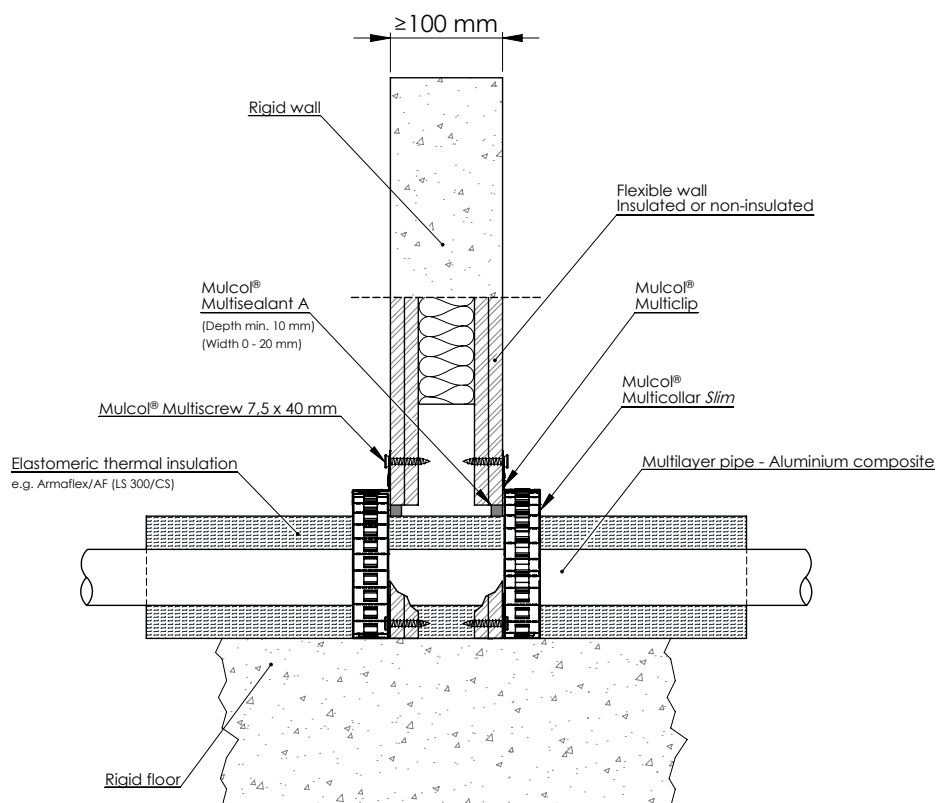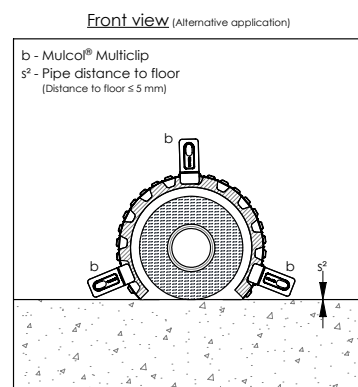
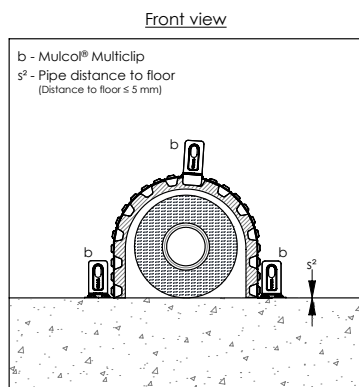


Drawing: FW.E-MC30f-MLA-10.0.22

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 32$	3.0	ArmaFlex AF (min. class B _L -s3, d0 B-s3, d0)	9 - 32	LS 300 / CS LI 300 / CI	Multicollar Slim	EI 90 U/C
	$\leq \varnothing 50$	4.0					

A.1.16 Directly through wall - ≥ 100 mm - Multilayer pipes (MLC)

A.1.16.8 Multiple Multilayer pipes (MLC) - PE Foam LS-LI 300 / CS-CI


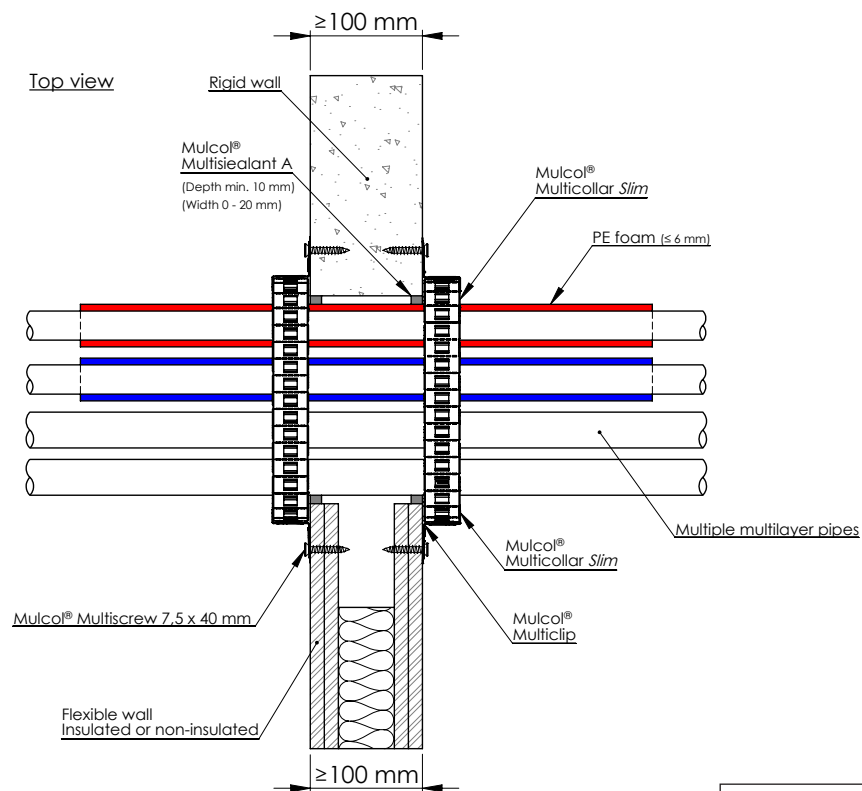
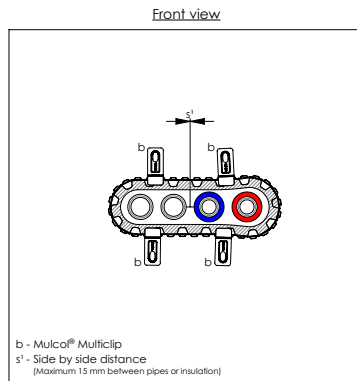


Drawing: FW.E-MC30-MLP4-10.0.40

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	≤ Ø 26	3.0	PE Foam	6	LS 300 / CS LI 300 / CI	Multicollor Slim	EI 120 U/C
	≤ Ø 32	4.0	-	-	-		

A.1.16 Directly through wall - ≥ 100 mm - Multilayer pipes (MLC)

A.1.16.9 Multiple Multilayer pipes (MLC) at zero distance to floor - Elastomer LS-LI 300 / CS-CI

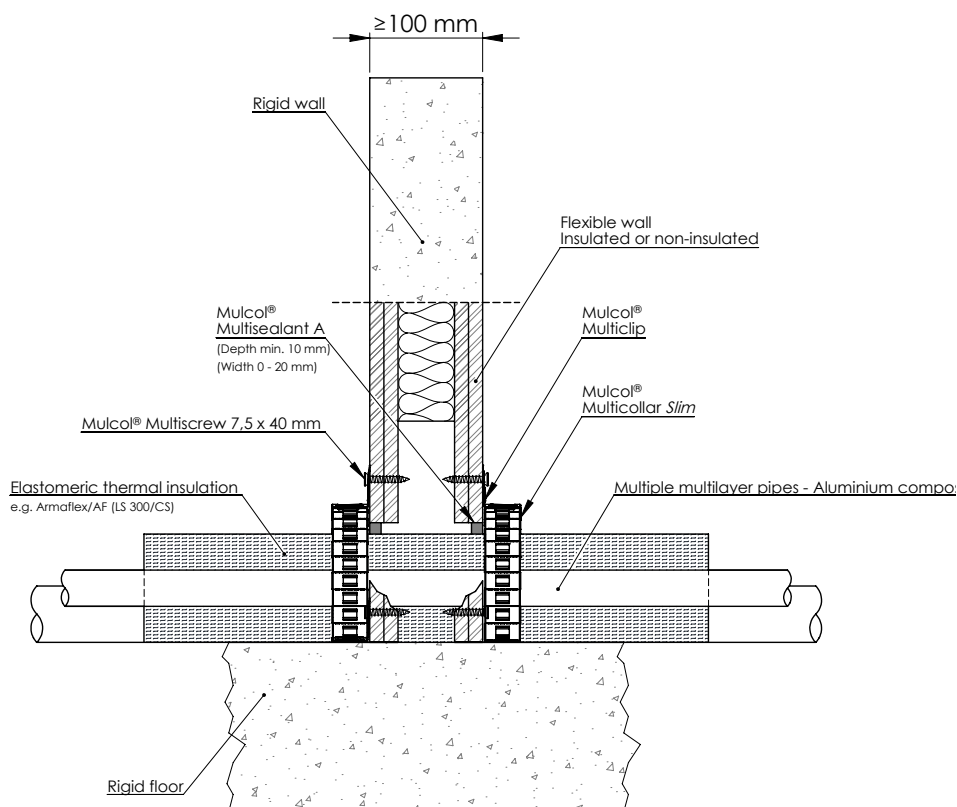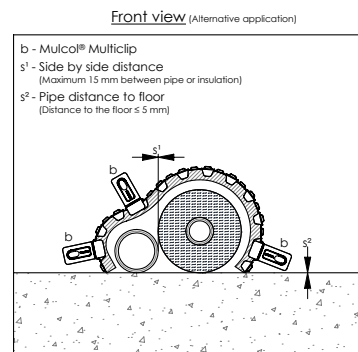
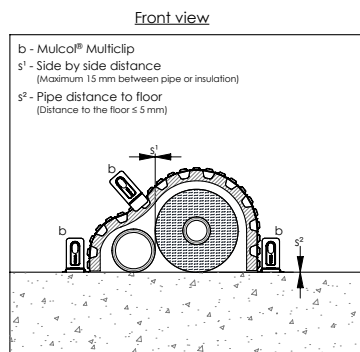


Drawing: FW.E-MC30f-MLP2-10.0.40

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 32$	3.0	ArmaFlex AF (min. class B _L -s3, d0 B-s3, d0)	9 - 32	LS 300 / CS LI 300 / CI	Multicollar Slim	EI 90 U/C
	$\leq \varnothing 50$	4.0	-				

A.1.16 Directly through wall - ≥ 100 mm - Multilayer pipes (MLC)

A.1.16.10 Multiple Multilayer pipes (MLC) at zero distance to floor - Elastomer, PE Foam, PE conduit LS-LI 300 / CS-CI


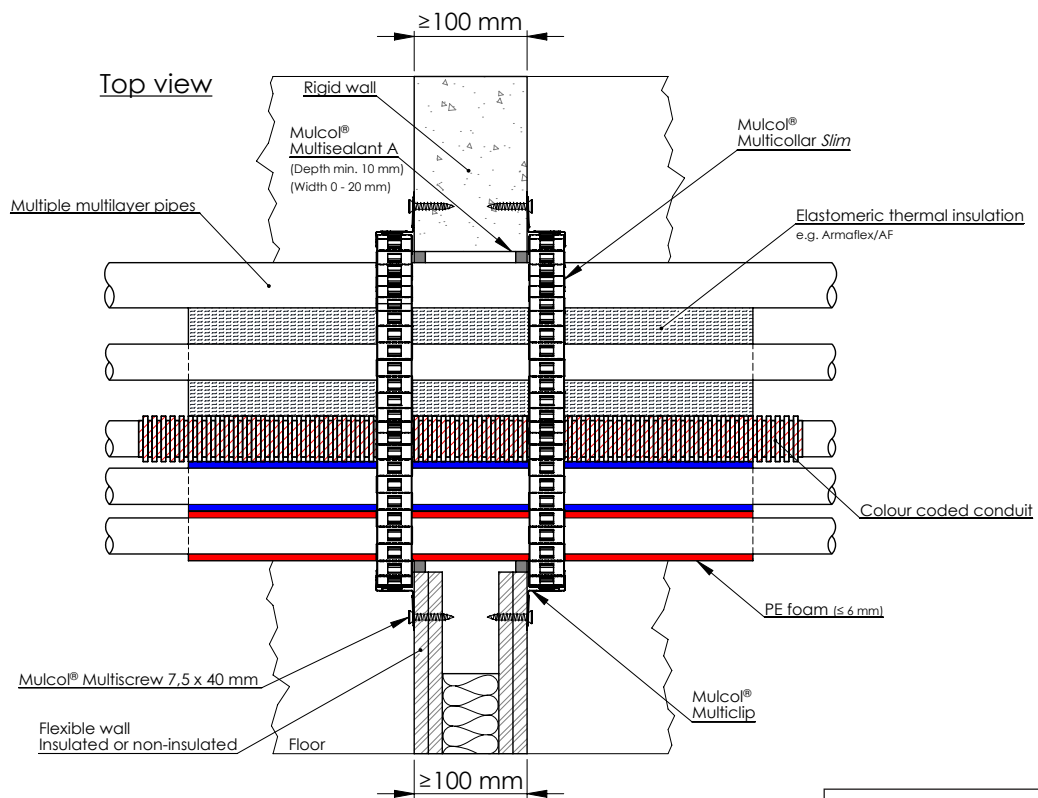
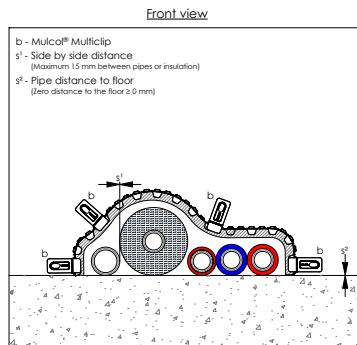


Drawing: FW.E-MC30f-MLP5-10.0.40

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 32$	3.0	PE Foam	6	LS 300 / CS LI 300 / CI	Multicollar Slim	EI 120 U/C
			PE-conduit ribbed	4			
			ArmaFlex AF (min. class B _L -s3, d0 B-s3, d0)	9 - 32			
	$\leq \varnothing 40$	4.0	-	-			

A.1.17 Multimastic FB1 - 2x50 mm - Metal pipes insulated mineral wool

A.1.17.1 Steel pipes - Multimastic FB1 - Glass wool LS 400 / CS

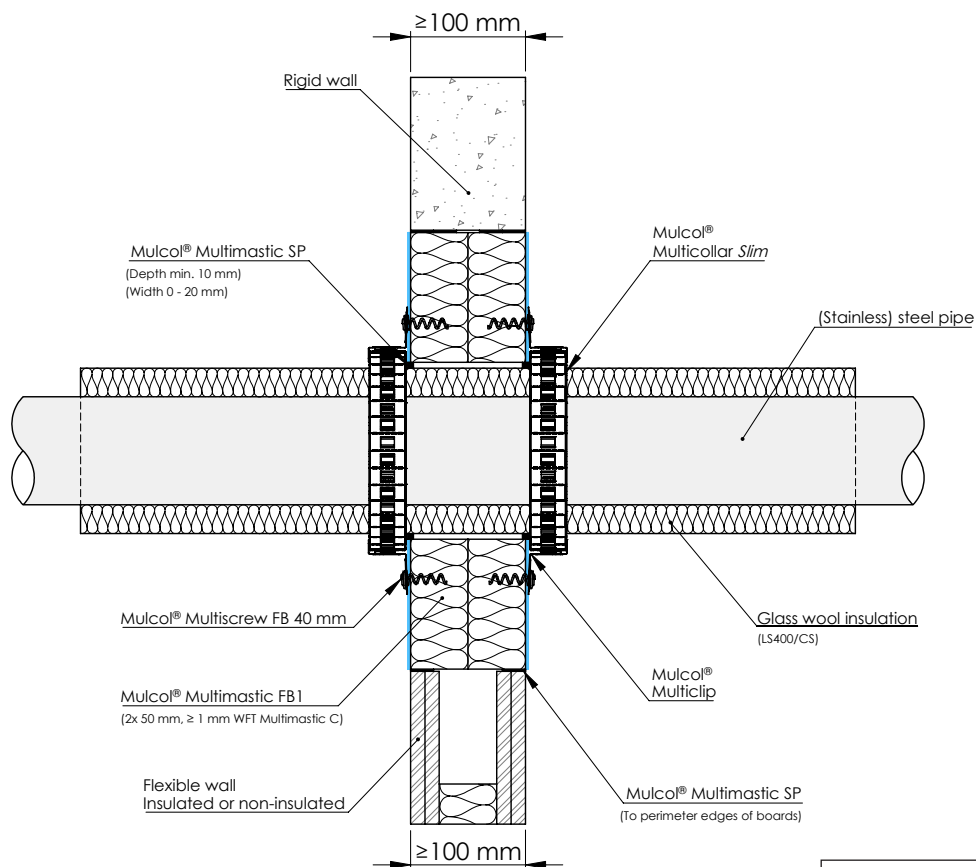
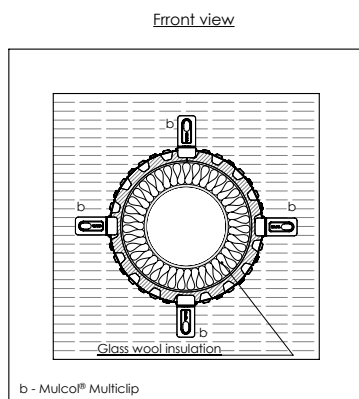


Drawing: PBfw.E-ST-MC30-MFB1.2.20

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimension	Wall thick-ness	Type	Thickness (mm)	Configuration			
(Stainless) Steel / cast iron	≤ Ø 76.2	≥ 3.3	Glass wool (≥ 33 kg/m³)	30	LS 400 / CS	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 90 C/U E 120 C/U
	≤ Ø 139.7	≥ 4.0		50				EI 60 C/U E 90 C/U

A.1.18 Multimortar - ≥ 100 mm - Metal pipes insulated mineral wool

A.1.18.1 Steel pipes - Multimortar - Glass wool LS 400 / CS

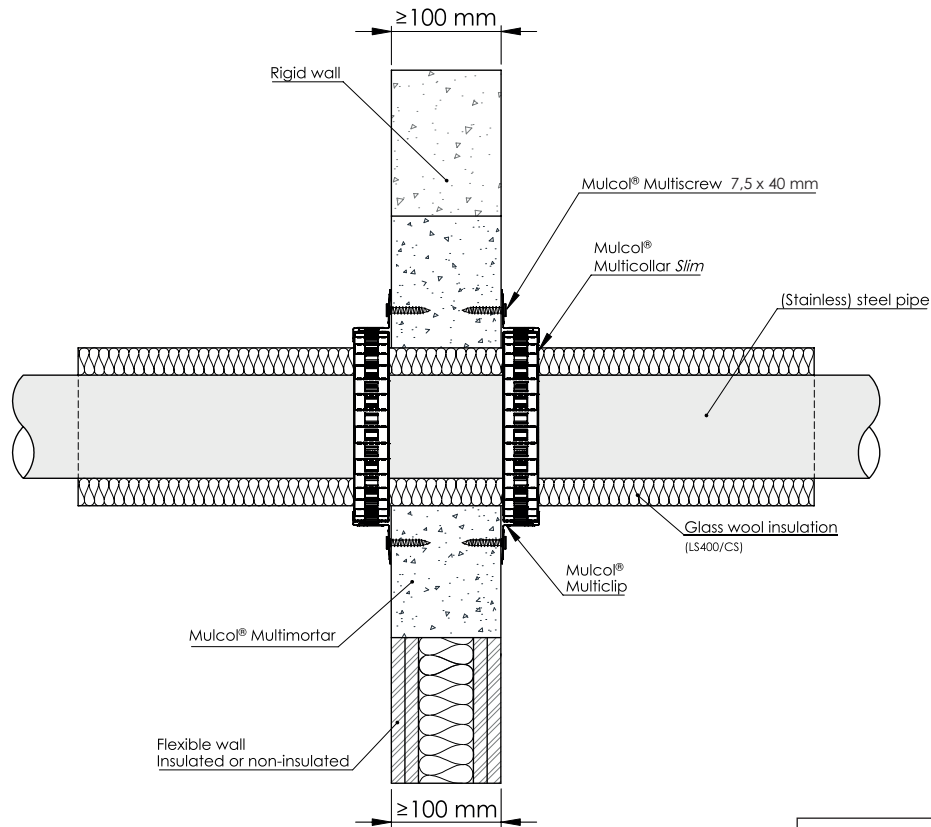
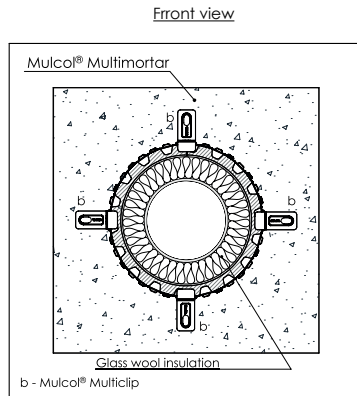


Drawing: FW.E-MC30-ST-MM1.2.21

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
(Stainless) Steel / cast iron	$\leq \varnothing 76.2$	≥ 3.3	Isover	≥ 30	LS 400 / CS	Multicollar Slim	EI 90 C/U, E 120 C/U
	$\leq \varnothing 139.7$	≥ 4.0	Climclover Glass wool ($\geq 33 \text{ kg/m}^3$)	≥ 50			EI 60 C/U, E 90 C/U

A.1.19 Directly through wall - ≥ 100 mm - Metal pipes insulated elastomer

A.1.19.1 Copper and steel pipes - Elastomer LS 500 / CS

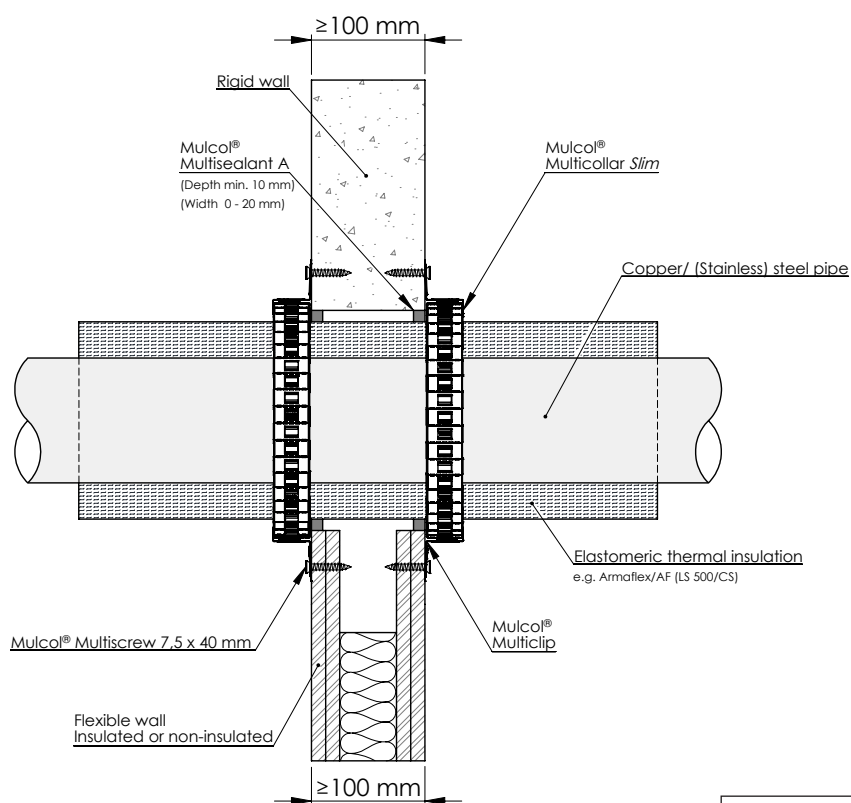
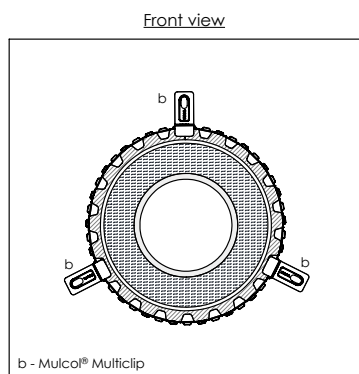


Drawing: FW.E-MC30-CU-10.0.22.LS

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
Copper / (Stainless) Steel / cast iron	≤ Ø 54	≥ 1.5	ArmaFlex AF (min. class B _L -s3, d0 B-s3, d0)	9 - 32	LS 500 / CS	Multicollar <i>Slim</i>	EI 60 C/U, E 120 C/U
				32			EI 90 C/U, E 120 C/U
	≤ Ø 88.9	≥ 2.0		9 - 32	CS		EI 45 C/U, E 120 C/U
(Stainless) Steel / cast iron	≤ Ø 219.1	≥ 4.0			LS 500 / CS		EI 60 C/U, E 120 C/U
					CS		EI 90 C/U, E 120 C/U

A.1.19 Directly through wall - ≥ 100 mm - Metal pipes insulated elastomer

A.1.19.2 Copper and steel pipes - Elastomer CI

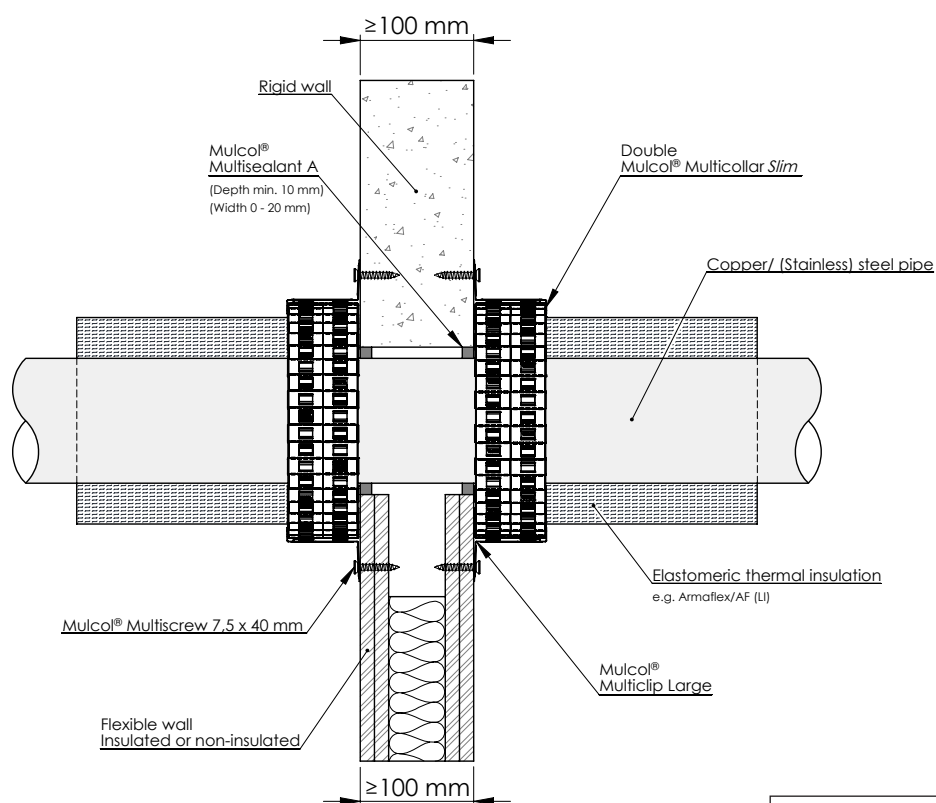
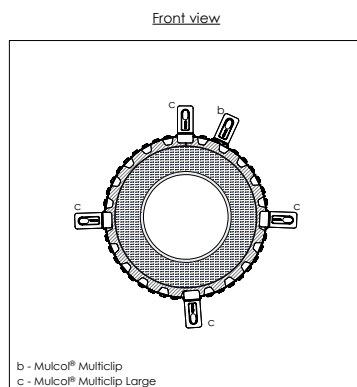


Drawing: FW.E-MC60-CU-20.0.22.LI

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
Copper/ (Stainless) Steel / cast iron	$\leq \varnothing 88.9$	≥ 2.0	ArmaFlex AF (min. class B _c -s3, d0 B-s3, d0)	9 - 32	CI	Multicollar Slim	EI 120 C/U
				32			EI 60 C/U, E 120 C/U

A.1.19 Directly through wall - ≥ 100 mm - Metal pipes insulated elastomer

A.1.19.3 Steel pipes - Elastomer CI

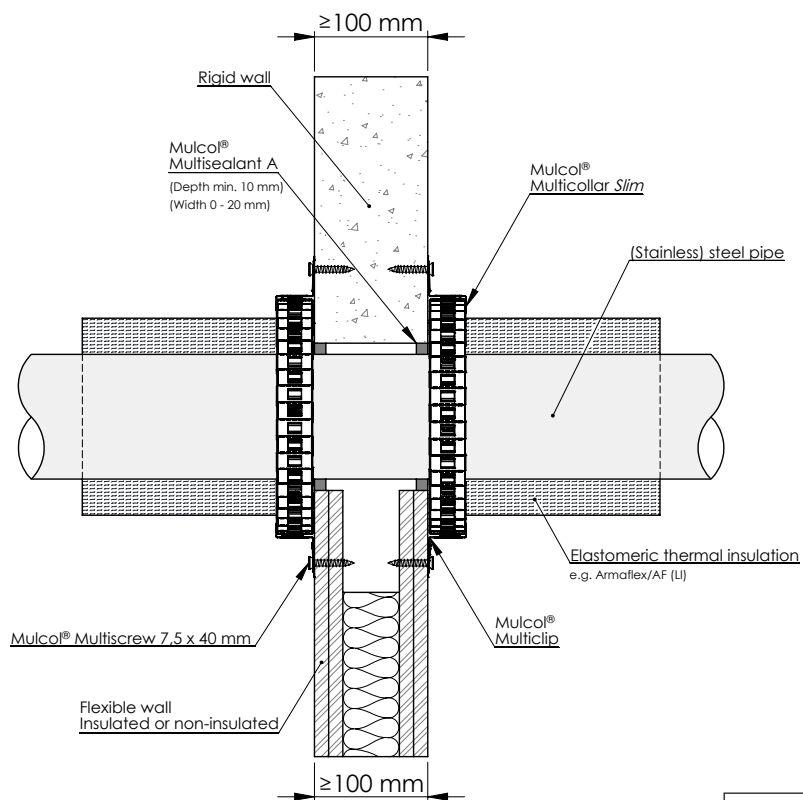
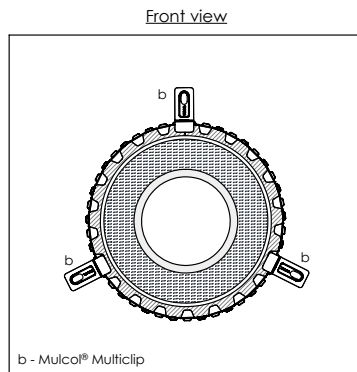


Drawing: FW.E-MC30-ST-10.0.22_LI

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
(Stainless) Steel / cast iron	$\leq \varnothing 168.3$	≥ 4.5	ArmaFlex AF (min. class B _L -s3, d0 B-s3, d0)	32	CI	Multicollar Slim	EI 120 C/U
				9 - 32			EI 60 C/U, E 120 C/U

A.1.20 Directly through wall - ≥ 100 mm - Metal pipes insulated elastomer

A.1.20.1 Copper and steel pipes - PIR / PUR foam LS 500 / CS

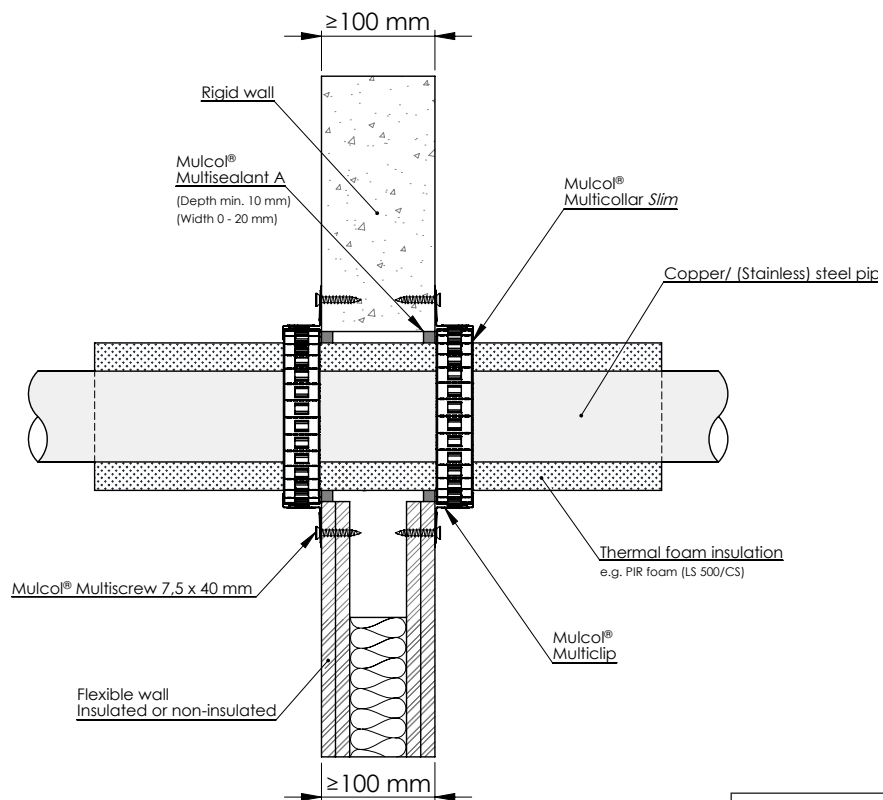
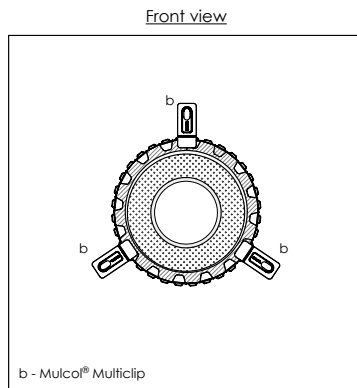


Drawing: FW.E-MC30-CU-10.0.25

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
Copper / (Stainless) Steel / cast iron	$\leq \varnothing 54$	≥ 1.5	PIR / PUR	25	LS 500 / CS	Multicollor Slim	EI 60 C/U, E 120 C/U
	$\leq \varnothing 76.1$	≥ 2.0					

A.1.20 Directly through wall - ≥ 100 mm - Metal pipes insulated elastomer

A.1.20.2 Steel pipes - PIR / PUR foam LS 500 / CS


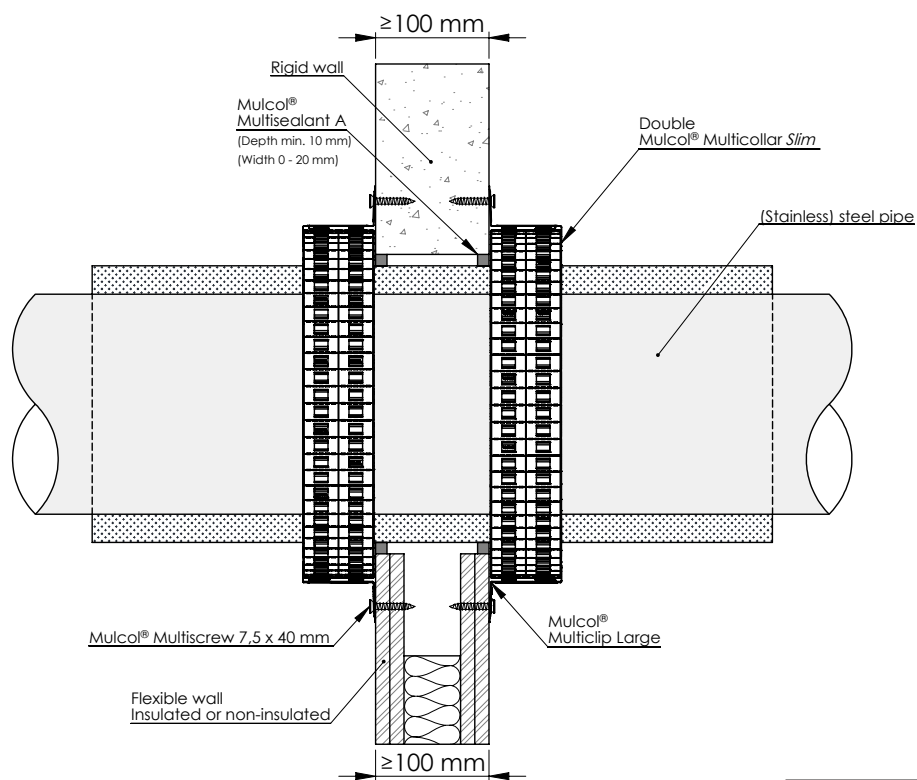
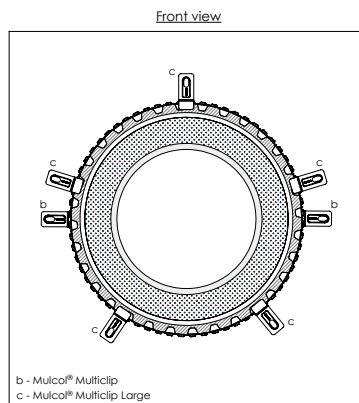


Drawing: FW.E-MC60-ST250-20.0.25

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
(Stainless) Steel / cast iron	$\leq \varnothing 219.1$	≥ 4.0	PIR / PUR	25	LS 500 / CS	Multicollar Slim	EI 60 C/U, E 120 C/U
					CS		EI 90 C/U, E 120 C/U

A.1.21 Multimastic FB1 - 2x50 mm - Multiple services

A.1.21.1 Airconditioning set

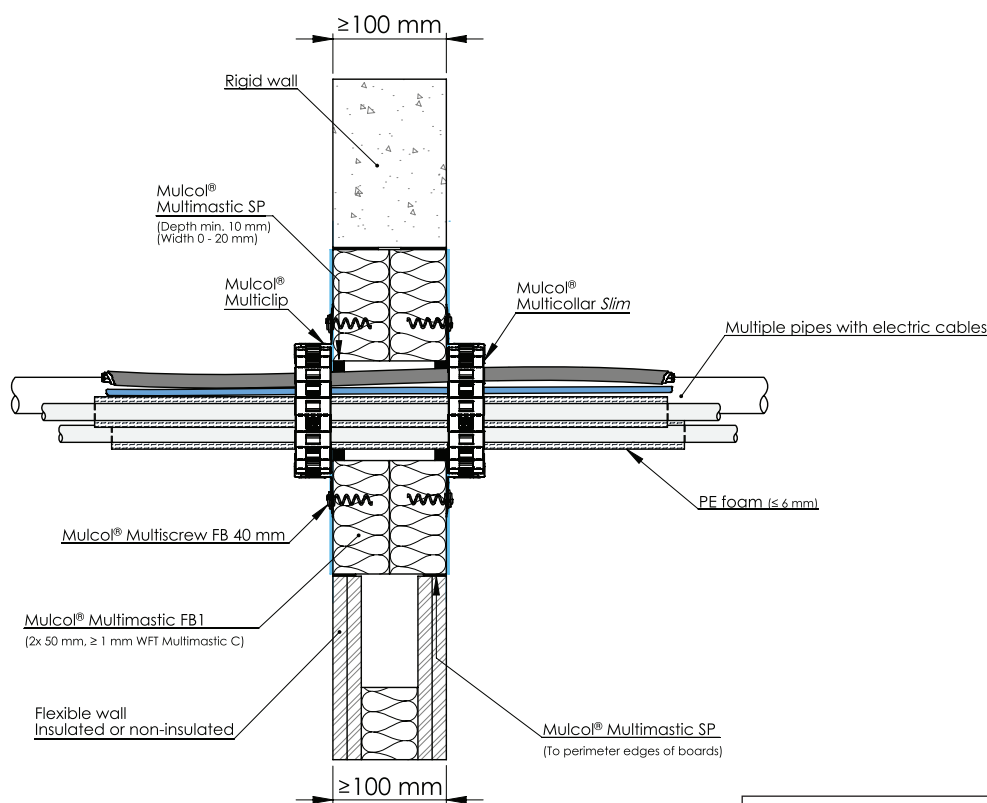

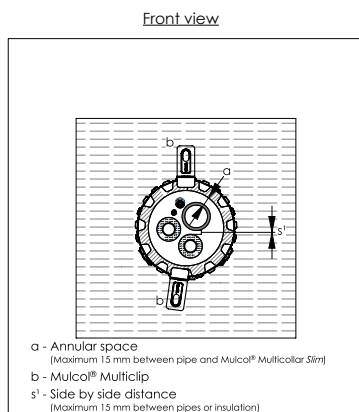


Drawing: PBfw.E-MLP5-MFB1.2.40

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer diameter	Wall thickness	Type	Thickness (mm)	Configuration		
Set of airconditioning pipes	$2x \leq \varnothing 15$	1.5	PE foam	≥ 6	LS 400 / CS LI 400 / CI	Multicollar <i>Slim</i>	EI 60 C/U E 120 C/U
PVC-U / PVC-C	$\leq \varnothing 40$	3.0	-	-	-		EI 60 U/U E 120 U/U
Telecommunication cable	UTP Cat 5/6	-	-	-	-		EI 60 E 120
Sheathed cable	$\leq 5 \times 2.5$ mm ²	-	-	-	-		

A.1.22 Multimastic FB2 - 1x60 mm - Multiple services

A.1.22.1 Airconditioning set

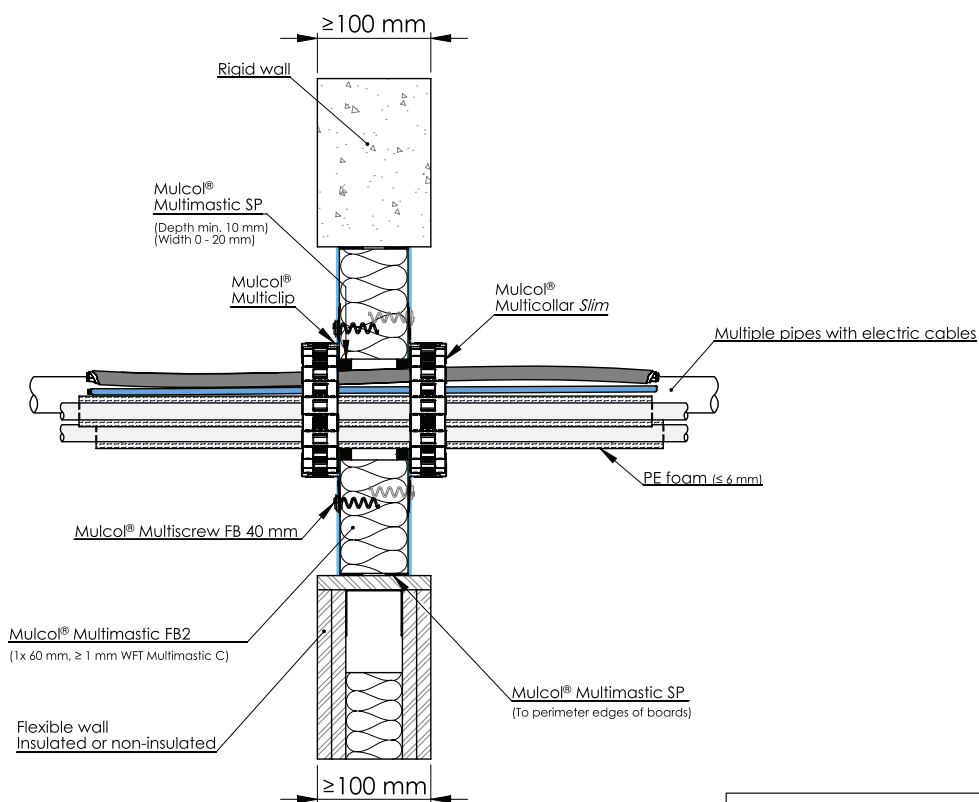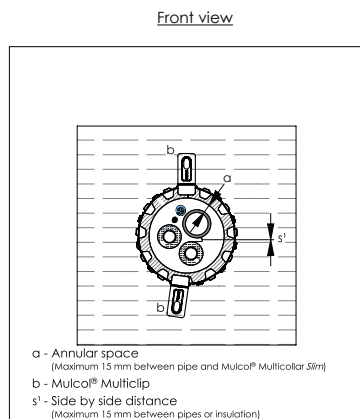



Drawing: PBfw.E-MLP5-MFB2.1.40

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer diameter	Wall thickness	Type	Thickness (mm)	Configuration		
Set of airconditioning pipes	$2x \leq \varnothing 15$	1.5	PE foam	≥ 6	LS 400 / CS LI 400 / CI	Multicollar Slim	EI 60 C/U E 120 C/U
PVC-U / PVC-C	$\leq \varnothing 40$	3.0	-	-	-		EI 60 U/U E 120 U/U
Telecommunication cable	UTP Cat 5/6	-	-	-	-		EI 60 E 120
Sheathed cable	$\leq 5 \times 2.5$ mm ²	-	-	-	-		

A.1.23 Multimortar + Multimastic FB - ≥ 100 mm - Multiple services

A.1.23.1 Airconditioning set

Front view

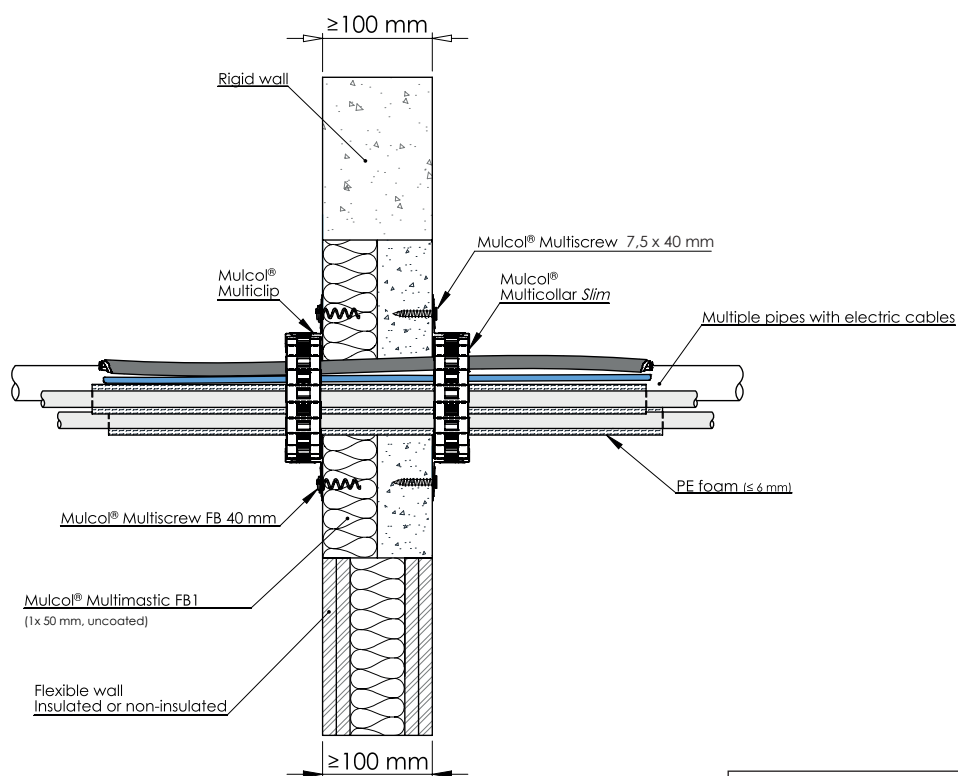
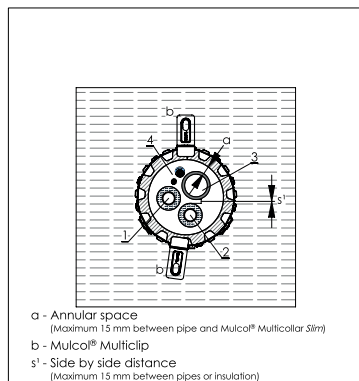


Drawing: FW.E-MC30-MLP5-MM2.5.40

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer diameter	Wall thickness	Type	Thickness (mm)	Configuration		
Set of airconditioning pipes	$2x \leq \varnothing 15$	1.5	PE foam	≥ 6	LS 400 / CS LI 400 / CI	Multicollar Slim	EI 60 C/U E 120 C/U
PVC-U / PVC-C	$\leq \varnothing 40$	3.0					EI 60 U/U E 120 U/U
Telecommunication cable	UTP Cat 5/6						
Sheathed cable	$\leq \text{YMKV } 5 \times 2.5 \text{ mm}^2$						EI 60 E 120

A.1.23 Multimortar + Multimastic FB - ≥ 100 mm - Multiple services

A.1.23.2 Multiple plastic pipes

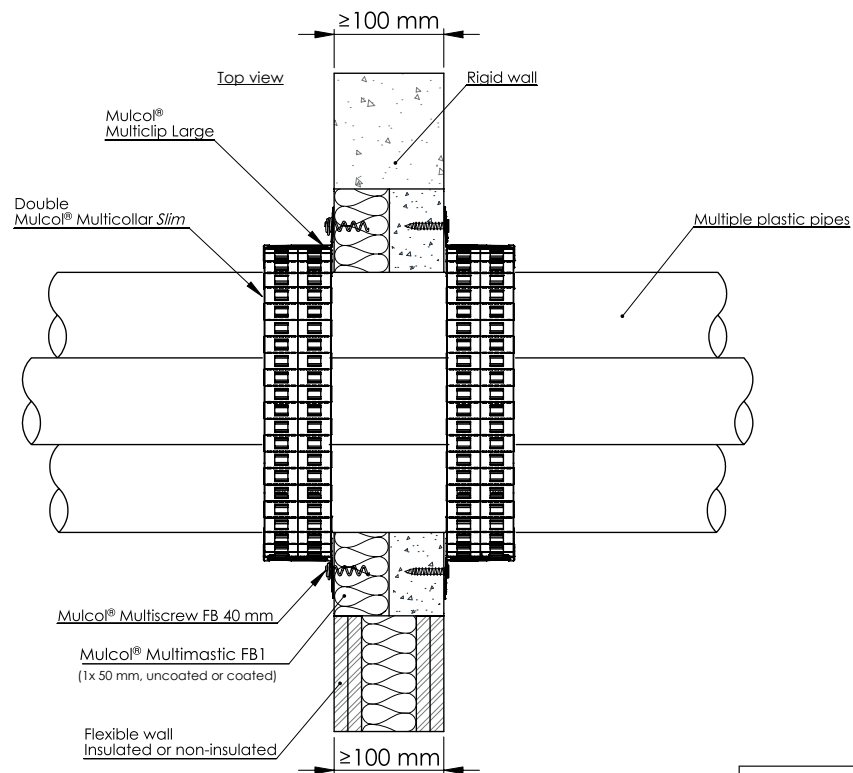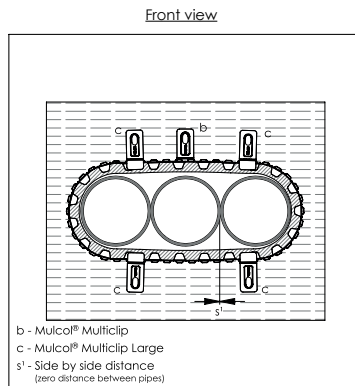

Drawing: FW.E-MC60-MLP3-MM2.5.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE(-HD) / PE-X / ABS / SAN+PVC	$3x \leq \varnothing 110$	2.7	Multicollar Slim double	EI 90 U/C, E 120 U/C

A.1.24



Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm -

Multiple services

A.1.24.1

Airconditioning set

Front view

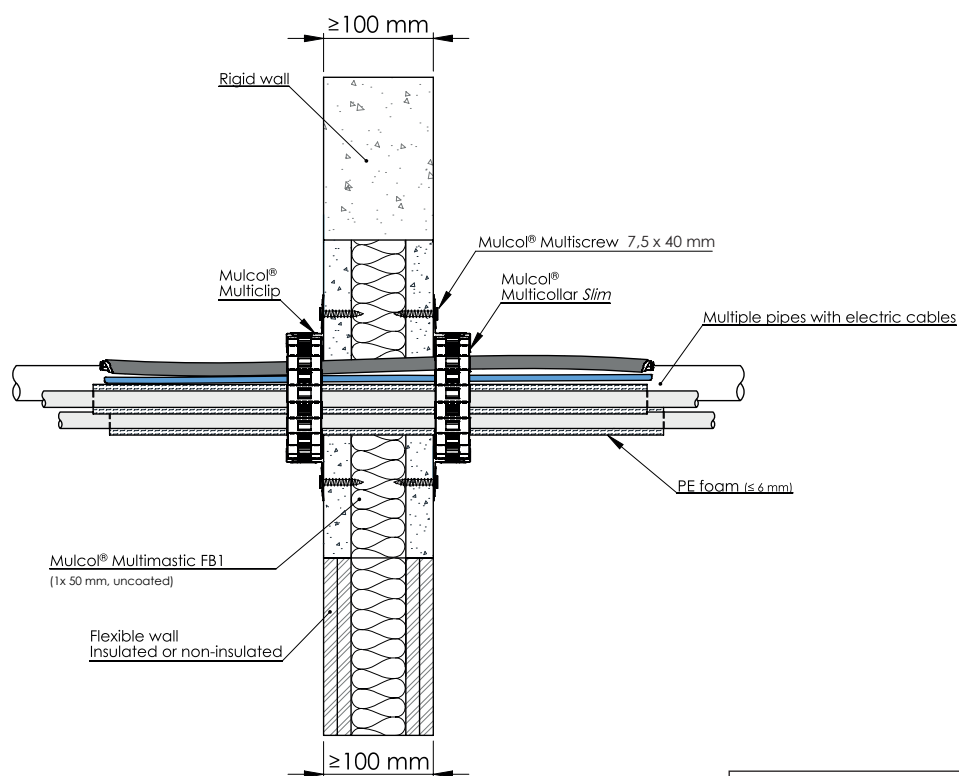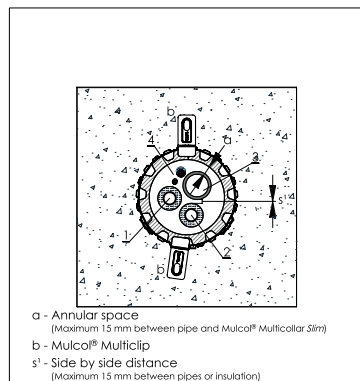



Drawing: FW-MC30-MLP5-MM3.4.40

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer diameter	Wall thickness	Type	Thickness (mm)	Configuration		
Set of airconditioning pipes	$2x \leq \varnothing 15$	1.5	PE foam	≥ 6	LS 400 / CS LI 400 / CI	Multicollar Slim	EI 60 C/U E 120 C/U
PVC-U / PVC-C	$\leq \varnothing 40$	3.0	-	-	-		EI 60 U/U E 120 U/U
Telecommunication cable	UTP Cat 5/6	-	-	-	-		EI 60 E 120
Sheathed cable	$\leq \text{YMKV } 5 \times 2.5 \text{ mm}^2$	-	-	-	-		

A.1.24 Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm -

Multiple services

A.1.24.2 Multiple plastic pipes

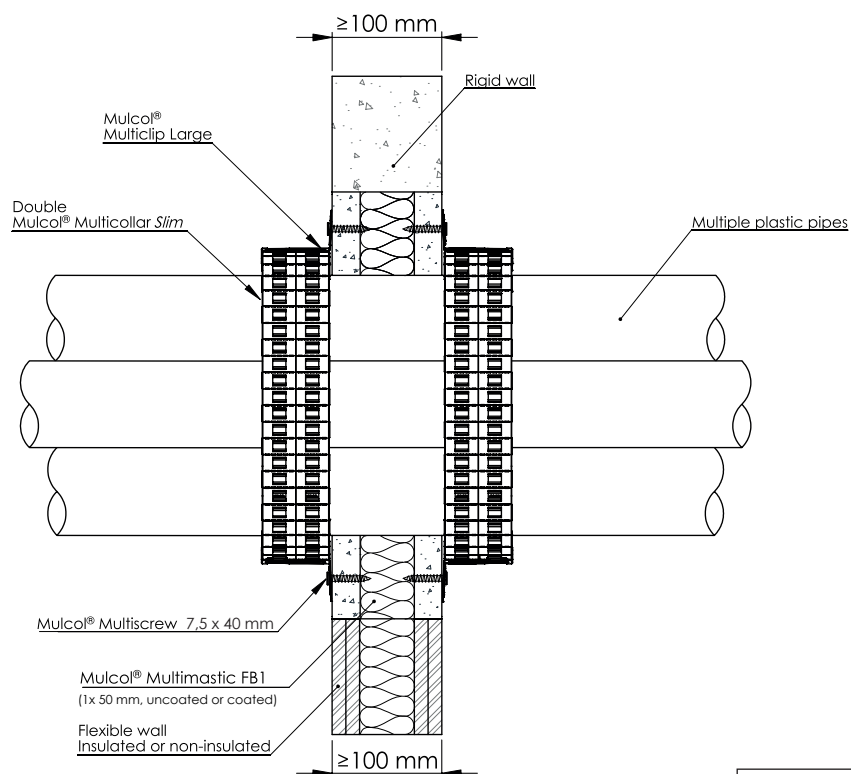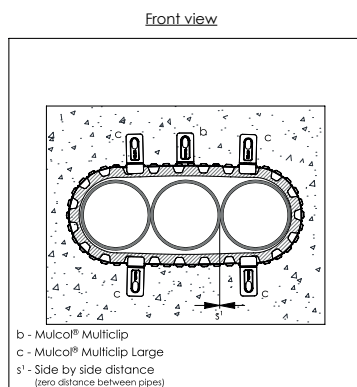



Drawing: FW.E-MC60-MLP3-MM3.4.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE(-HD) / PE-X / ABS / SAN+PVC	$3x \leq \varnothing 110$	2.7	Multicollar <i>Slim</i> double	EI 90 U/C, E 120 U/C

A.1.25 Multimortar - ≥ 100 mm - Multiple services

A.1.25.1 Airconditioning set

Front view

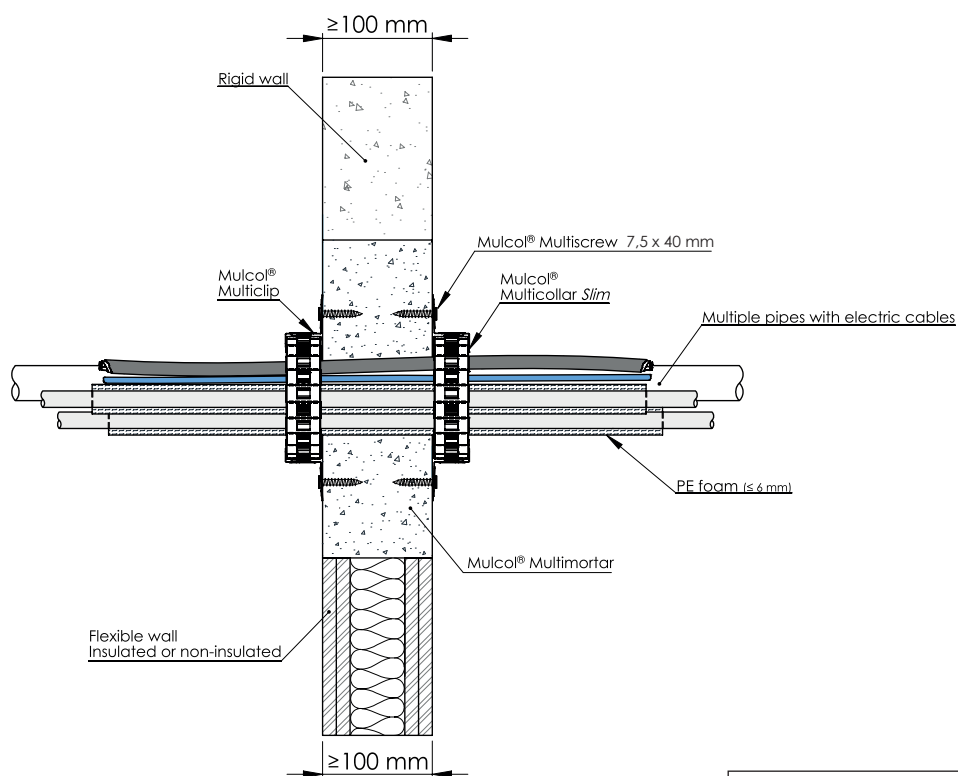
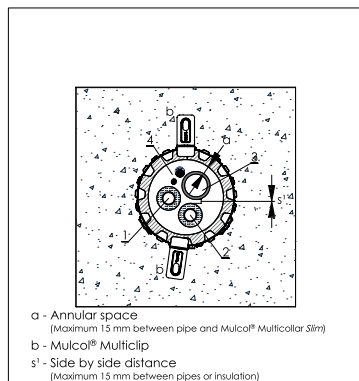


Drawing: FW.E-MC30-MLP5-MM1.2.40

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer diameter	Wall thickness	Type	Thickness (mm)	Configuration		
Set of airconditioning pipes	$2x \leq \varnothing 15$	1.5	PE foam	≥ 6	LS 400 / CS LI 400 / CI	Multicollar <i>Slim</i>	EI 60 C/U E 120 C/U
PVC-U / PVC-C	$\leq \varnothing 40$	3.0	-	-	-		EI 60 U/U E 120 U/U
Telecommunication cable	UTP Cat 5/6	-	-	-	-		
Sheathed cable	$\leq \text{YMKV } 5 \times 2.5 \text{ mm}^2$	-	-	-	-		EI 60 E 120

A.1.25 Multimortar - ≥ 100 mm - Multiple services



A.1.25.2 Multiple airconditioning sets

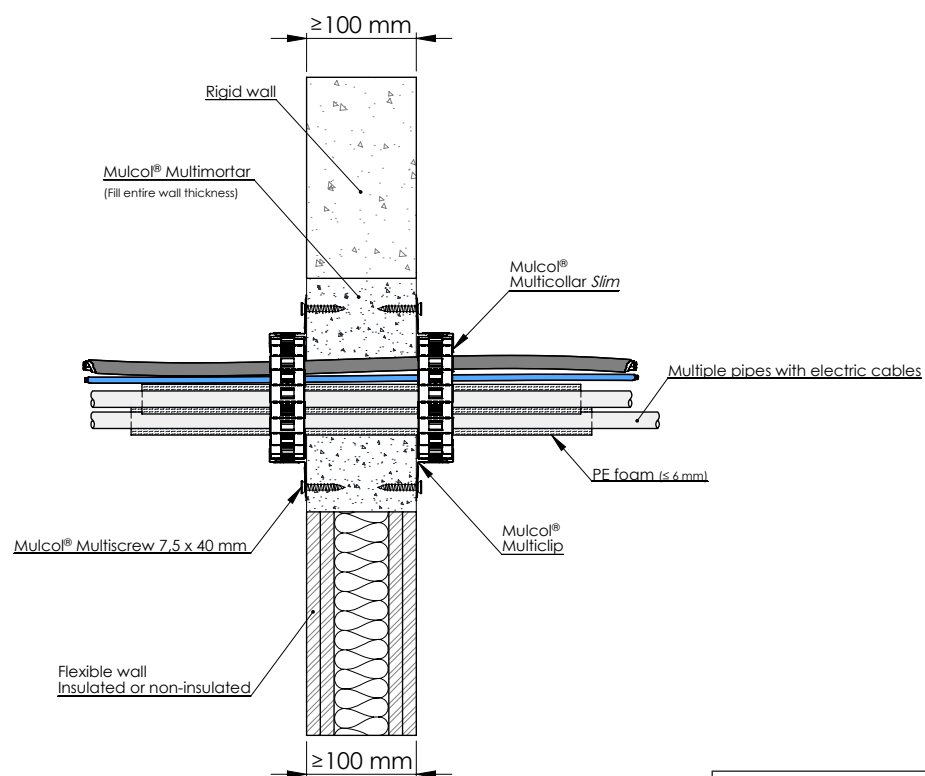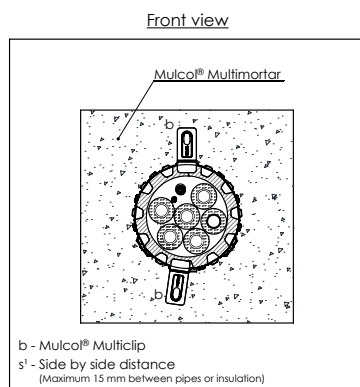

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer diameter	Wall thickness	Type	Thickness (mm)	Configuration		
Multiple sets of airconditioning pipes	6x ≤ Ø 15	1.5	PE foam	≤ 6	LS 400 / CS LI 400 / CI	Multicollar Slim	EI 60 C/U E 90 C/U
Sheathed cable ≤ 3 pcs.	≤ YMKV 5 x 2.5 mm²	-	-	-	-		

A.1.25 Multimortar - ≥ 100 mm - Multiple services

A.1.25.3 Multiple plastic pipes

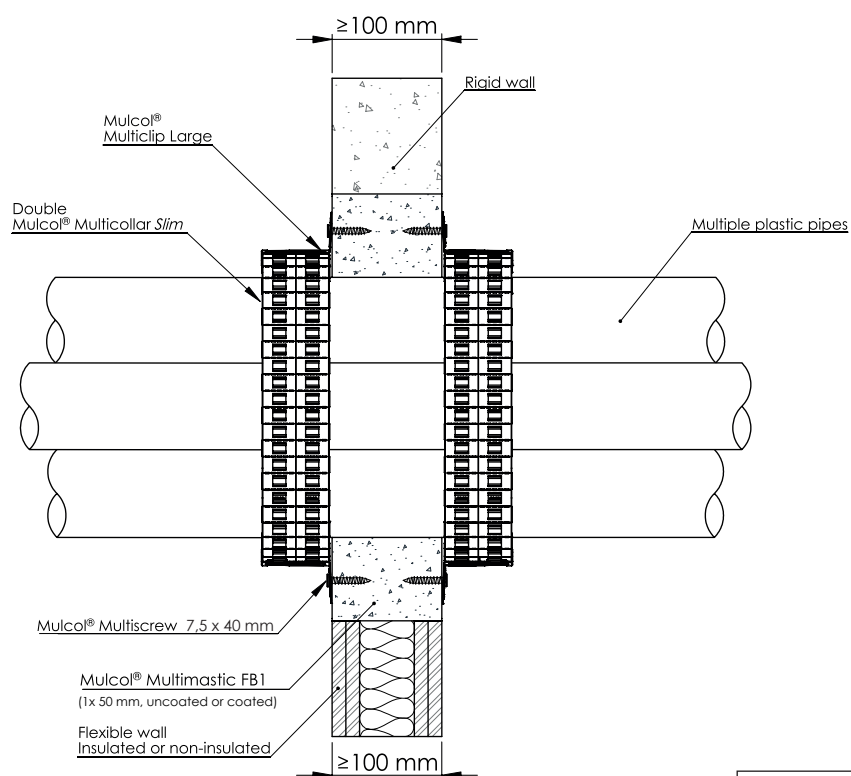
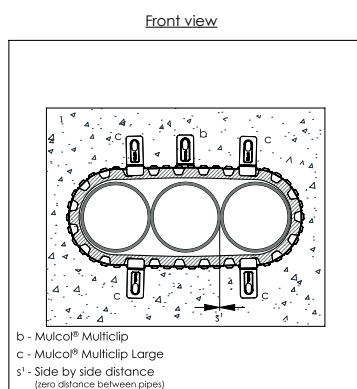


Drawing: FW.E-MC60-MLP3-MM1.2.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE(-HD) / PE-X / ABS / SAN+PVC	$3x \leq \varnothing 110$	2.7	Multicollar Slim double	EI 90 U/C, E 120 U/C

A.1.26 Directly through wall - ≥ 100 mm - Multiple services

A.1.26.1 Multiple pipes and cables

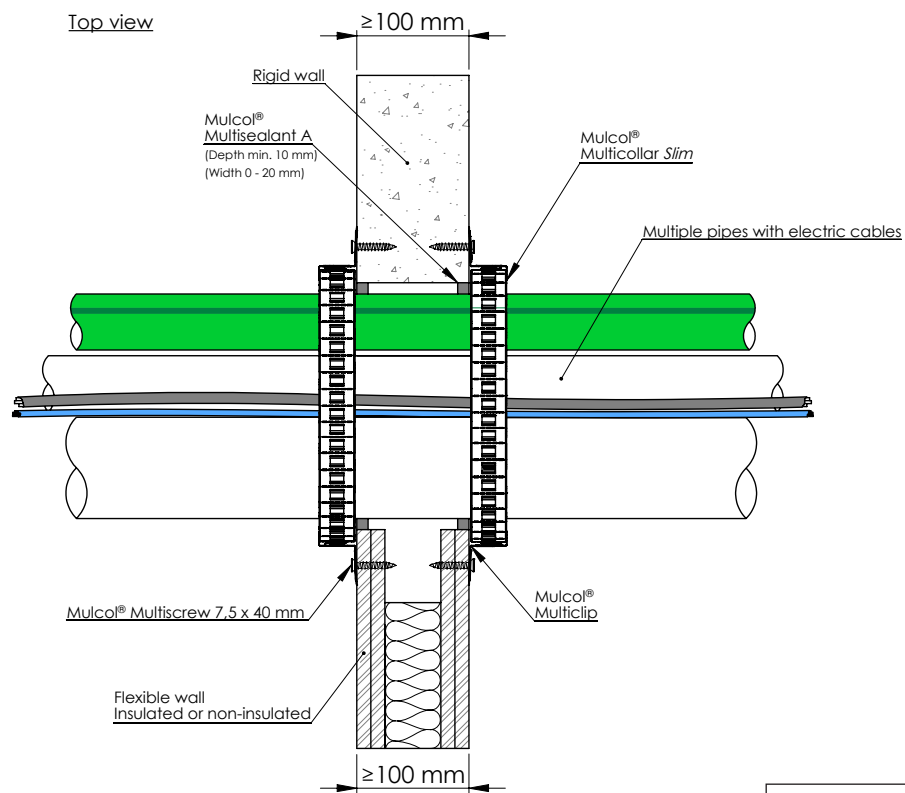
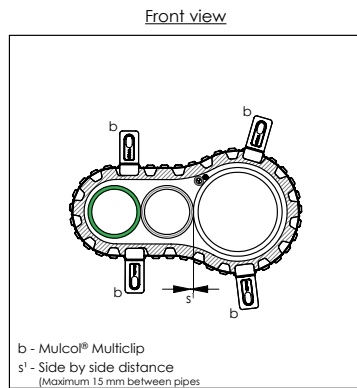


Drawing: FW.E-MC30-MLP3-EC-10.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE(-HD) / PE-X / ABS / SAN+PVC	$\leq \varnothing 90$	2.8	Multicollar Slim	EI 120 U/U
Multilayer pipes (MLC)	$\leq \varnothing 50$	4.0		EI 90 U/C, E 120 U/C
Aquatherm Green-MF		6.9		EI 120 U/C
Telecommunication cable	UTP Cat 5/6	-		EI 120
Sheathed cable	$\leq 5 \times 2.5 \text{ mm}^2$	-		

A.1.26 Directly through wall - ≥ 100 mm - Multiple services

A.1.26.2 Multiple pipes and cables - Elastomer LS-LI 300 / CS-CI

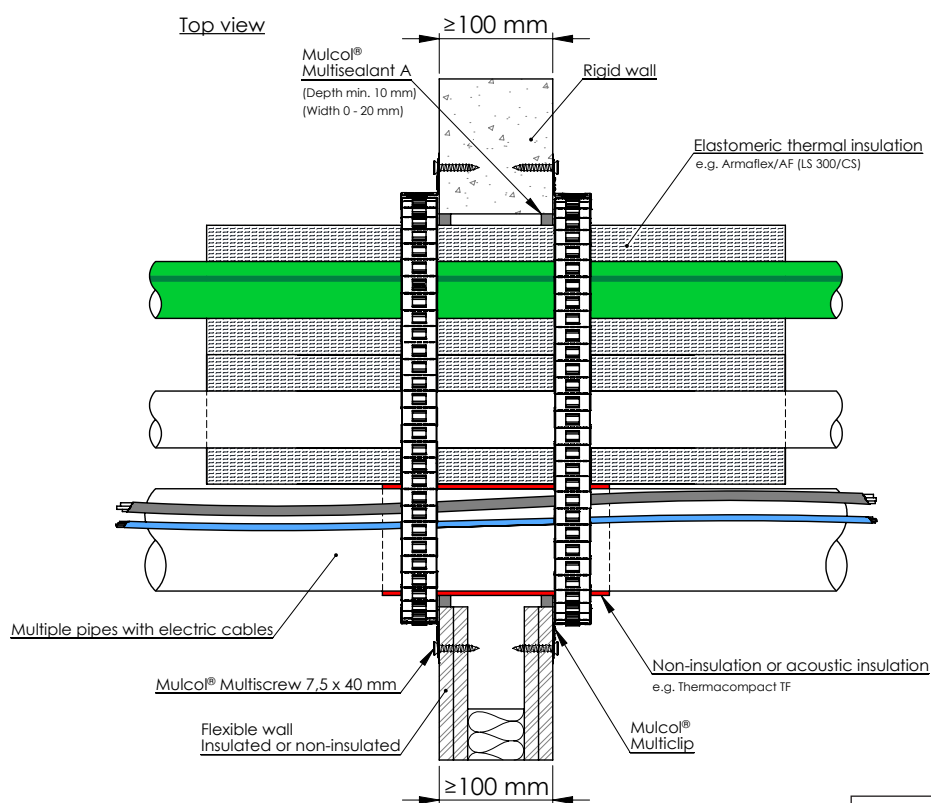
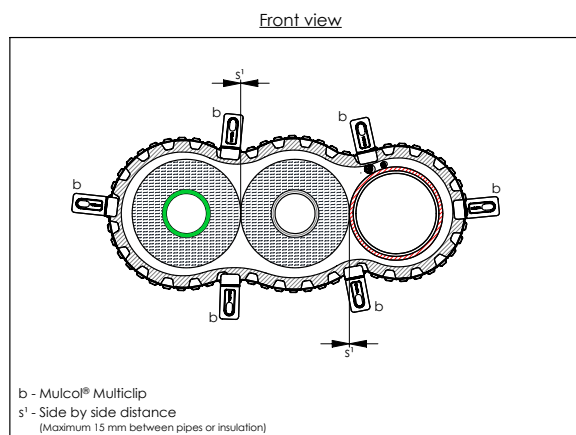


Drawing: FW.E-MC30-MLP3-EC-10.0.40

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer diameter	Wall thickness	Type	Thickness (mm)	Configuration		
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 90	2.8	ArmaFlex AF	4	LS 300 / CS LI 300 / CI	Multicollar <i>Slim</i>	EI 60 C/U
Multilayer pipes (MLC)	≤ Ø 50	4.0	(min. class B _L -s3, d0 B-s3, d0)	9 - 32			
Aquatherm Green-MF		6.9					
Telecommunication cable	UTP Cat 5/6	-	-	-	-		EI 60
Sheathed cable	≤ YMKV 5 x 2.5 mm ²	-	-	-	-		

A.1.26 Directly through wall - ≥ 100 mm - Multiple services

A.1.26.3 Airconditioning set

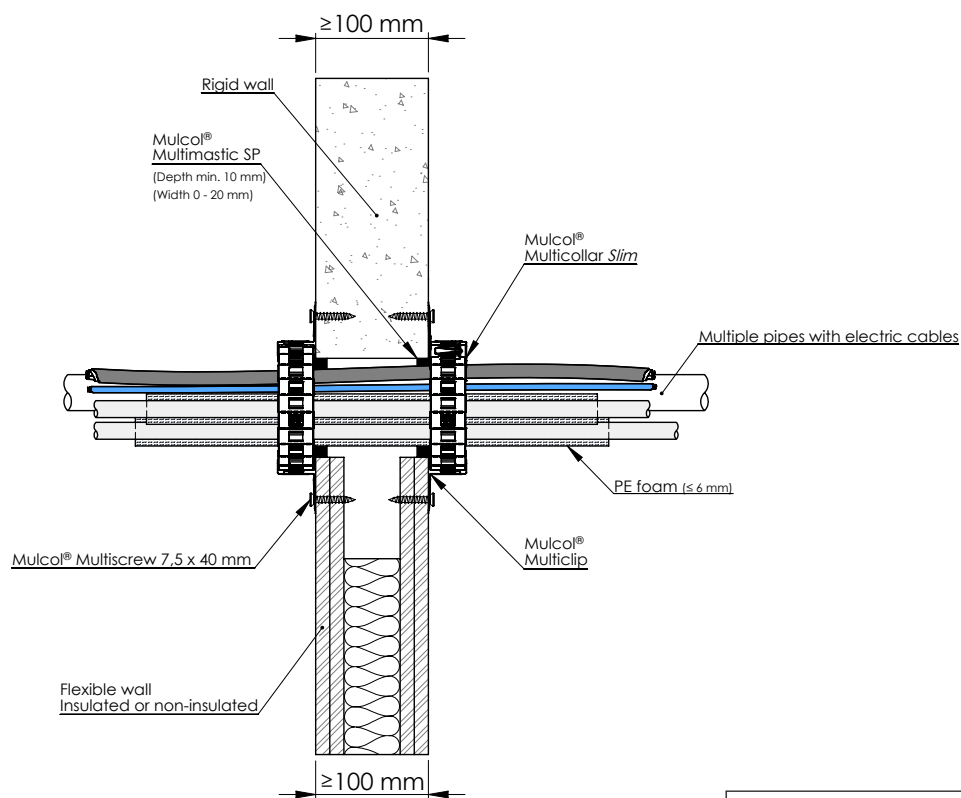
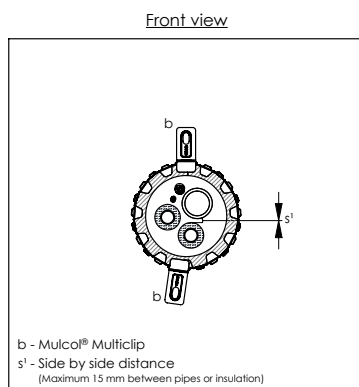


Drawing: FW.E-MC30-MLP5-EC-10.0.40

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer diameter	Wall thickness	Type	Thickness (mm)	Configuration		
Set of airconditioning pipes	$2x \leq \varnothing 15$	1.5	PE foam	≥ 6	LS 400 / CS LI 400 / CI	Multicollar Slim	EI 60 C/U
PVC-U / PVC-C	$\leq \varnothing 40$	3.0	-	-	-		EI 120 U/U
Telecommunication cable	UTP Cat 5/6	-	-	-	-		EI 120
Sheathed cable	$\leq \text{YMKV } 5 \times 2.5 \text{ mm}^2$	-	-	-	-		

A.1.26 Directly through wall - ≥ 100 mm - Multiple services

A.1.26.4 Multiple plastic pipes

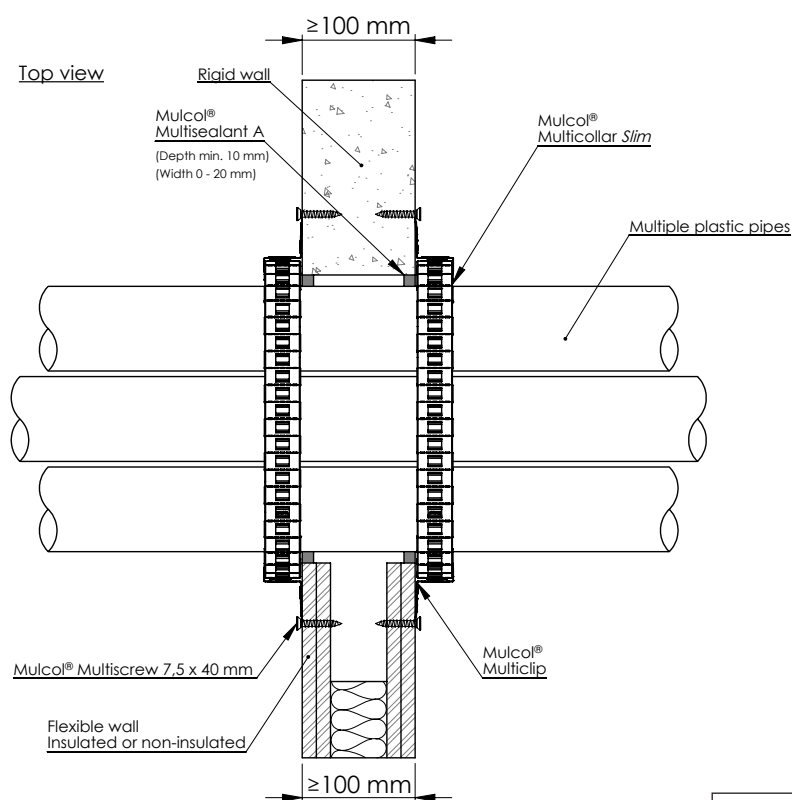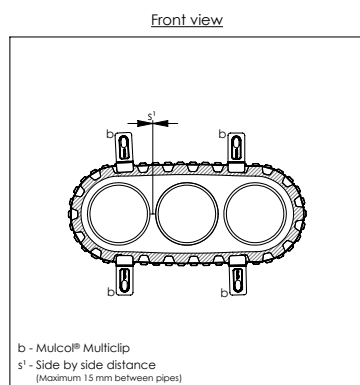



Drawing: FW.E-MC30-MLP3-10.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE(-HD) / PE-X / ABS / SAN+PVC	$3x \leq \varnothing 110$	2.7	Multicollar <i>Slim</i> double	EI 90 U/C, E 120 U/C

A.1.27 Directly through wall - ≥ 100 mm - Flue gas pipes

A.1.27.1 Aluminium flue gas pipes

Front view

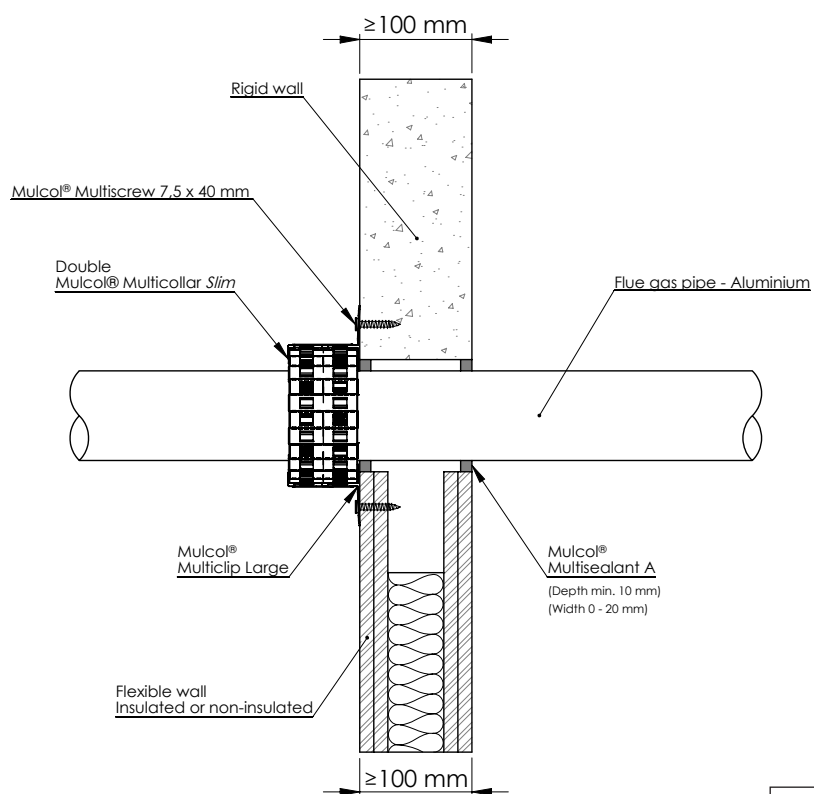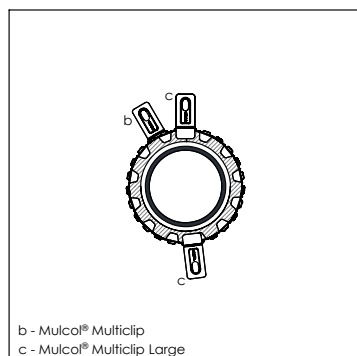



Drawing: FW.E-MC60-RGA-21.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aluminium	$\leq \varnothing 80$	1.5	Multicollar <i>Slim</i> double	EI 15 U/C, E 90 U/C
	$\leq \varnothing 130$			E 90 U/C

A.1.27 Directly through wall - ≥ 100 mm - Flue gas pipes

A.1.27.2 Concentric steel flue gas pipes

Front view

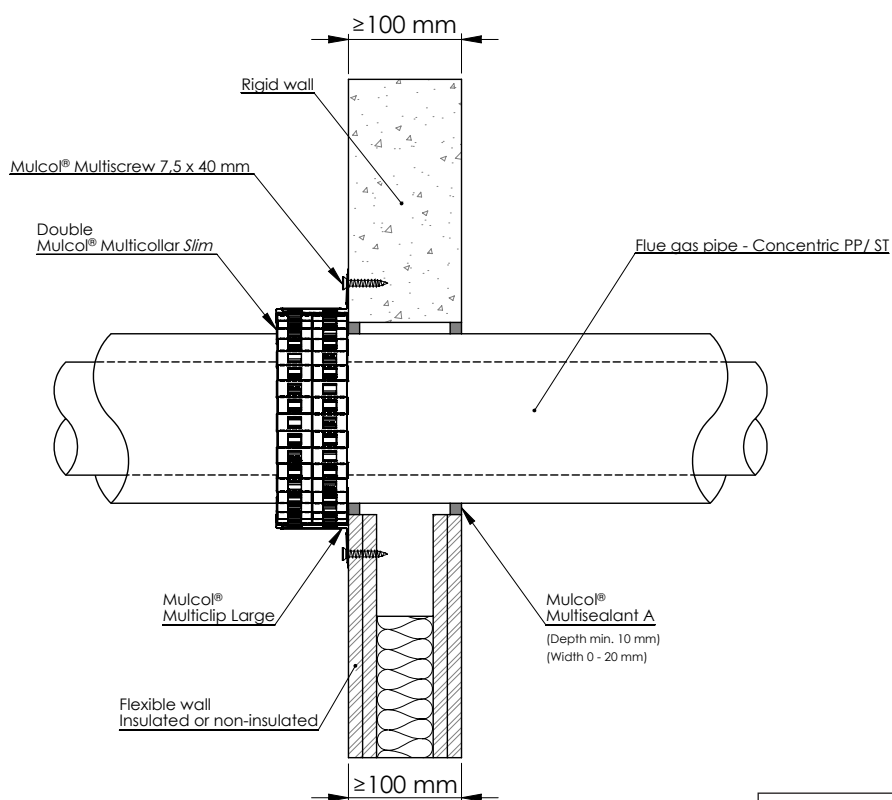
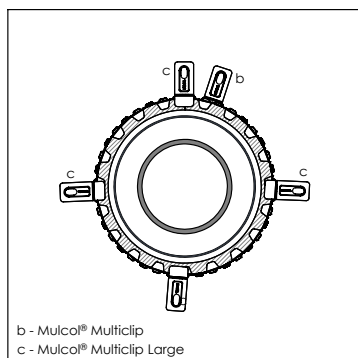


Drawing: FW.E-MC60-RGAT-21.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer pipe dimension	Inner pipe dimension		
Steel / PP flue gas system concentric	$\leq \varnothing 110$	$\leq \varnothing 60$	Multicollar Slim double	E 90 U/C
	$\leq \varnothing 125$	$\leq \varnothing 80$		
	$\leq \varnothing 150$	$\leq \varnothing 100$		
	$\leq \varnothing 200$	$\leq \varnothing 130$		

A.1.27 Directly through wall - ≥ 100 mm - Flue gas pipes

A.1.27.3 Plastic flue gas pipes

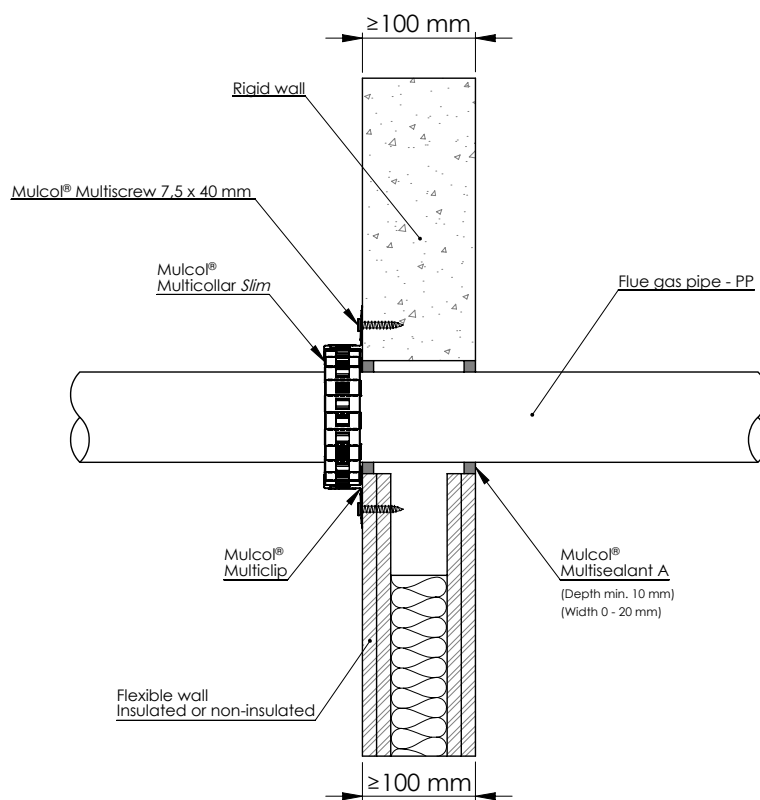
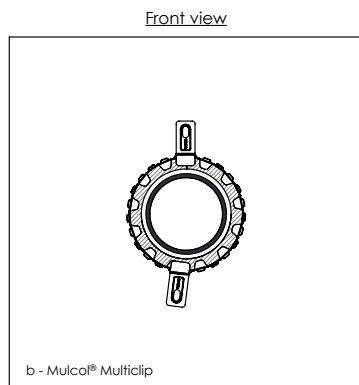


Drawing: FW.E-MC30-RGA_PP-11.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PP	$\leq \varnothing 40$	1.8 - 4.0	Multicollar Slim	EI 90 U/U
	$\leq \varnothing 125$	3.1 - 4.0		

A.1.27 Directly through wall - ≥ 100 mm - Flue gas pipes

A.1.27.4 Concentric plastic flue gas pipes

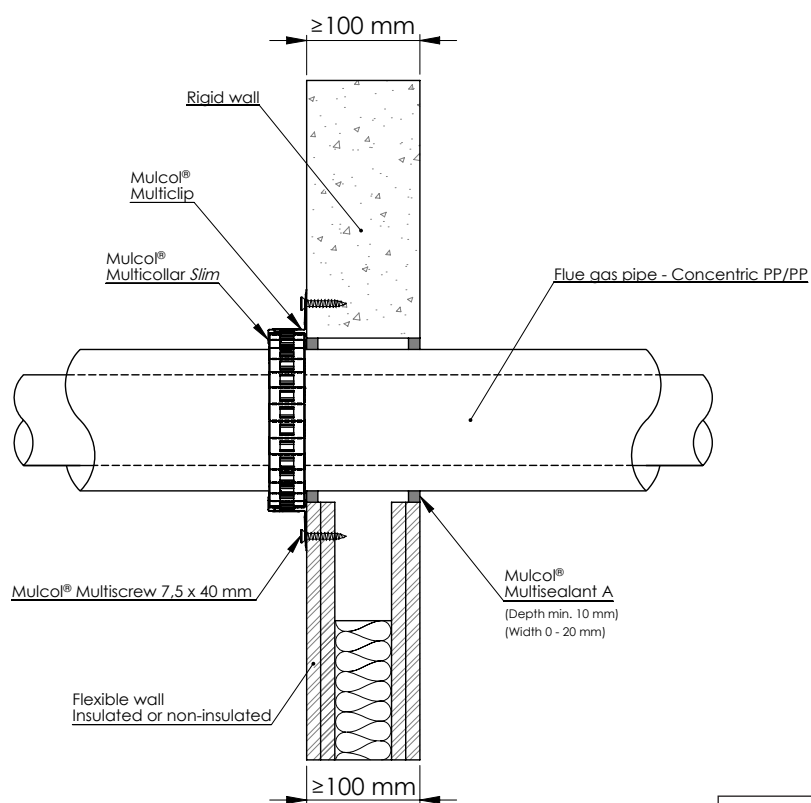
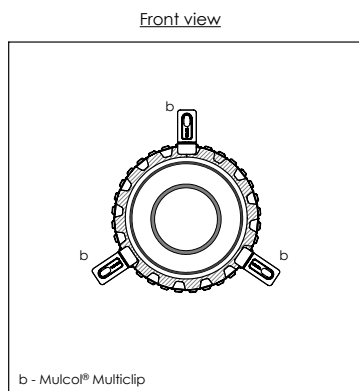


Drawing: FW.E-MC30-RGAT_PP-11.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PP / PP	$\leq \varnothing 40$	1.8 - 4.0	Multicollar Slim	EI 90 U/U
	$\leq \varnothing 125$	3.1 - 4.0		

A.2.1 Directly through wall - ≥ 70 mm - Flue gas pipes

A.2.1.1 Aluminium flue gas pipes

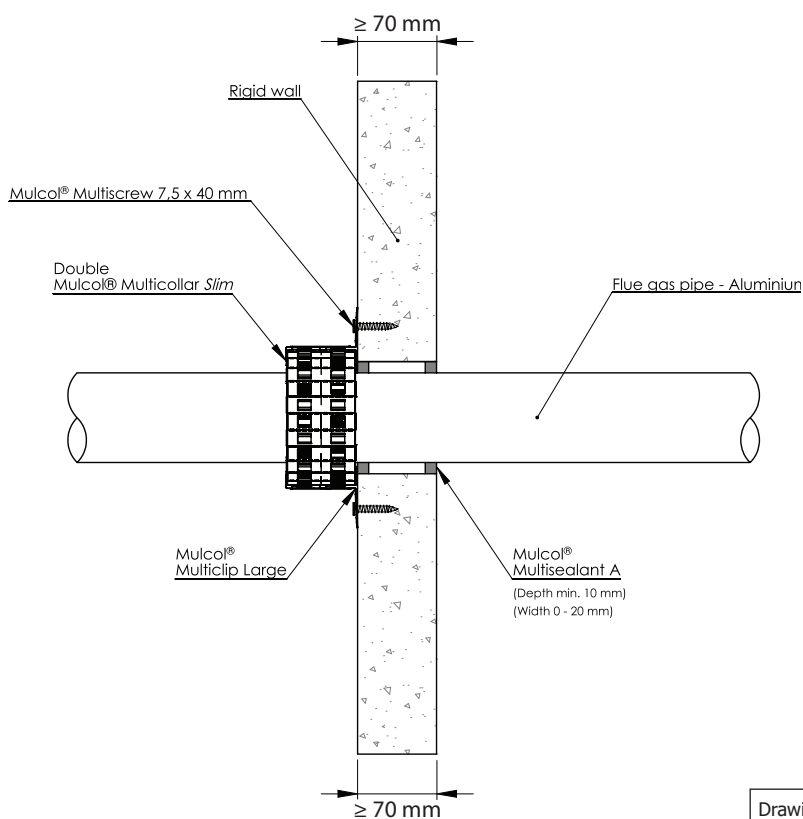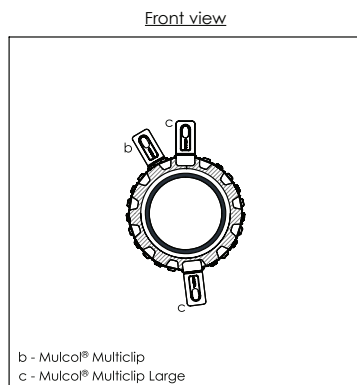



Drawing: RW.E-MC60-RGA-21.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aluminium	$\leq \varnothing 80$	1.5	Multicollar <i>Slim</i> double	EI 15 U/C, E 90 U/C
	$\leq \varnothing 130$			E 90 U/C

A.2.1 Directly through wall - ≥ 70 mm - Flue gas pipes

A.2.1.2 Concentric steel flue gas pipes

Front view

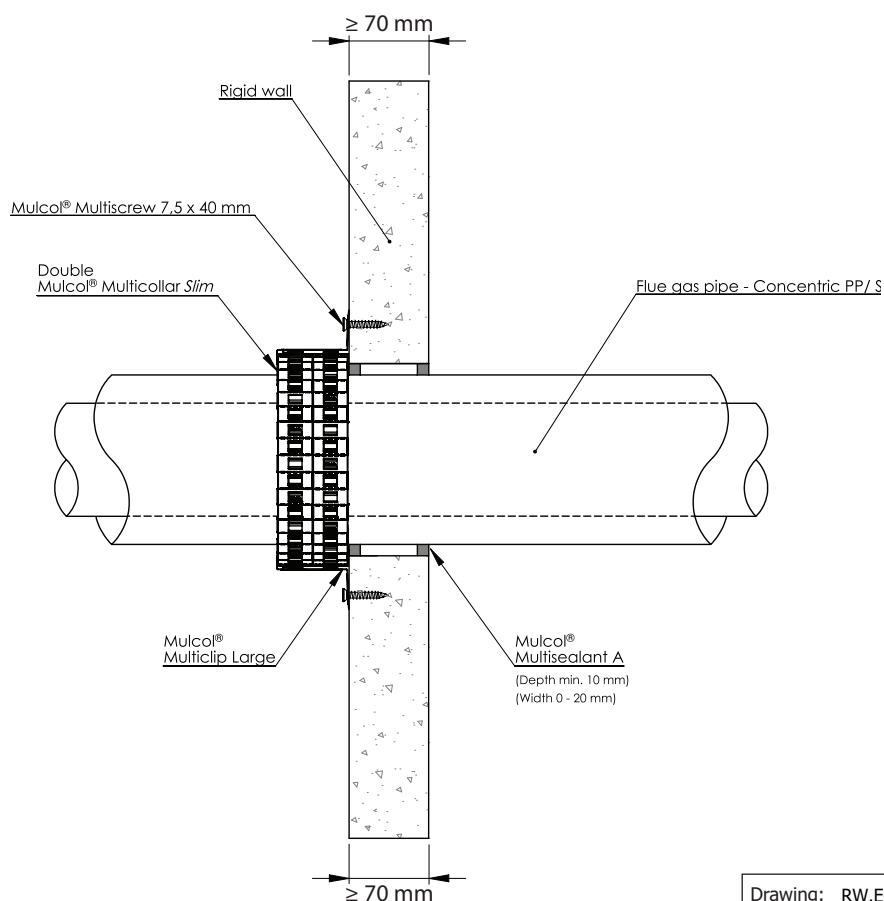
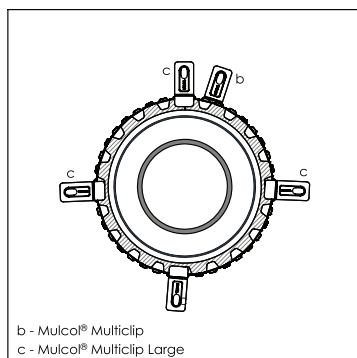


Drawing: RW.E-MC60-RGAT-21.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer pipe dimension	Inner pipe dimension		
Steel / PP flue gas system concentric	$\leq \varnothing 110$	$\leq \varnothing 60$	Multicollar Slim double	E 90 U/C
	$\leq \varnothing 125$	$\leq \varnothing 80$		
	$\leq \varnothing 150$	$\leq \varnothing 100$		
	$\leq \varnothing 200$	$\leq \varnothing 130$		

A.2.1 Directly through wall - ≥ 70 mm - Flue gas pipes

A.2.1.3 Plastic flue gas pipes

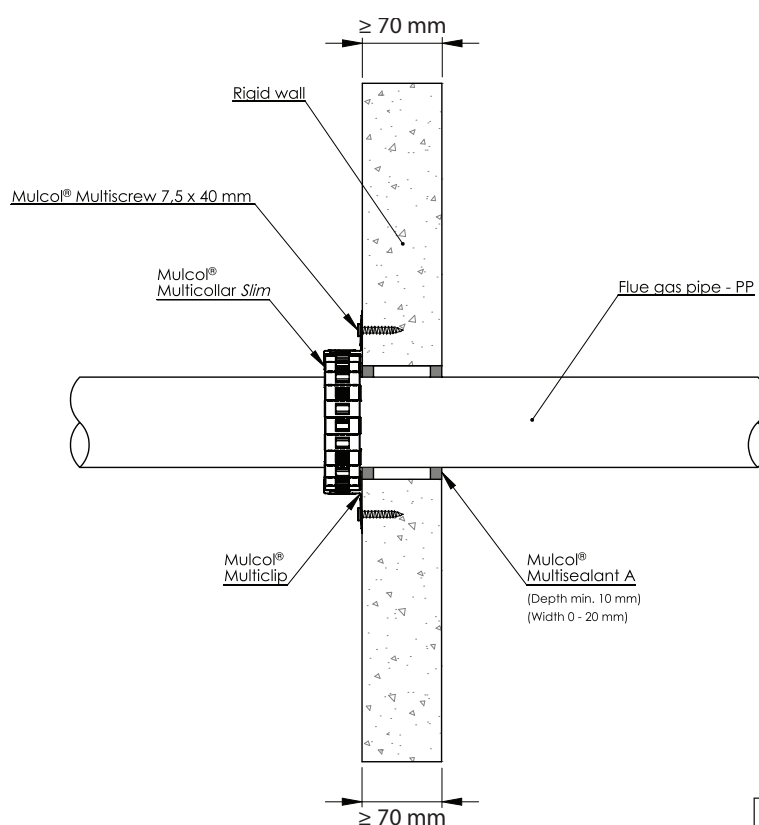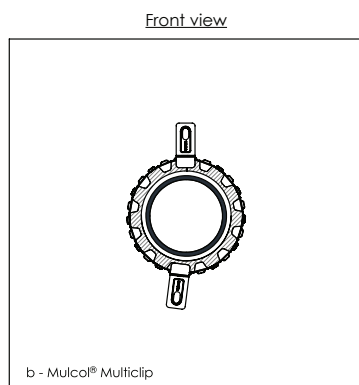



Drawing: RW.E-MC30-RGA_PP-11.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PP	$\leq \varnothing 40$	1.8 - 4.0	Multicollar <i>Slim</i>	EI 90 U/U
	$\leq \varnothing 125$	3.1 - 4.0		

A.2.1 Directly through wall - ≥ 70 mm - Flue gas pipes

A.2.1.4 Concentric plastic flue gas pipes

Front view


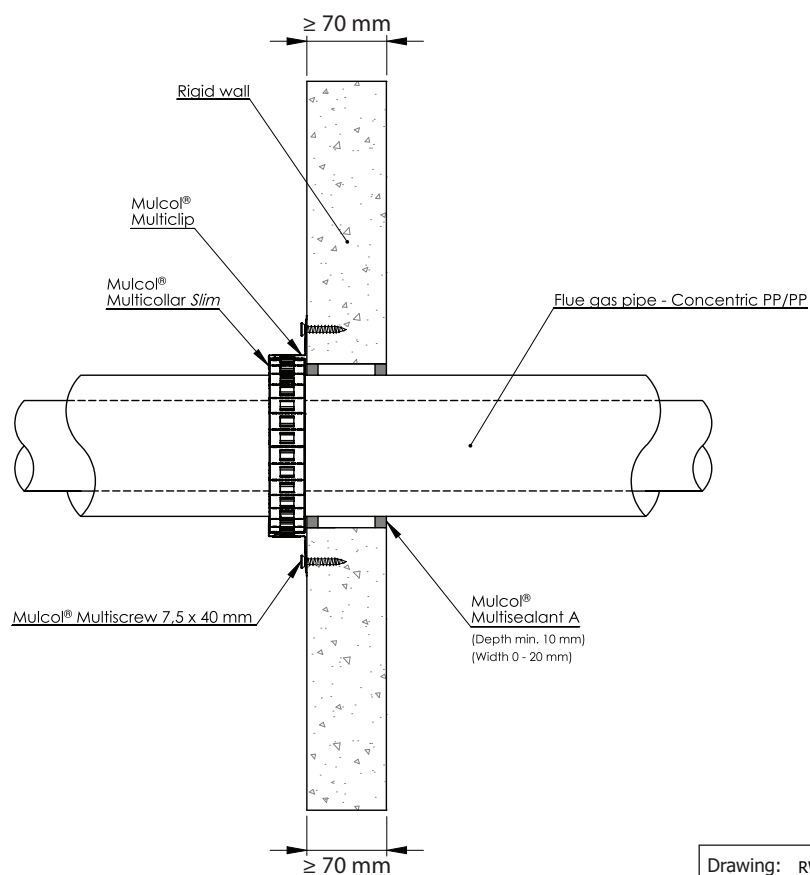
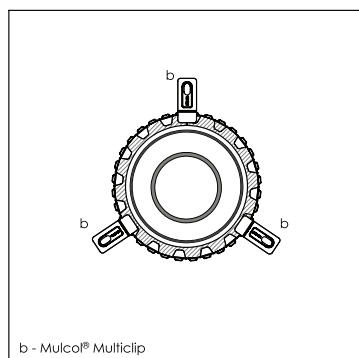


Drawing: RW.E-MC30-RGAT_PP-11.0.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PP / PP	$\leq \varnothing 40$	1.8 - 4.0	Multicollar Slim	EI 90 U/U
	$\leq \varnothing 125$	3.1 - 4.0		

A.3.1 Multimastic FB1 - 2x50 mm - Combustible pipes

A.3.1.1 Plastic pipes

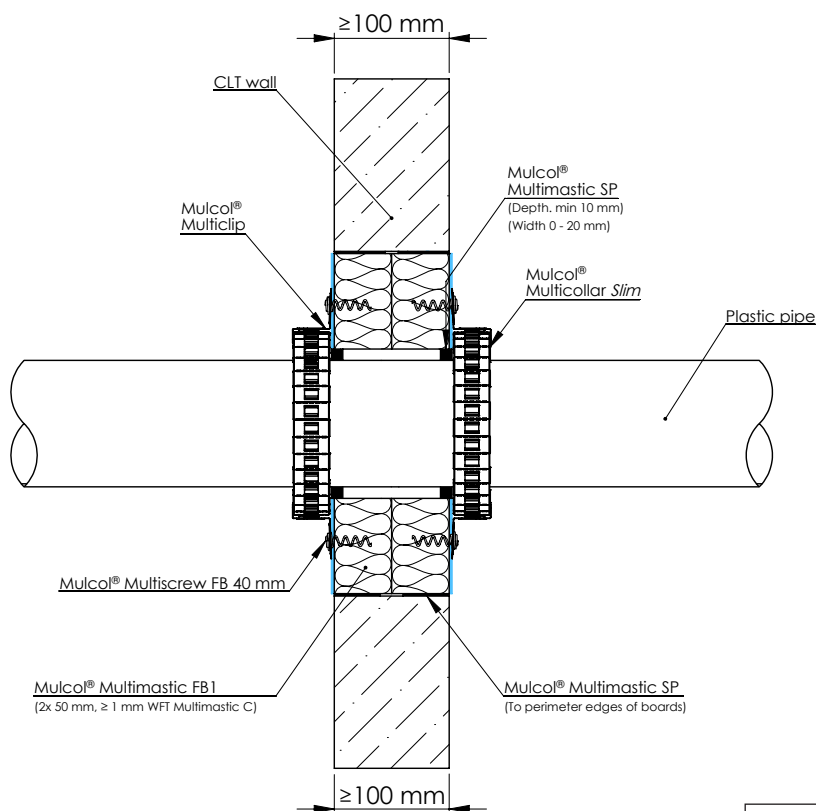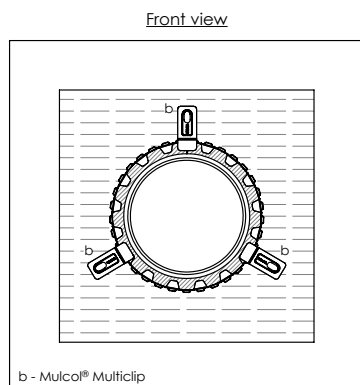

Drawing: WCLT.E-MC30-PP-MFB1.2.10



Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7 - 6.6	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/U
PP		2.7			
PVC(-U/-C)					

A.3.1 Multimastic FB1 - 2x50 mm - Combustible pipes


A.3.1.2 Plastic pipes perpendicular to 45°

Front view

a - Annular space
(Maximum 15 mm between pipe and Mulcol® Multicollar Slim)
b - Mulcol® Multiclip



Position seal:
right, left or anywhere
in between

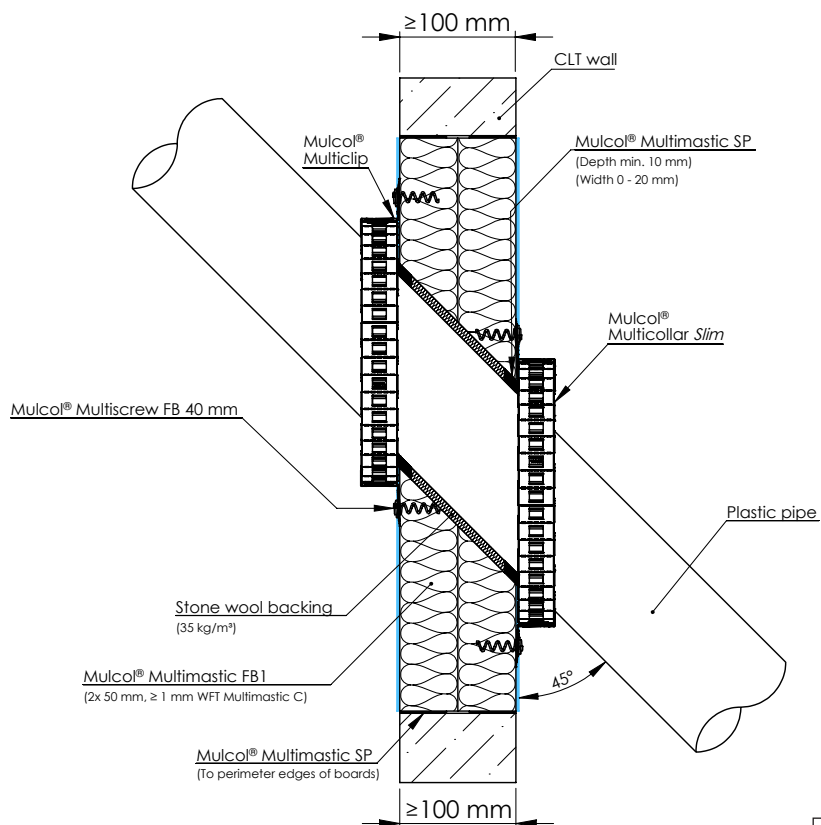

Drawing: WCLT.E-MC30-PP-MFB1-10.1.10



Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/C
PP					
PVC(-U/-C)					

A.3.1 Multimastic FB1 - 2x50 mm - Combustible pipes


A.3.1.3 Plastic pipes perpendicular to 45° - double Multicollar *Slim*

Front view

- a - Annular space
(Maximum 15 mm between pipe and Mulcol® Multicollar Slim)
b - Mulcol® Multiclip
c - Mulcol® Multiclip Large



Position seal:
right, left or anywhere
in between



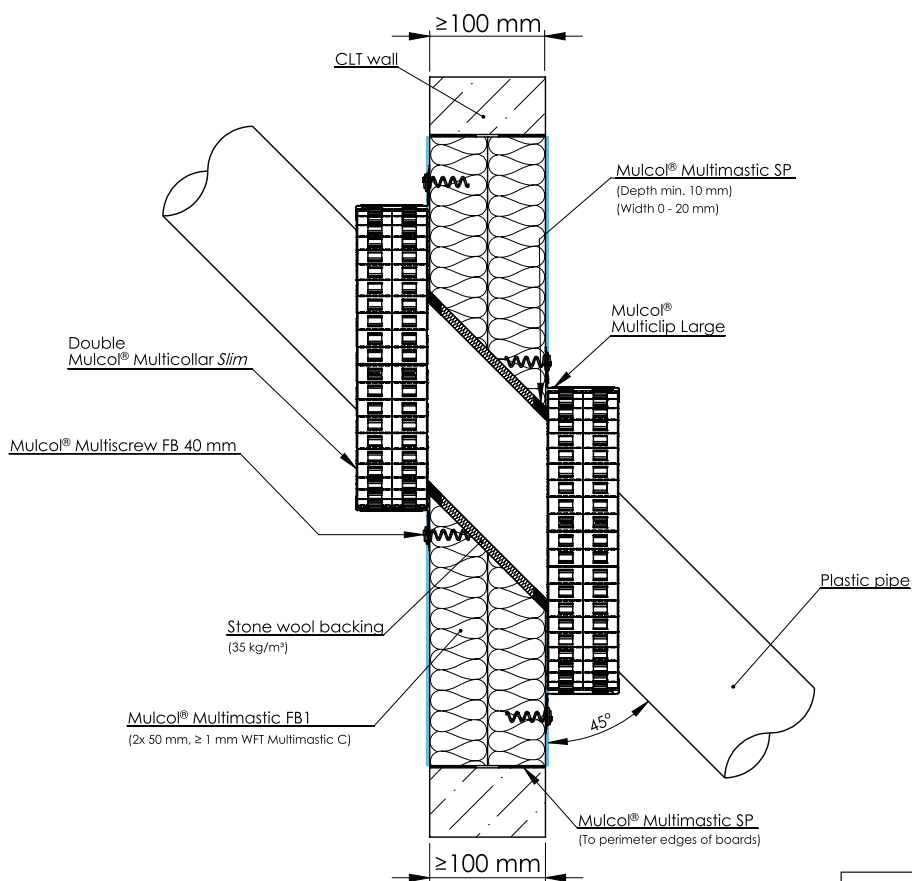


Drawing: WCLT.E-MC60-PP-MFB1-20.1.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7	Multicollar <i>Slim</i> Double	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/U
		2.7 - 10.0			EI 90 U/C
PP		2.7			EI 30 U/U
		3.4			EI 90 U/C
		3.4 - 10.0			EI 60 U/C
PVC(-U/-C)		2.7			EI 30 U/U
		3.4			EI 90 U/C
		3.4 - 10.0			EI 60 U/C

A.3.1 Multimastic FB1 - 2x50 mm - Combustible pipes

A.3.1.4 PP-R multilayer pipes

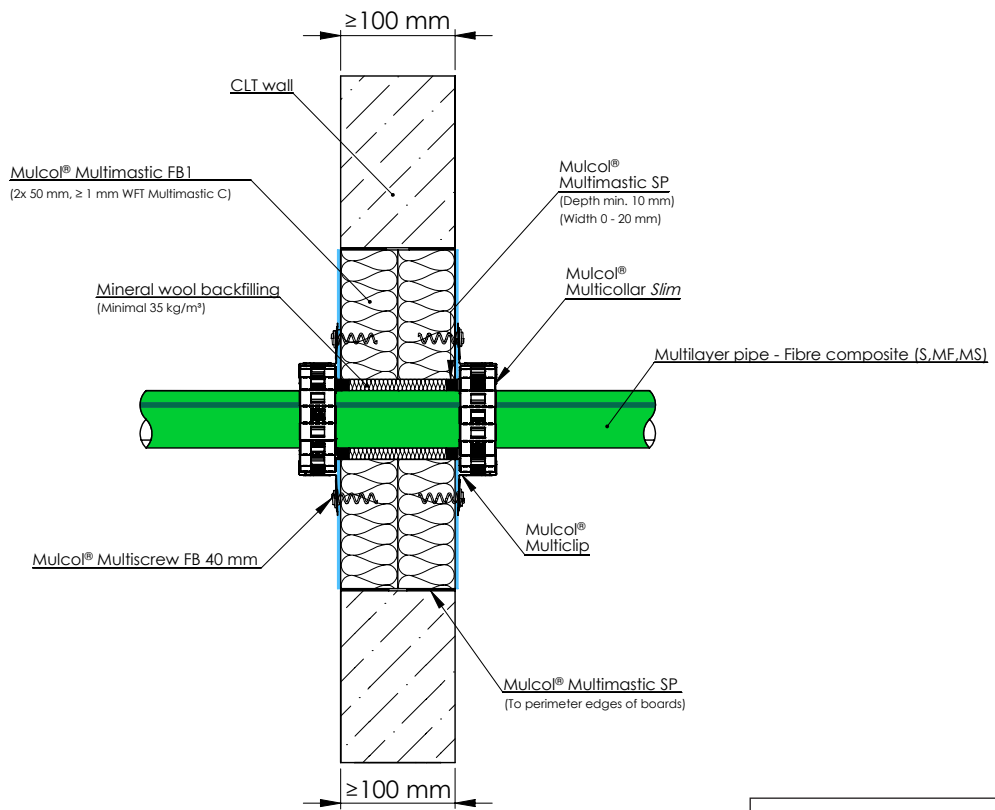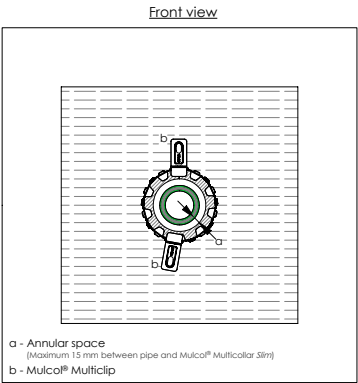


Drawing: WCLT.E-MC30-MLF-MFB1.2.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Aquatherm Green	$\leq \varnothing 50$	6.9	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/C

A.3.1 Multimastic FB1 - 2x50 mm - Combustible pipes


A.3.1.5 Drinks tubing system

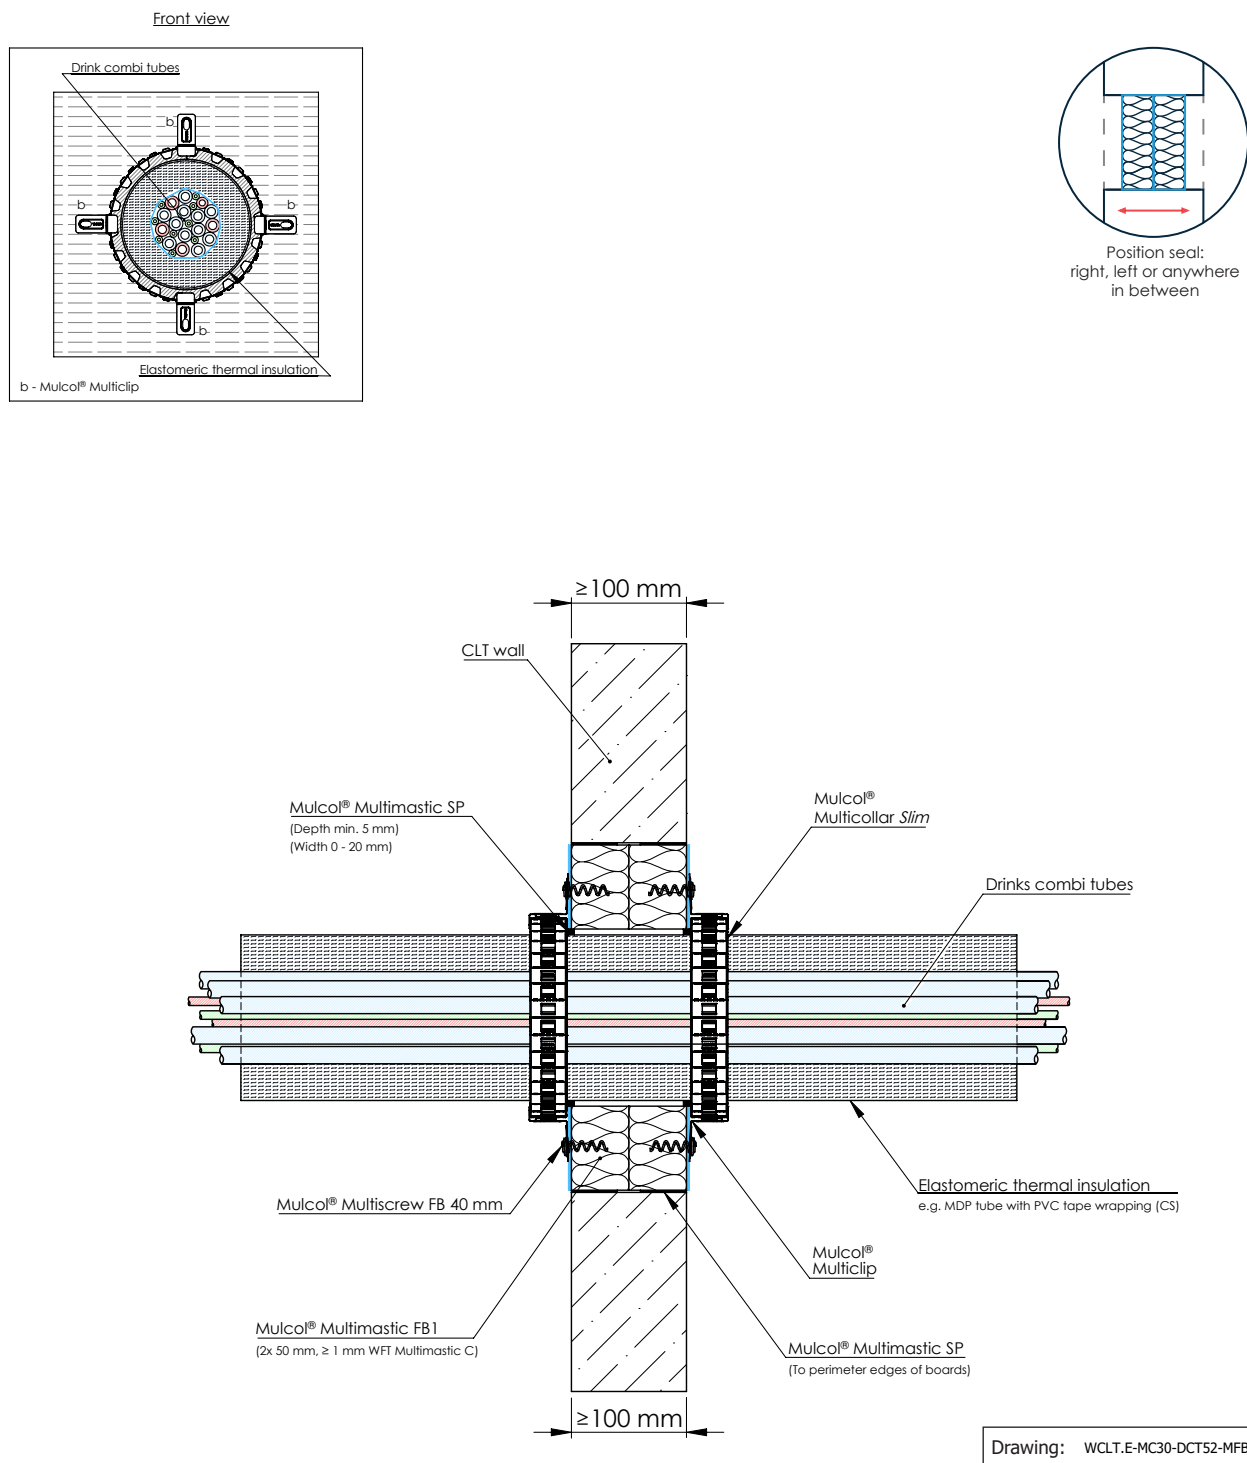

Services	Dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimension	Hoses no.	Type	Thickness (mm)	Configuration			
Drinks tubing system	≤ Ø 145	≤ 52	Elastomeric foam	8 - 35	CS	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 60 U/C

A.3.2.1 Multiple PVC conduits



A diagram of a Mulcot® Multiclip. It consists of a circular base with a scalloped outer edge. Inside the base, there are several small circular elements, some of which are yellow. Two clips, labeled 'b', are attached to the top and bottom of the base. The entire assembly is shown within a square frame.

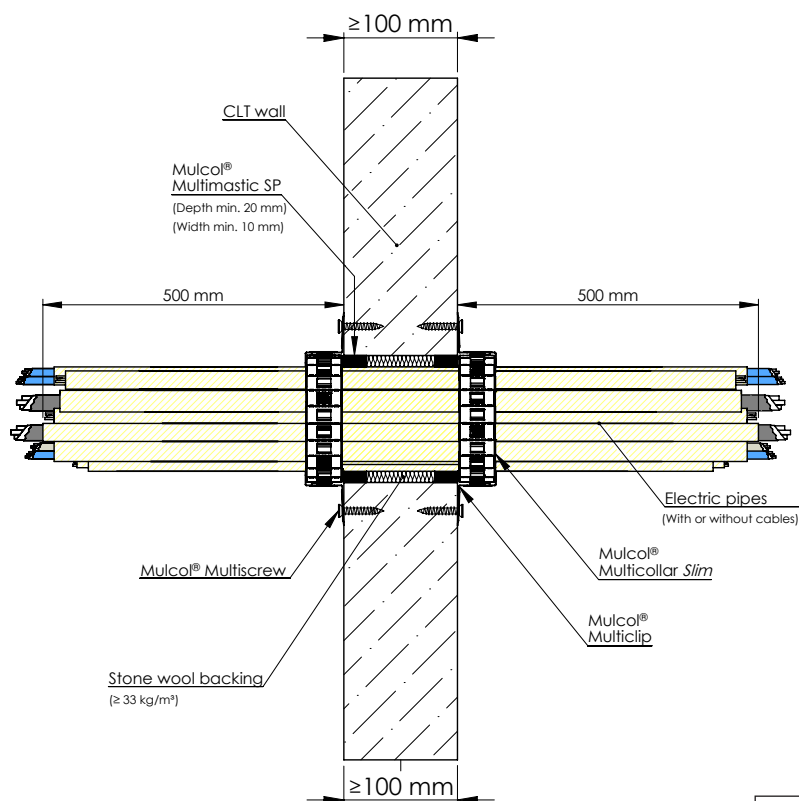

Services	Length of conduit	Product	Allowed cables	Classification
Multiple PVC conduits max. $\leq \varnothing 80$ mm, max. $\leq \varnothing 19$ mm each with or without cables	≥ 500 mm	Multicollar <i>Slim</i>	Sheathed cables $\leq \varnothing 10.2$ mm Unsheathed cables $\leq \varnothing 5$ mm	EI 90 U/U

A.3.2 Directly through wall - ≥ 100 mm - Cables, trays and conduits

A.3.2.2 Flexible conduit with cables

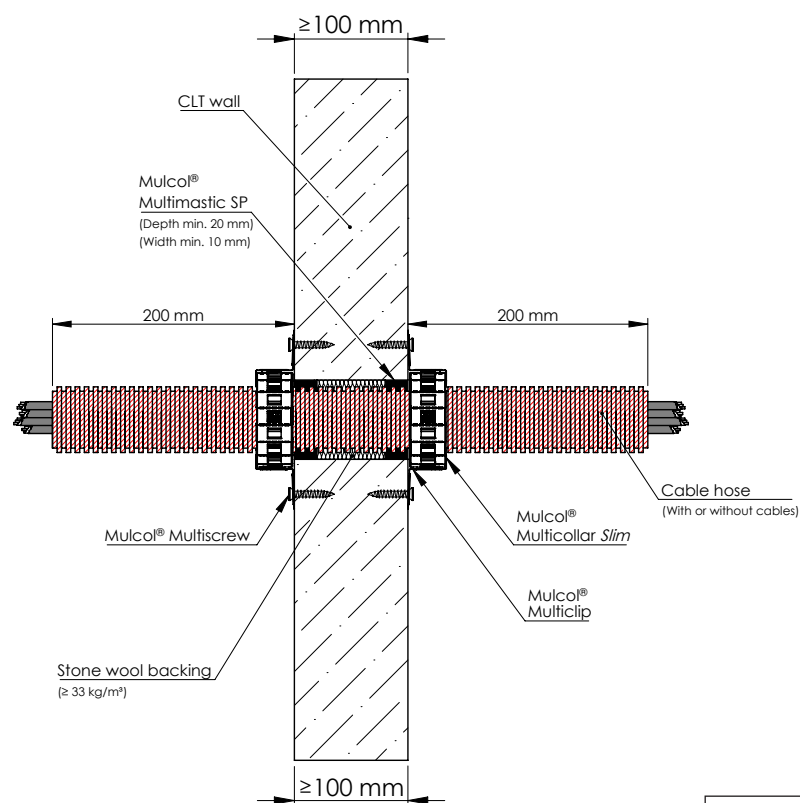
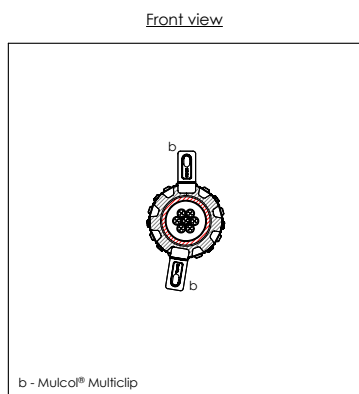


Drawing: WCLT.E-MC30-ECH-10.0.30

Services	Length of conduit	Product	Allowed cables	Classification
Ribbed PE-sleeve conduit $\leq \varnothing 63$ mm, with or without cables	≥ 200 mm	Multicollar Slim	Sheathed cables $\leq \varnothing 60$ mm (single or bundled) Telecommunication cables $\leq \varnothing 21$ mm in a tied bundle $\leq \varnothing 60$ mm	EI 90 U/U

A.3.3 Directly through wall - ≥ 100 mm - Combustible pipes

A.3.3.1 Plastic pipes

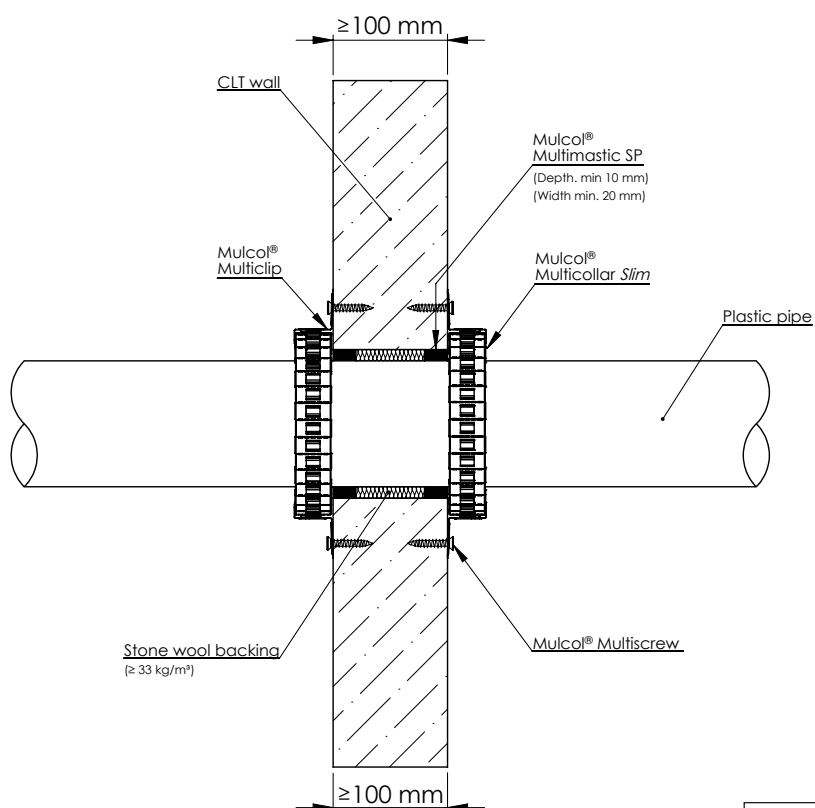
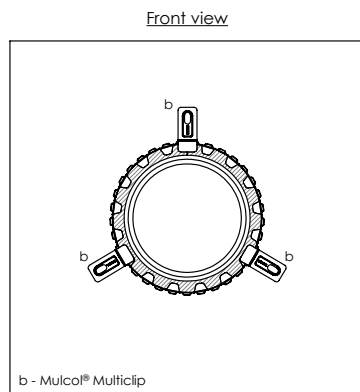


Drawing: WCLT.E-MC30-PP-10.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	$\leq \varnothing 40$	2.3 - 10.0	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 60 U/U
	$\leq \varnothing 110$	2.7 - 10.0			EI 90 U/U
	$\leq \varnothing 125$	2.7			EI 90 U/C
PP	$\leq \varnothing 40$	3.9			EI 90 U/U
	$\leq \varnothing 40$	2.3			EI 60 U/U
	$\leq \varnothing 110$	2.3 - 10.0			EI 90 U/U
	$\leq \varnothing 110$	2.7			EI 90 U/C
PVC(-U/-C)	$\leq \varnothing 125$	3.1			EI 60 U/U
	$\leq \varnothing 40$	2.3 - 10.0			EI 90 U/U
	$\leq \varnothing 110$	2.7 - 10.0			EI 60 U/U
	$\leq \varnothing 110$	3.2 - 8.1			EI 90 U/U

A.4.1 Directly through wall - ≥ 100 mm - Cables, trays and conduits

A.4.1.1 Flexible conduit with cable


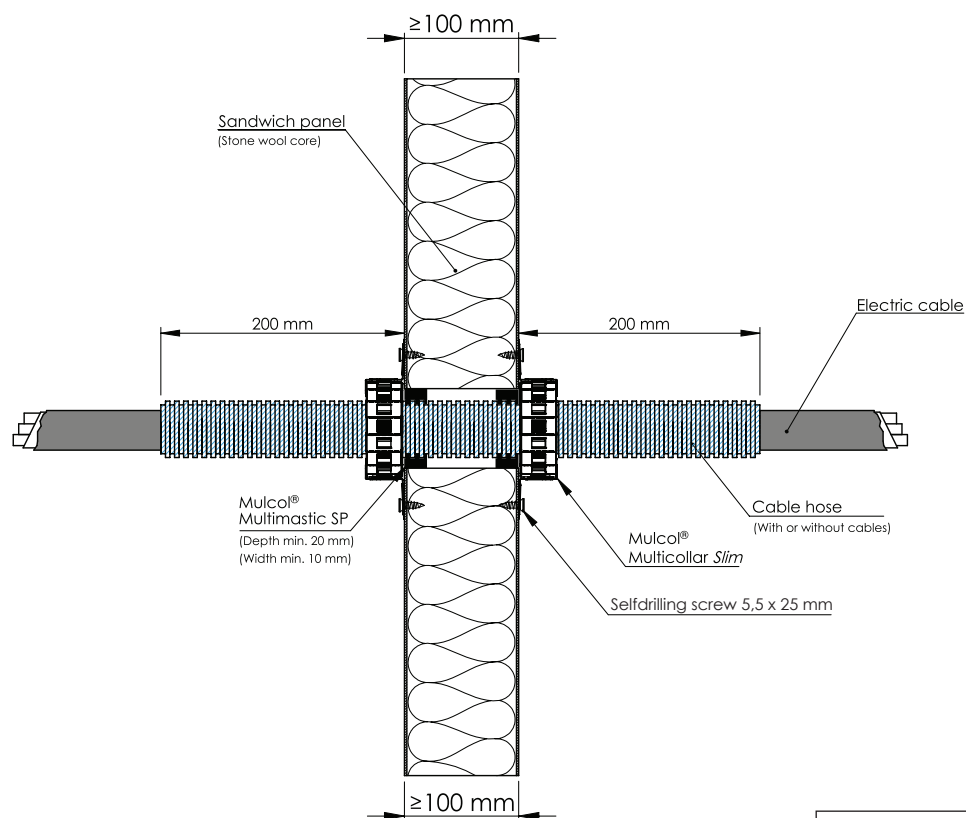
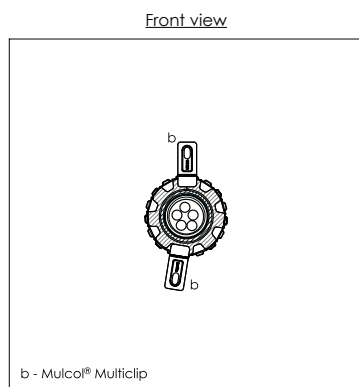


Drawing: SW.E-MC30-ECH-10.0.30

Services	Length of conduit	Product	Allowed cables	Classification
Ribbed PE-sleeve conduit $\leq \varnothing 40$ mm, with or without cable	≥ 200 mm	Multicollar <i>Slim</i>	Sheathed cables $\leq \varnothing 28$ mm	EI 90 U/C

A.4.2 Multimastic FB1 - 2x 50 mm - Combustible pipes

A.4.2.1 Plastic pipes

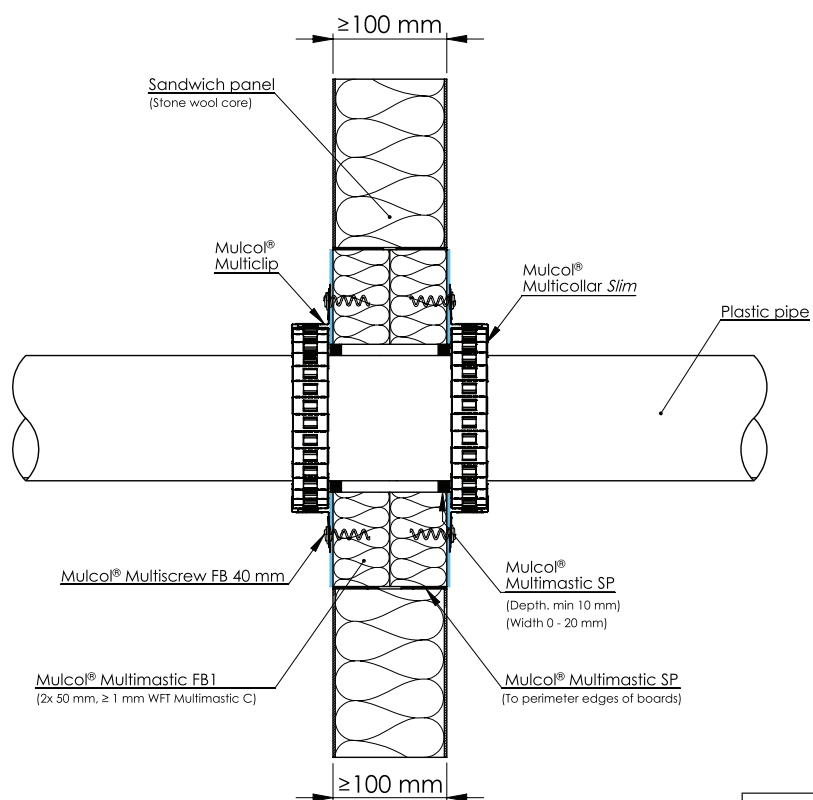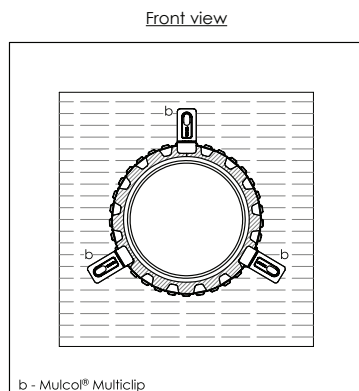

Drawing: SW.E-MC30-PP-MFB1.2.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 40	2.3 - 9.3	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 60 U/U
	≤ Ø 110	2.7 - 6.6			EI 120 U/U
		6.6 - 9.3			EI 60 U/U
	≤ Ø 125	3.1 - 9.3			EI 60 U/C
	≤ Ø 160	4.0 - 9.5			

A.4.2 Multimastic FB1 - 2x 50 mm - Combustible pipes




A.4.2.1 Plastic pipes

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PP	≤ Ø 40	2.3 - 9.3	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 60 U/U
	≤ Ø 110	2.7			EI 120 U/U
		2.7 - 9.3			EI 60 U/U
	≤ Ø 125	3.1 - 9.3			EI 60 U/C
	≤ Ø 160	4.0 - 9.1			

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PVC(-U/-C)	≤ Ø 40	2.3 - 9.3	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 60 U/U
	≤ Ø 110	2.7			EI 120 U/U
		2.7 - 9.3			EI 60 U/U
	≤ Ø 125	3.1 - 9.3			EI 60 U/C
	≤ Ø 160	4.0 - 9.1			

A.4.2 Multimastic FB1 - 2x 50 mm - Combustible pipes

A.4.2.2 Plastic pipes perpendicular to 45°

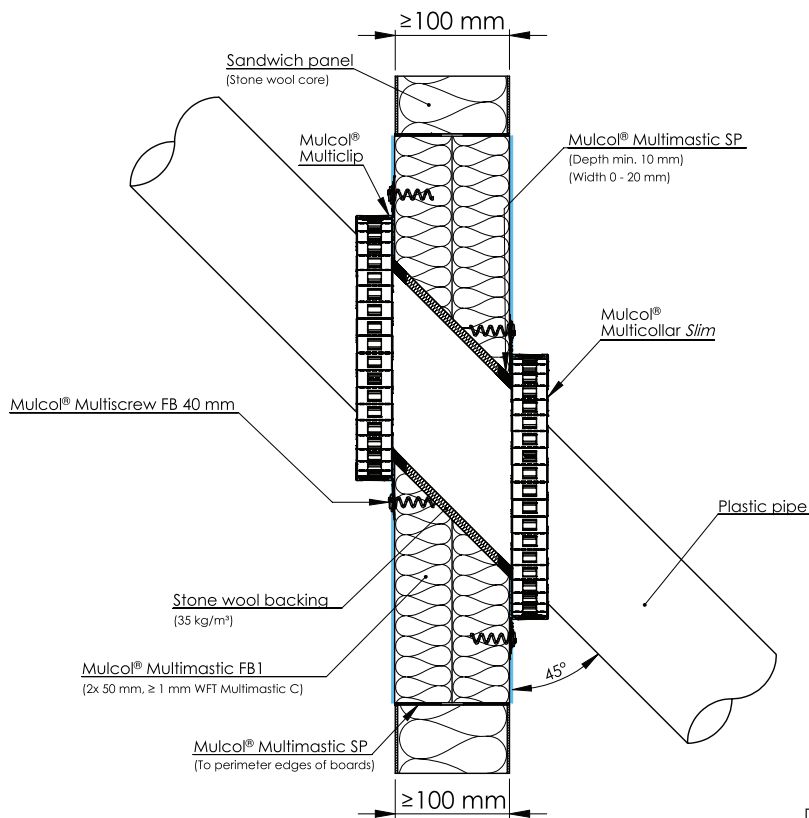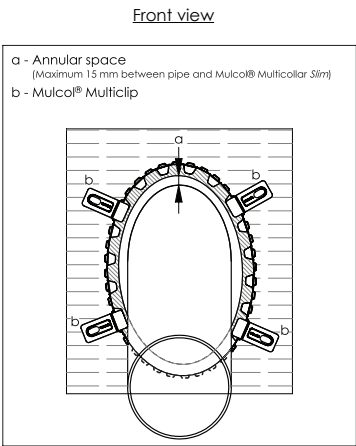

Drawing: SW.E-MC30-PP-MFB1-10.1.10



Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/C
PP					
PVC(-U/-C)					

A.4.2 Multimastic FB1 - 2x 50 mm - Combustible pipes


A.4.2.3 Plastic pipes perpendicular to 45° - double Multicollar *Slim*

Front view

- a - Annular space
(Maximum 15 mm between pipe and Mulcol® Multicollar Slim)
b - Mulcol® Multiclip
c - Mulcol® Multiclip Large



Position seal:
right, left or anywhere
in between



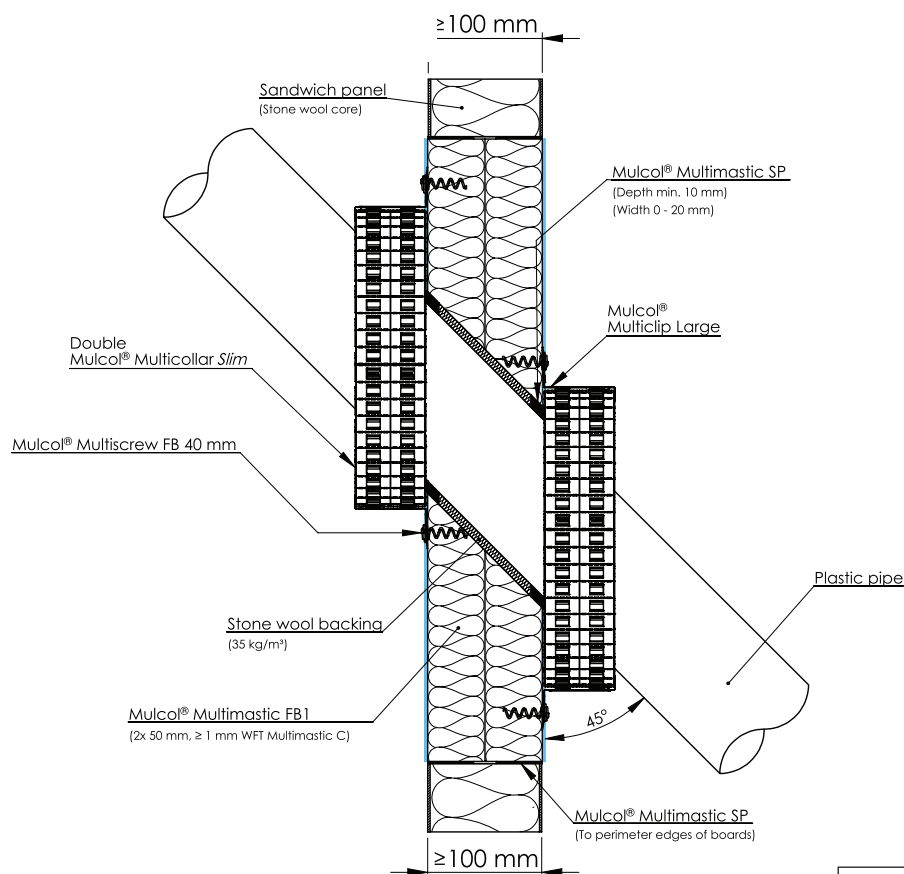


Drawing: SW.E-MC60-PP-MFB1-20.1.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7	Multicollar <i>Slim</i> double	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/U
		3.4 - 10.0			EI 120 U/C
PP		2.7			EI 30 U/U
		3.4			EI 120 U/C
		3.4 - 10.0			EI 60 U/C
PVC(-U/-C)		2.7			EI 30 U/U
		3.4			EI 120 U/C
		3.4 - 10.0			EI 60 U/C

A.4.2 Multimastic FB1 - 2x 50 mm - Combustible pipes



A.4.2.4 Plastic pipes (Silent)

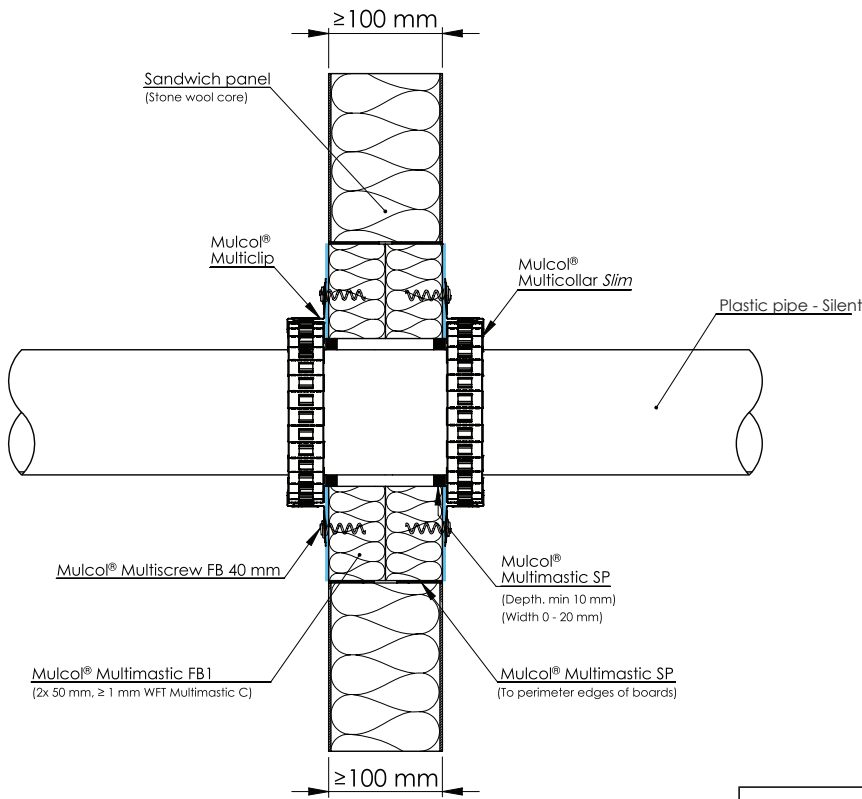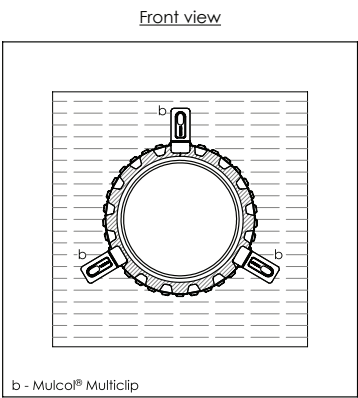

Drawing: SW.E-MC30-PPS-MFB1.2.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB20	≤ Ø 110	6.0	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 60 U/U


A.4.2.5 PP-R multilayer pipes

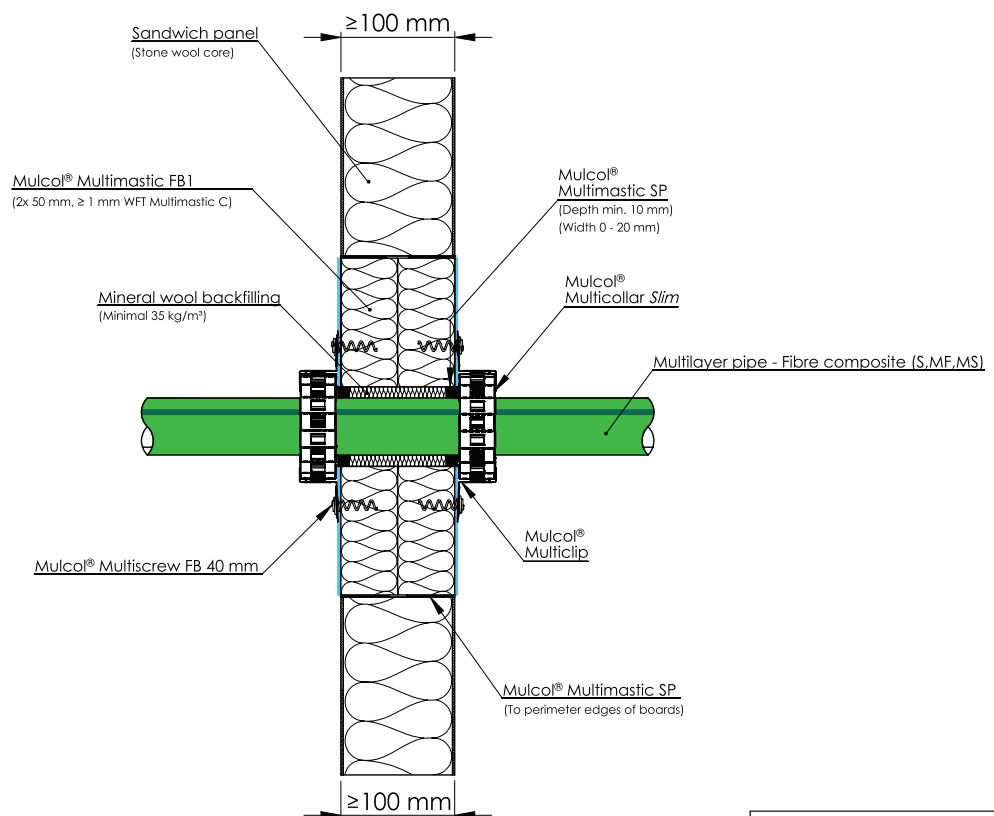

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Aquatherm Green	≤ Ø 50	6.9	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxxd)	EI 120 U/C



A.4.2 Multimastic FB1 - 2x 50 mm - Combustible pipes

A.4.2.6 Drinks tubing system

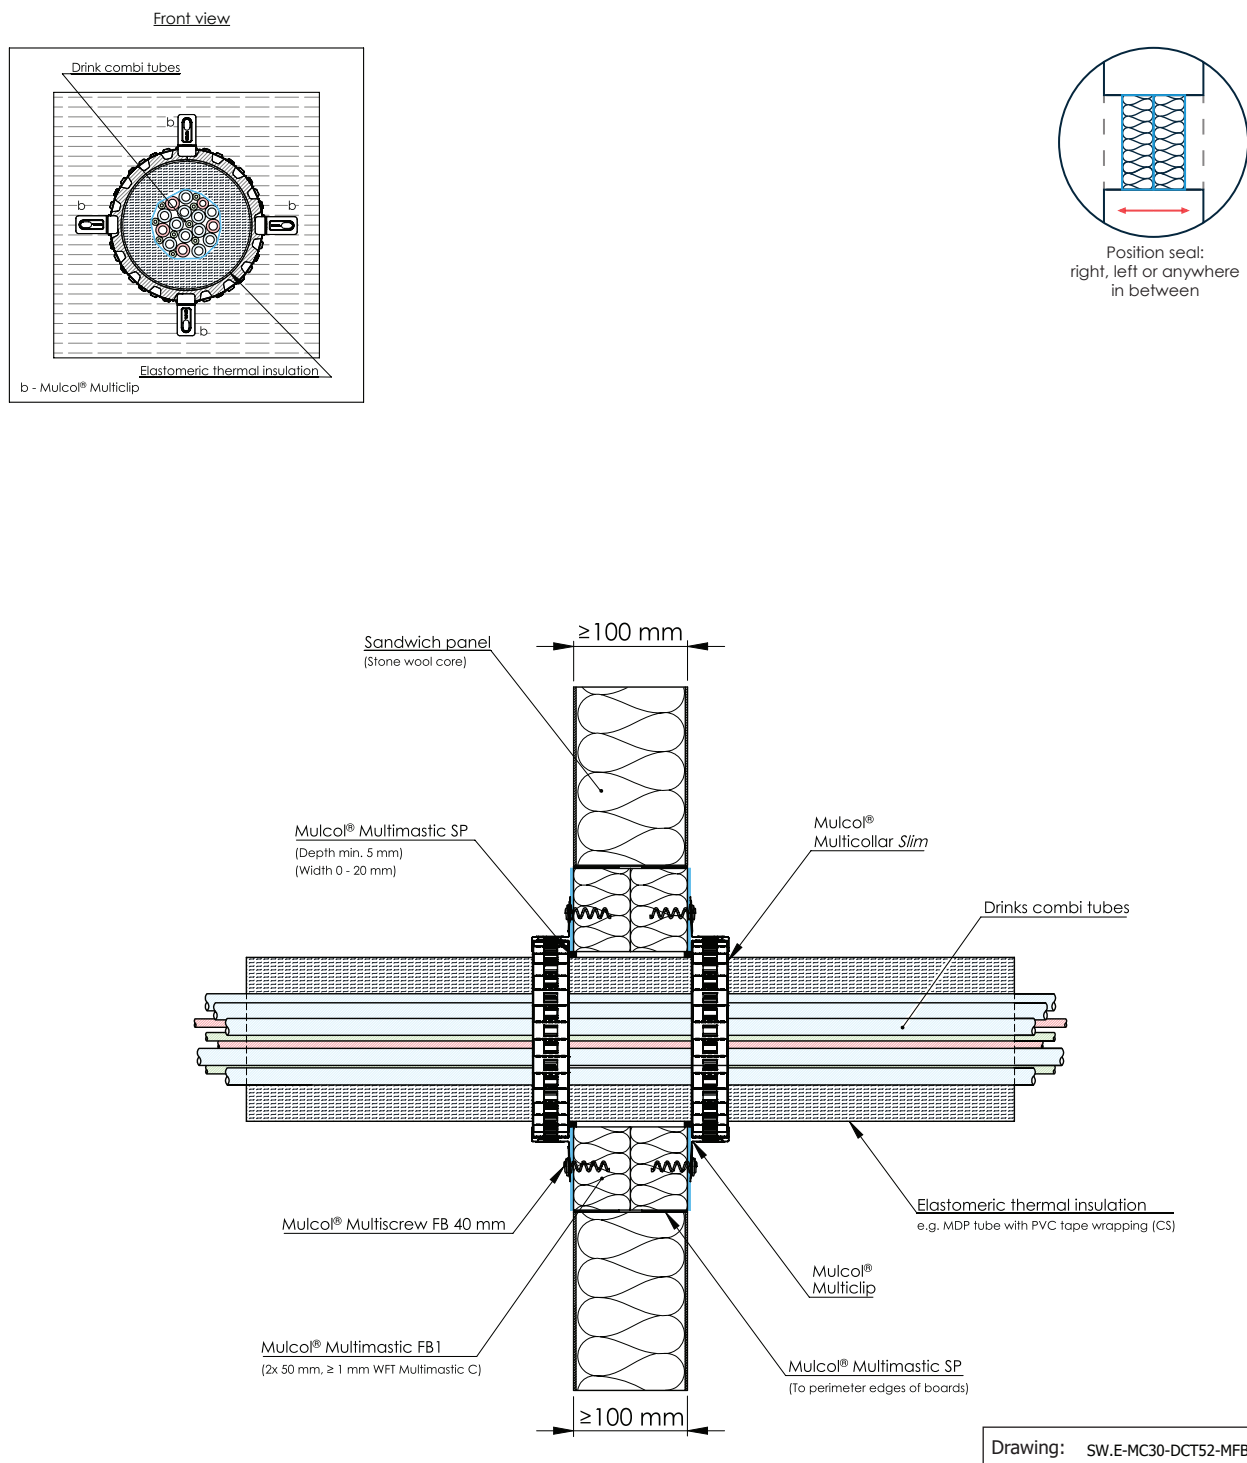

Services	Dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimension	Hoses no.	Type	Thickness (mm)	Configuration			
Drinks tubing system	$\leq \varnothing 145$	≤ 52	Elastomeric foam	8 - 35	CS	Multicollar Slim	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 60 U/C




A.4.2.7 PE Pipe insulated PIR

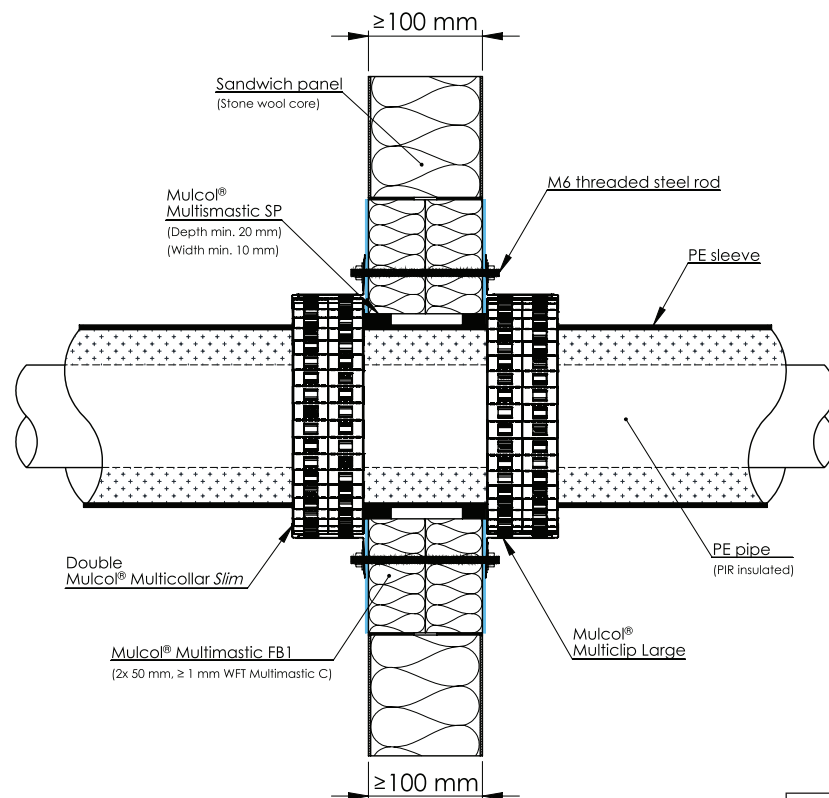

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
PE	≤ Ø 160	≥ 3.5	PIR / PUR + PE coating	30	CS	Multicollar <i>Slim</i>	EI 120 U/C

A.4.3 Multimastic FB1 Pattress fixed to wall - 2x50 mm - Combustible pipes

A.4.3.1 Plastic pipes

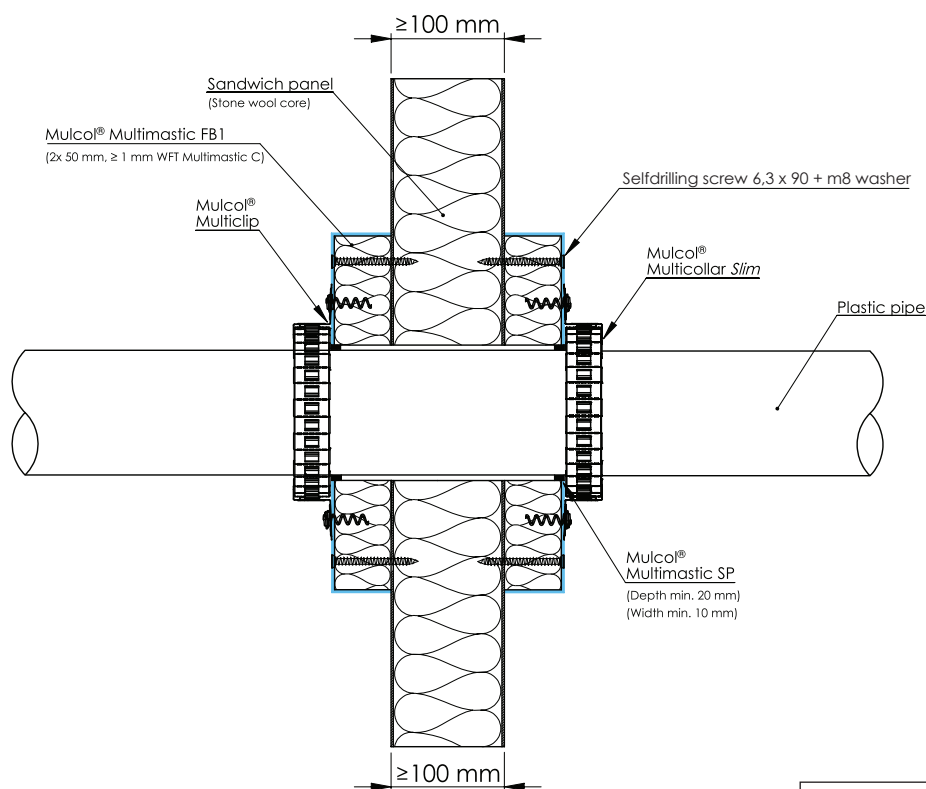
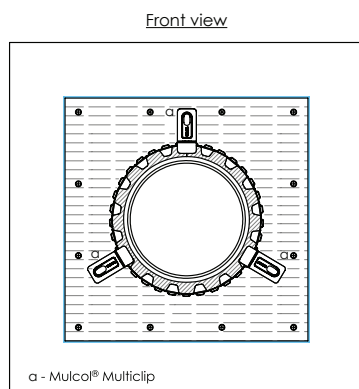


Drawing: SW.E-MC30-PP-MFB1.2.10_pat

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 40	2.4	Multicollor Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 30 U/U, E 90 U/U
	≤ Ø 110	3.4			EI 90 U/U
PP	≤ Ø 40	2.3 - 2.7			
	≤ Ø 110	2.7			EI 30 U/U, E 90 U/U
PVC(-U/-C)	≤ Ø 40	2.4			EI 90 U/U
	≤ Ø 110	3.4			

A.4.4 Directly through wall - ≥ 100 mm - Combustible pipes

A.4.4.1 Plastic pipes - Multicollar *Slim* fixed with screws

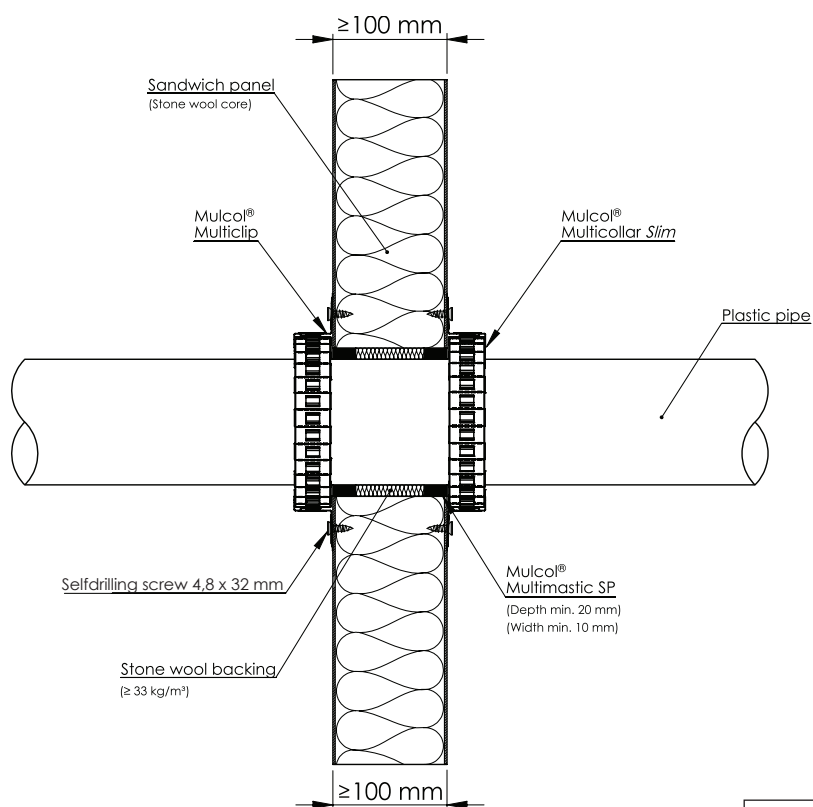
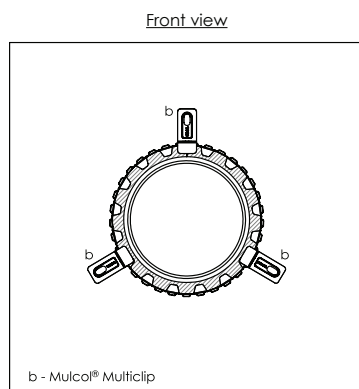


Drawing: SW.E-MC30-PP-10.0.10_S

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	$\leq \varnothing 40$	2.4	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/U
	$\leq \varnothing 110$	3.4			EI 45 U/U, E 90 U/U
PP	$\leq \varnothing 40$	2.3			EI 90 U/U
	$\leq \varnothing 110$	2.7			EI 45 U/U, E 90 U/U
PVC(-U/-C)	$\leq \varnothing 40$	2.4			EI 90 U/U
	$\leq \varnothing 110$	3.4			EI 45 U/U, E 90 U/U

A.4.4 Directly through wall - ≥ 100 mm - Combustible pipes

A.4.4.2 Plastic pipes - Multicollar *Slim* fixed with bolts

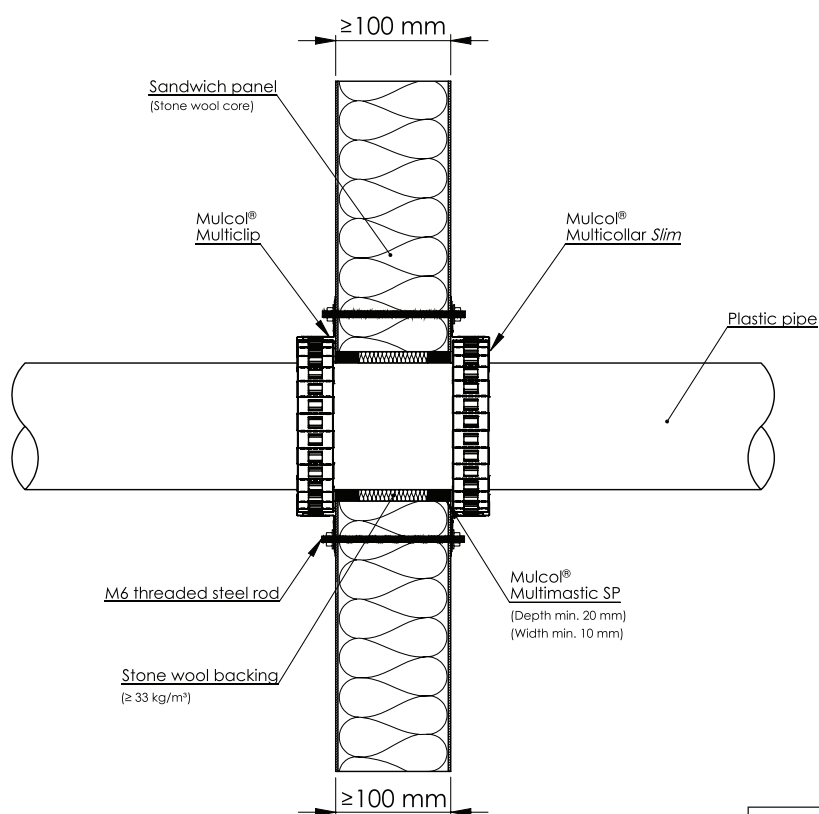
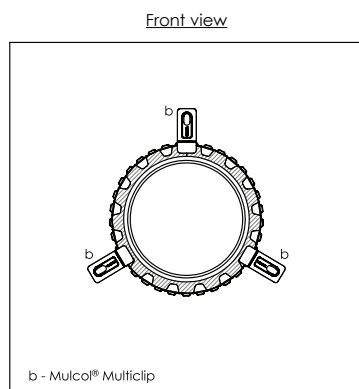


Drawing: SW.E-MC30-PP-10.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	$\leq \varnothing 40$	2.4	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U
	$\leq \varnothing 125$	3.1			EI 120 U/C
PP	$\leq \varnothing 40$	2.3			EI 120 U/U
PVC(-U/-C)	$\leq \varnothing 40$	2.4			

A.4.4 Directly through wall - ≥ 100 mm - Combustible pipes

A.4.4.3 Plastic pipes - double Multicollar *Slim*

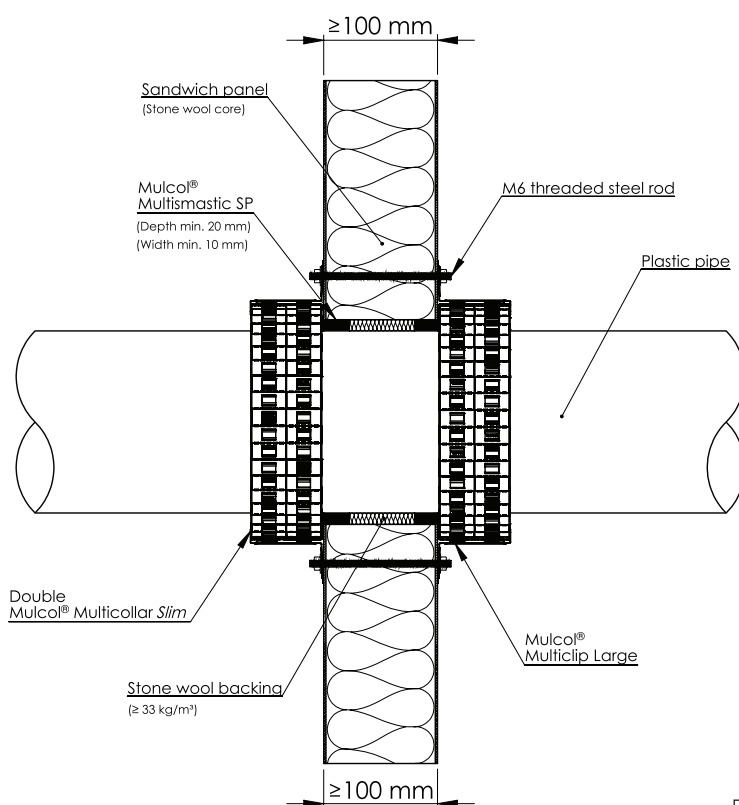
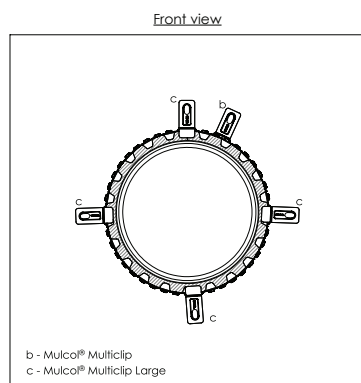


Drawing: SW.E-MC60-PP-10.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	$\leq \varnothing 160$	4.9	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/C

A.4.4 Directly through wall - ≥ 100 mm - Combustible pipes

A.4.4.4 Plastic pipes - Elastomer LS 400 / CS

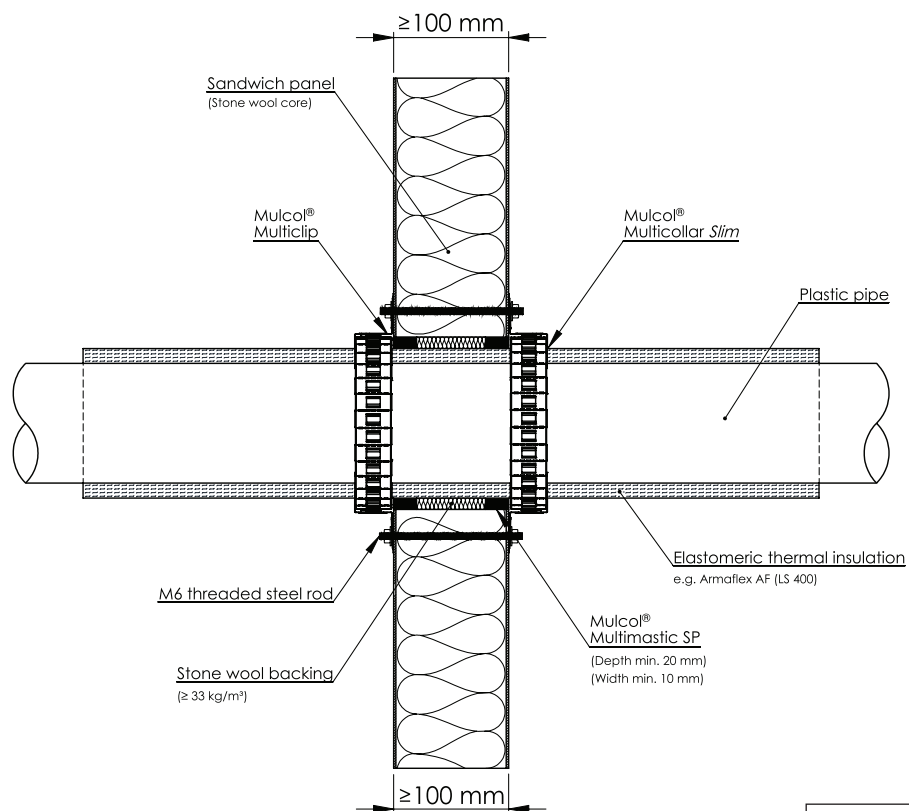
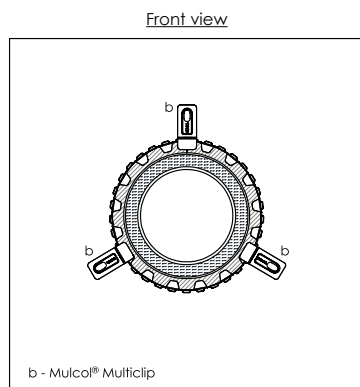


Drawing: SW.E-MC30-PP-10.0.22

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
PE(-HD) / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	2.7	ArmaFlex AF (min. class B _L -s3, d0 B-s3, d0)	14.5	LS 400 / CS	Multicollar <i>Slim</i>	EI 120 U/U

A.4.4 Multimastic FB1 - 2x 50 mm - Combustible pipes

A.4.4.5 PE Pipe insulated PIR

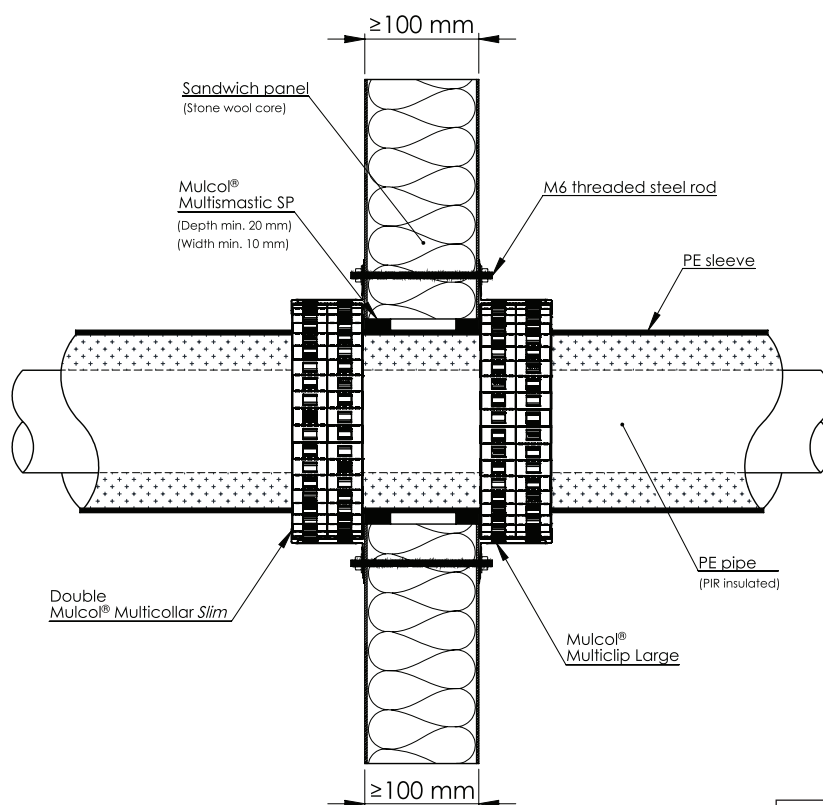
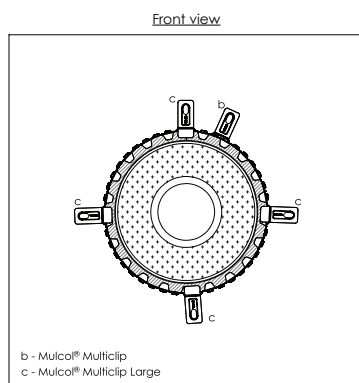


Drawing: SW.E-MC60-PP_pr-10.0.23

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
PE	≤ Ø 160	≥ 3.5	PIR / PUR + PE coating	30	CS	Multicollar Slim	EI 120 C/U

A.4.5 Multimastic FB1 Pattress fixed to wall - 2x50 mm - Multilayer pipe (MLC)

A.4.5.1 Multilayer pipe (MLC) - Elastomer LS 400 / CS

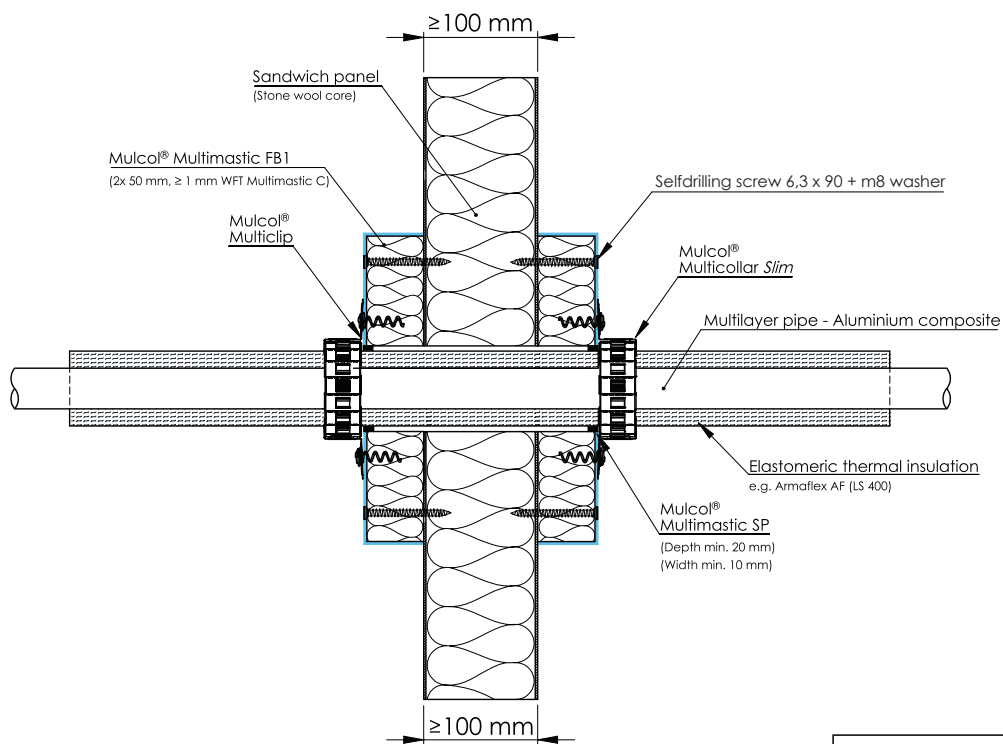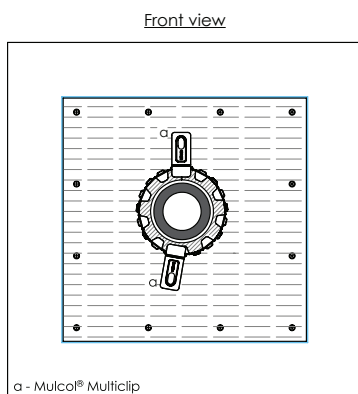



Drawing: SW.E-MC30-MLA-MFB1.2.10_pat

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	≤ Ø 32	3.0	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	13	LS 400 / CS	Multicollar Slim	EI 90 U/C

B.1.1 Directly through floor - Cables, trays and conduits

B.1.1.1 Cable bundle

Bottom view

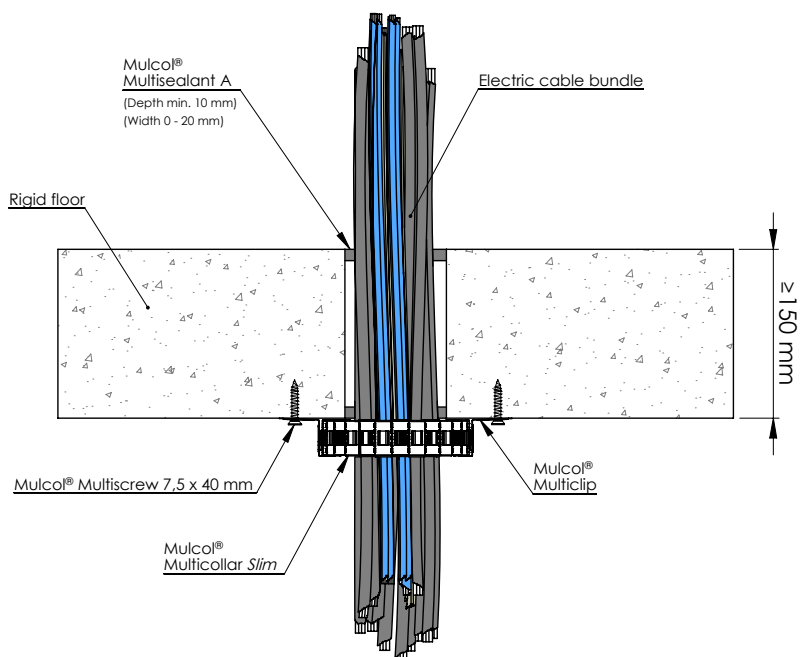
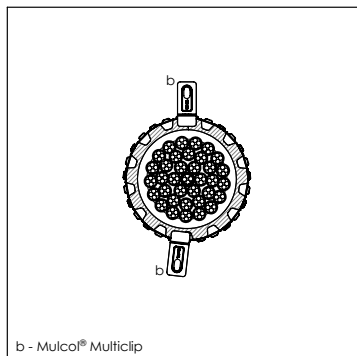


Drawing: RF.E-MC30-ECB-11.0.10

Services	Product	Aperture (mm)	Sealing (mm)	Classification
Multiple electrical / telecommunication cables max. 42 pcs.	Multicollor Slim	≤ Ø 80	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120

B.1.1 Directly through floor - Cables, trays and conduits

B.1.1.2 Multiple PVC conduits

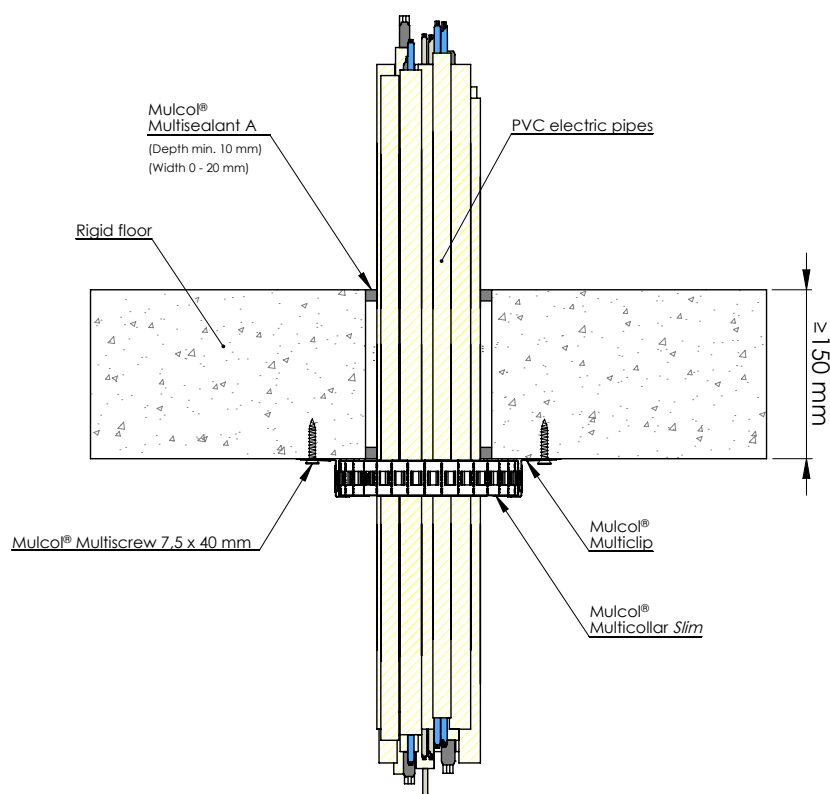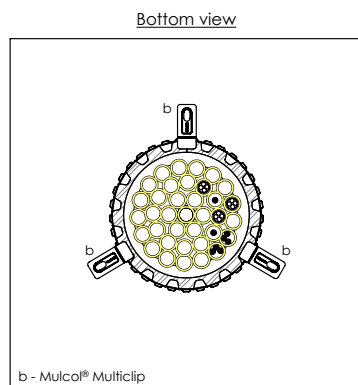



Drawing: RF.E-MC30-EPB-11.0.10

Services	Product	Aperture (mm)	Sealing (mm)	Classification
Multiple PVC conduits max. 18 pcs., max. $\leq \varnothing 25$ mm with or without cables	Multicollar Slim	$\leq \varnothing 100$	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U

B.1.1 Directly through floor - Cables, trays and conduits

B.1.1.3 Multiple flexible conduits with cables

Bottom view


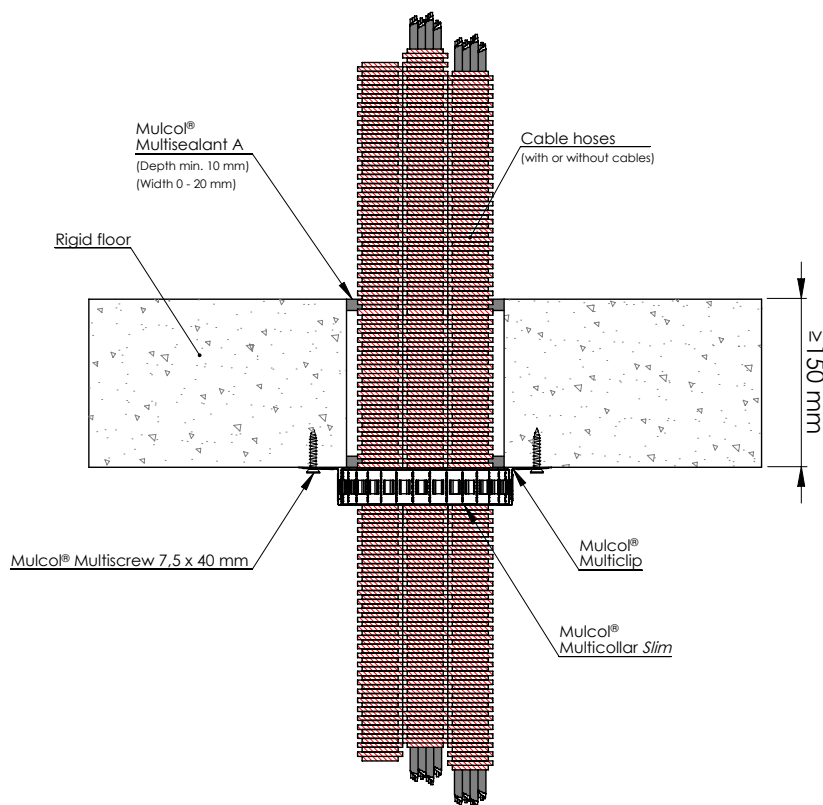
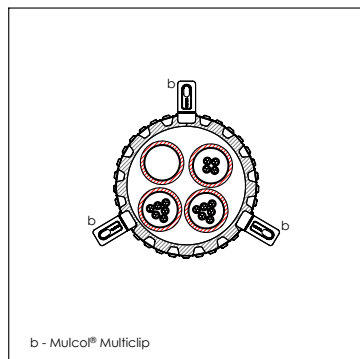


Drawing: RF.E-MC30-ECHB-11.0.30

Services	Number of sleeves	Product	Allowed cables	Classification
Ribbed PE-sleeve conduit ≤ Ø 50 mm, with or without cables	≤ 5	Multicollar Slim	Sheathed cables ≤ Ø 21 mm (single or bundled) Telecommunication cables	EI 60 U/U

B.1.2 Multimastic FB1 - 2x50 mm no cavity - Combustible pipes

B.1.2.1 Plastic pipes

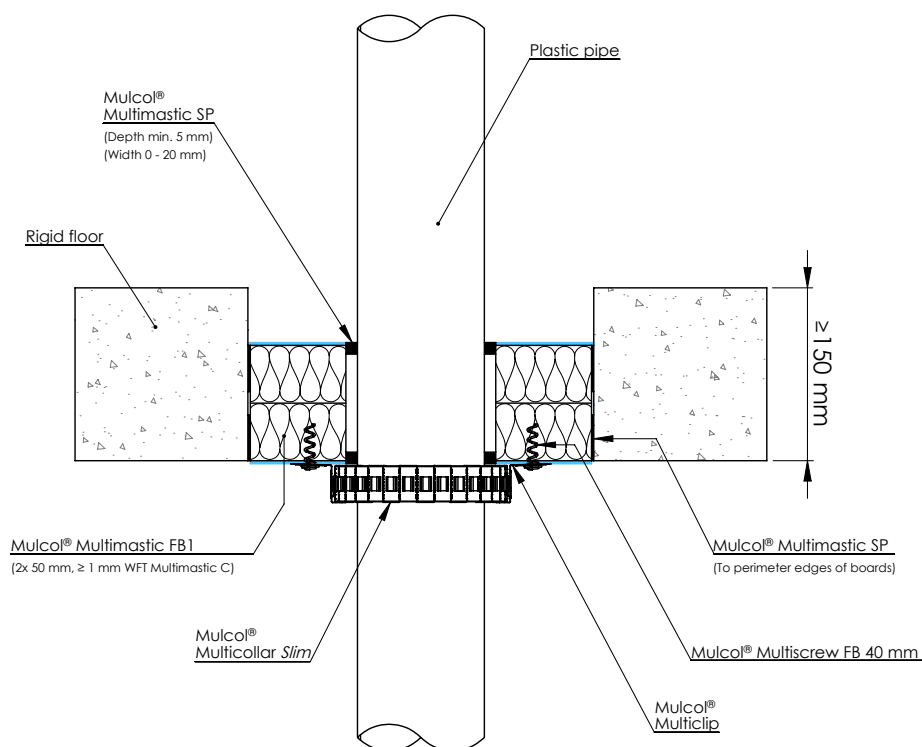

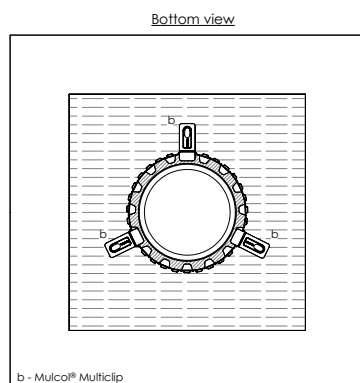


Drawing: PBrf.E-PP-MFB1.2.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7	Multicollar Slim	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 90 U/U
		2.7 - 6.6			EI 60 U/U
PP		2.7			EI 90 U/U
		2.7 - 6.3			EI 60 U/U
		2.7			EI 90 U/U
PVC(-U/-C)		2.7 - 6.3			EI 60 U/U
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 160	4.0			EI 90 U/C, E 120 U/C
		4.0 - 14.6			EI 60 U/C
PP		4.0			EI 45 U/C, E 60 U/C
		4.0 - 14.6			EI 60 U/C
PVC(-U/-C)		4.0			EI 45 U/C, E 60 U/C
		4.0 - 14.6			EI 45 U/C, E 60 U/C

B.1.2 Multimastic FB1 - 2x50 mm no cavity - Combustible pipes

B.1.2.2 Plastic pipes (Silent)

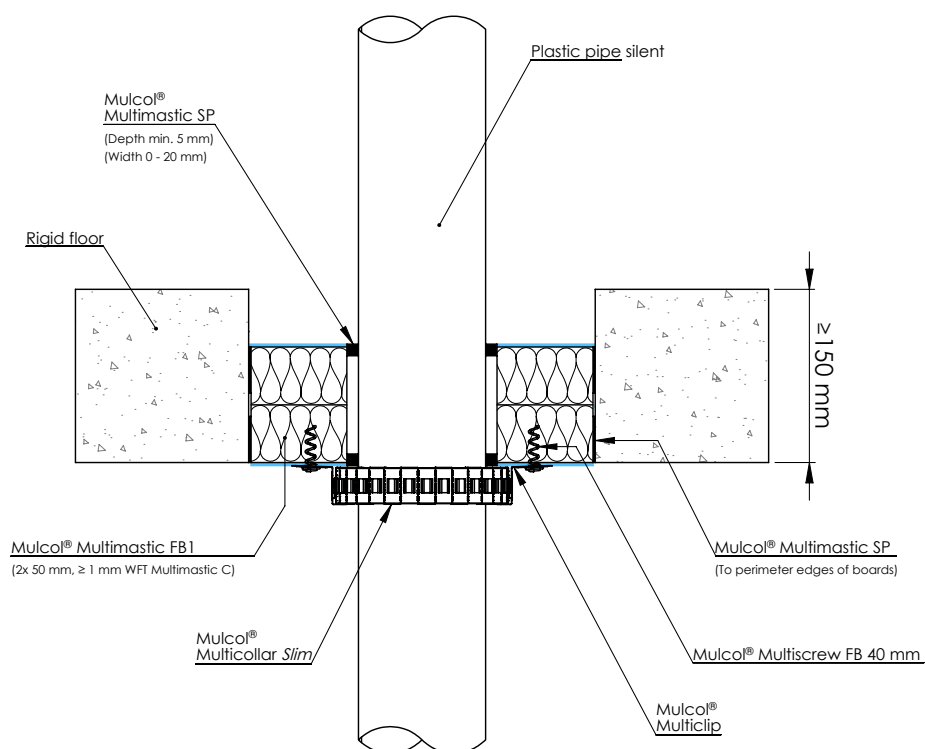

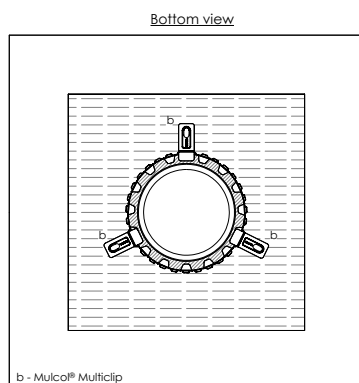


Drawing: PBrf.E-PPS-MFB1.2.10

Services	Pipe dimensions (mm)		System	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB20	≤ Ø 110	6.0	Multicollar Slim	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 90 U/U

B.1.2 Multimastic FB1 - 2x50 mm no cavity - Combustible pipes

B.1.2.3 PP-R Multilayer pipes

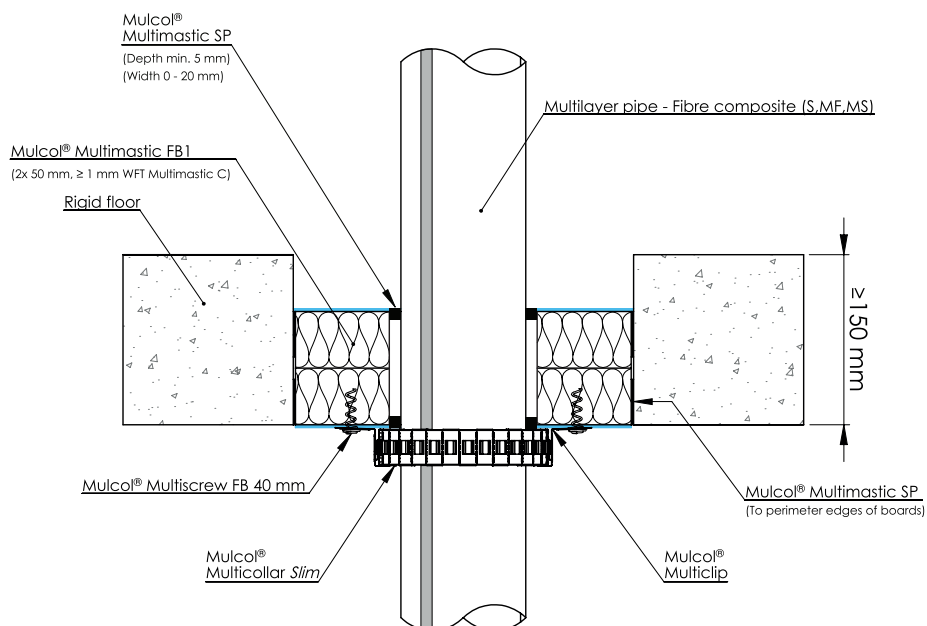

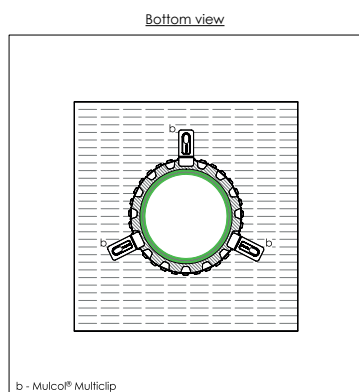


Drawing: PBrf.E-MLF-11.0.10

Services	Pipe dimensions (mm)		System	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Aquatherm Green-MF	$\leq \varnothing 50$	6.9	Multicollar Slim	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 90 U/C
	$\leq \varnothing 110$	10.0			EI 60 U/C

B.1.3 Multimastic FB1 - 2x50 mm cavity 50 mm - Combustible pipes

B.1.3.1 Plastic pipes

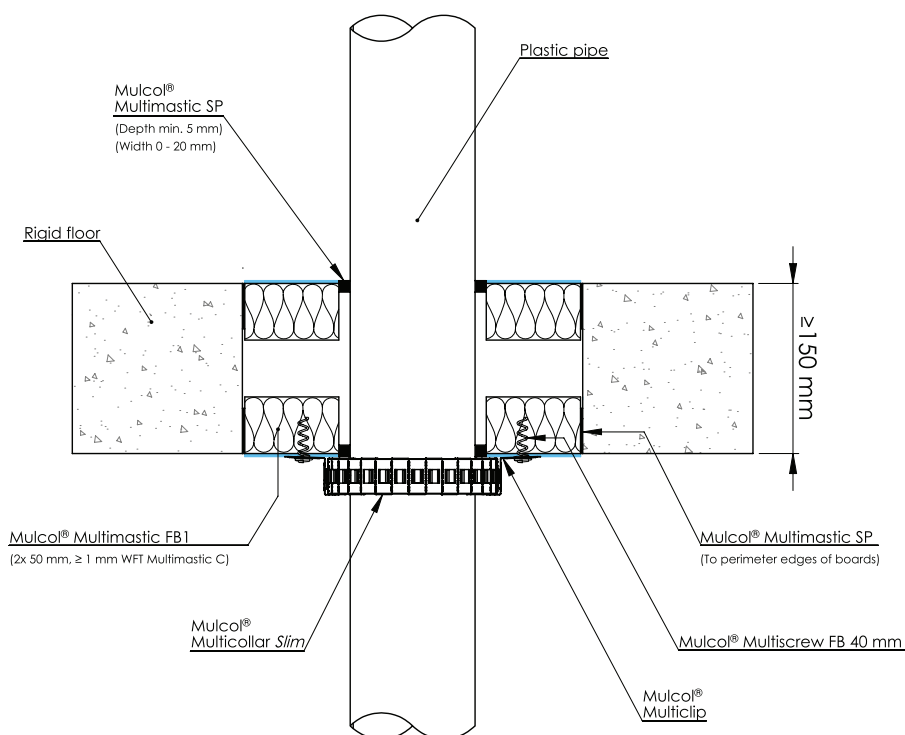

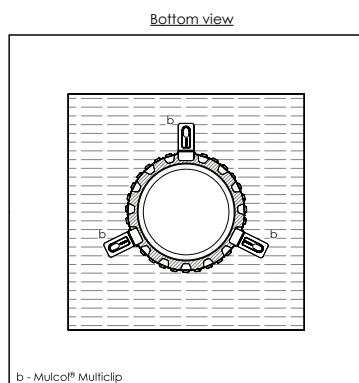


Drawing: PBrf.E-PP-MFB1.2.10.C

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 110	2.7	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/U
		2.7 - 6.6			EI 60 U/U
		2.7 - 3.1			EI 120 U/C
PP	≤ Ø 125	3.1			EI 90 U/U
		2.7			EI 60 U/U
		2.7 - 6.3			EI 90 U/U
PVC(-U/-C)	≤ Ø 110	2.7			EI 60 U/U
		2.7 - 6.3			EI 60 U/U

B.1.3 Multimastic FB1 - 2x50 mm cavity 50 mm - Combustible pipes

B.1.3.2 Plastic pipes (Silent)

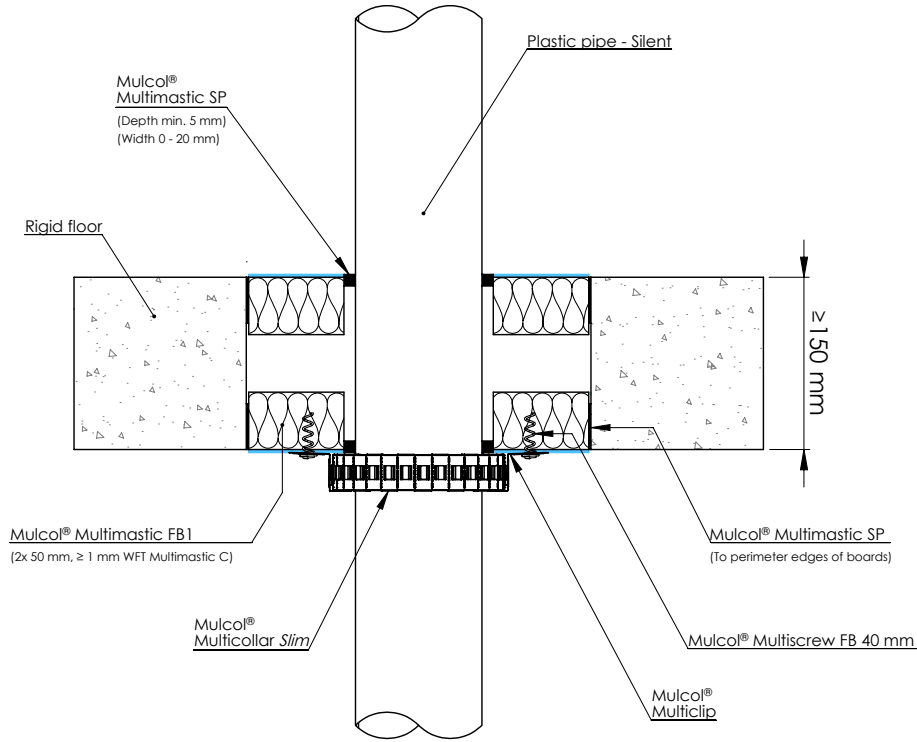

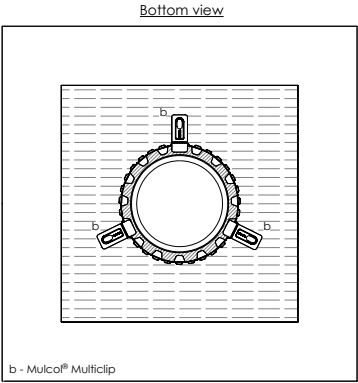


Drawing: PBrf-PPS-MFB1.2.10.C

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimensions	Wall thickness			
Geberit Silent dB20	≤ Ø 110	6.0	Multicollar Slim	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 90 U/U

B.1.3 Multimastic FB1 - 2x50 mm cavity 50 mm - Combustible pipes

B.1.3.3 PP-R Multilayer pipes

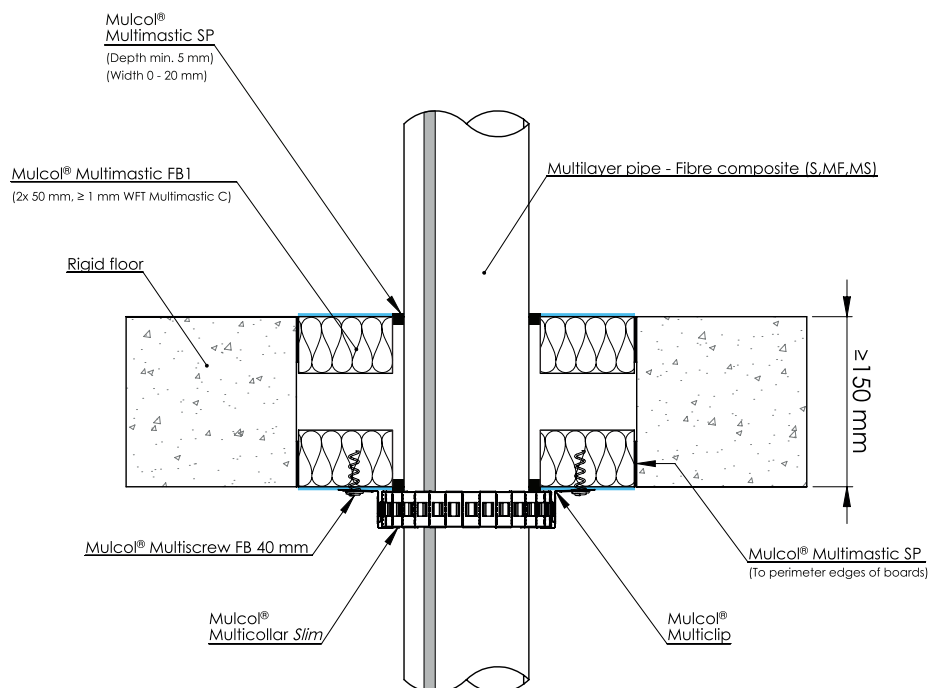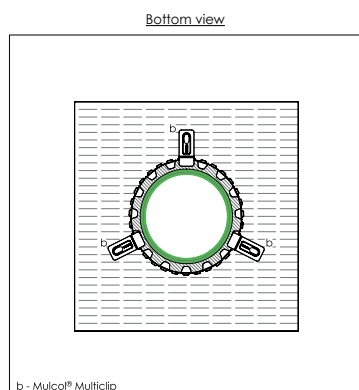



Drawing: PBrf.E-MLF-11.0.10.C

Services	Pipe dimensions (mm)		System	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Aquatherm Green-MF	≤ Ø 50	6.9	Multicollar Slim	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 90 U/C
	≤ Ø 110	10.0			EI 120 U/C


B.1.3 Multimastic FB1 - 2x50 mm cavity 50 mm - Combustible pipes

B.1.3.4 Drinks tubing system

Bottom view

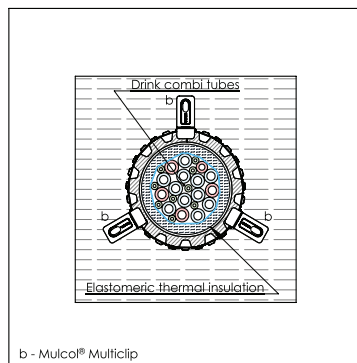

Position seal:
top, bottom or anywhere
in between



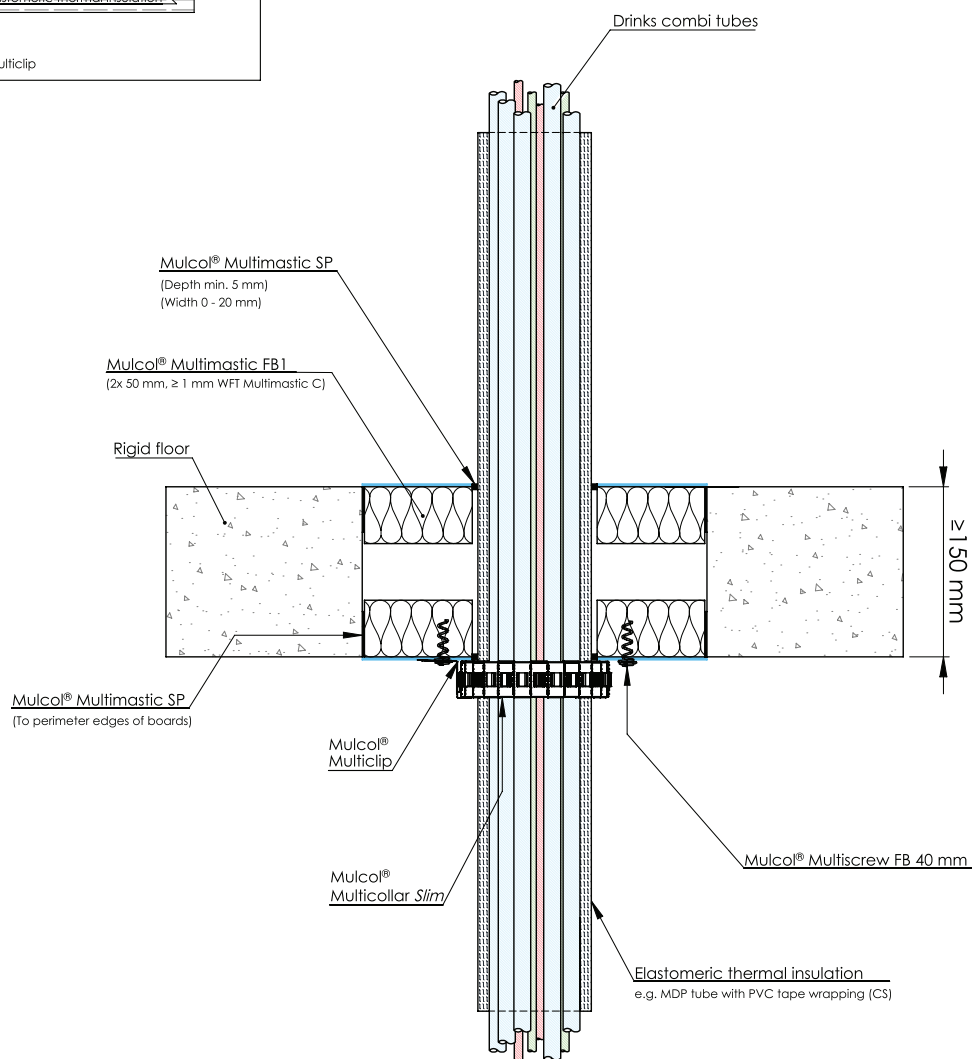


Drawing: PBrf.E-MC30-DCT25-11.0.22.C

Services	Dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimension	No. of Hoses	Type	Thickness (mm)	Configuration			
Drinks tubing system	≤ Ø 47	≤ 3	Elastomeric foam	8 - 35	CS	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 120 U/C
	≤ Ø 90	≤ 3						
	≤ Ø 100	≤ 25						
	≤ Ø 145	≤ 52						

B.1.4 Multimastic FB1 - 1x60 mm - Combustible pipes

B.1.4.1 Plastic pipes

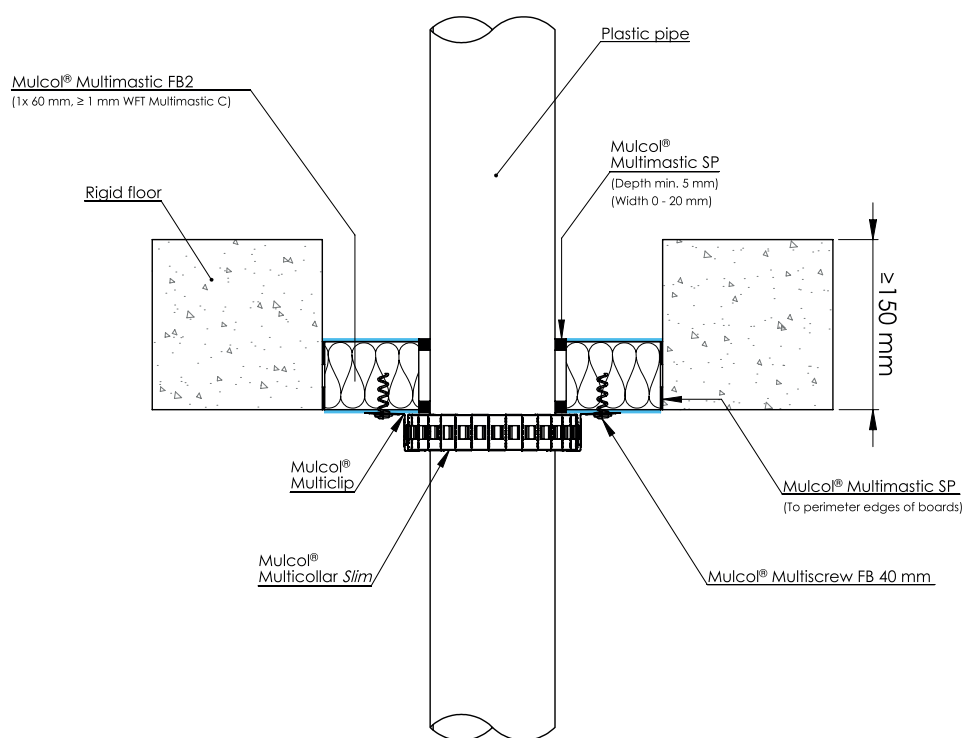

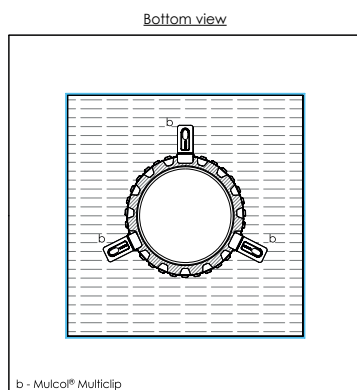


Drawing: PBrf.E-PP-MFB2.1.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 40	2.4	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 5 (wxd)	EI 60 U/U, E 90 U/U
		2.4 - 6.6			EI 30 U/U
PP		1.8			EI 90 U/U, E 180 U/U
		1.8 - 5.5			EI 30 U/U
PVC(-U/-C)		2.4			EI 60 U/U, E 90 U/U
		2.4 - 4.3			EI 30 U/U
	≤ Ø 110	2.7			EI 120 U/U
PE(-HD) / PE-X / ABS / SAN+PVC		2.7 - 6.6			EI 30 U/U
		3.9			EI 120 U/C
PP	≤ Ø 125	3.9 - 7.4			EI 45 U/C
		3.1 - 7.1			

B.1.5 SVT Flamro BS60 - 1x60 mm - Combustible pipes

B.1.5.1 Plastic pipes

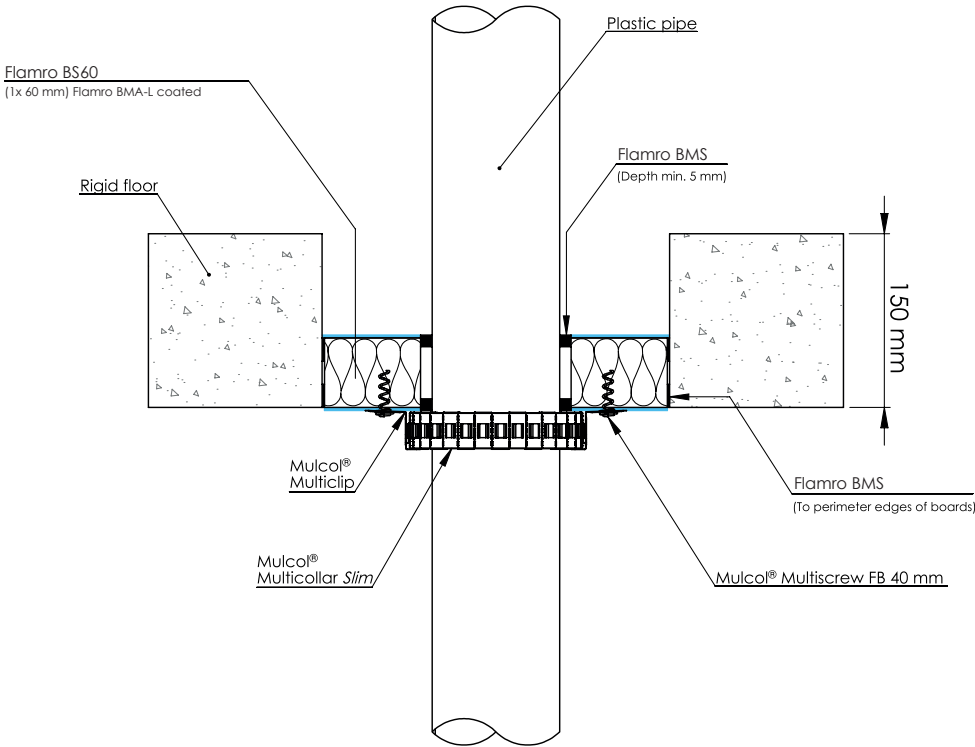
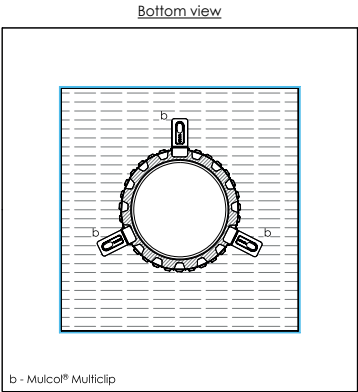


Drawing: PBrf.E-PP-BS2.1.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 125	3.9	Multicollar Slim	Flamro BMS 0-20 x ≥ 5 (wxd)	EI 120 U/C, E 180 U/C

B.1.6 Multimortar - ≥ 100 mm - Combustible pipes

B.1.6.1 Plastic pipes

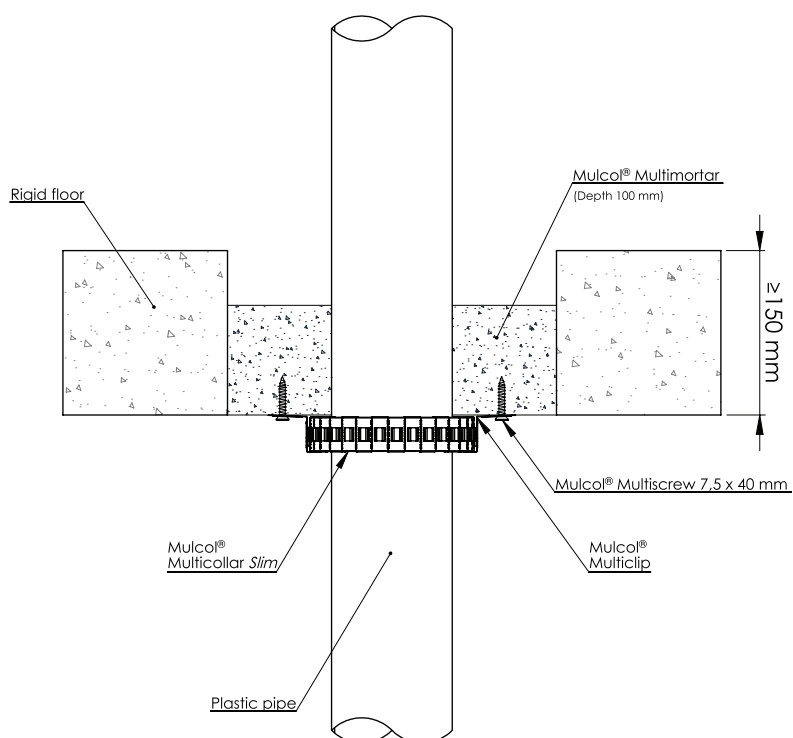
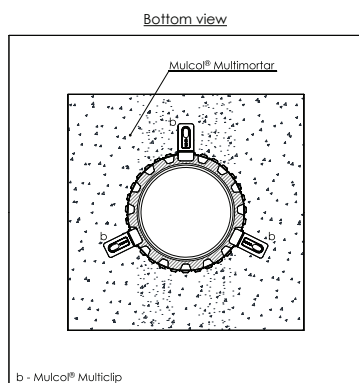


Drawing: RF.E-MC30-PP-MM1.2.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	2.7	Multicollar Slim	EI 120 U/U
		2.7 - 6.6		EI 60 U/U, E 90 U/U
PP		2.7		EI 90 U/U
		2.4 - 6.3		EI 60 U/U
PVC(-U/-C)		2.7		EI 90 U/U
		2.4 - 6.3		EI 45 U/U, E 60 U/U

B.1.6 Multimortar - ≥ 100 mm - Combustible pipes

B.1.6.2 Plastic pipes (Silent)

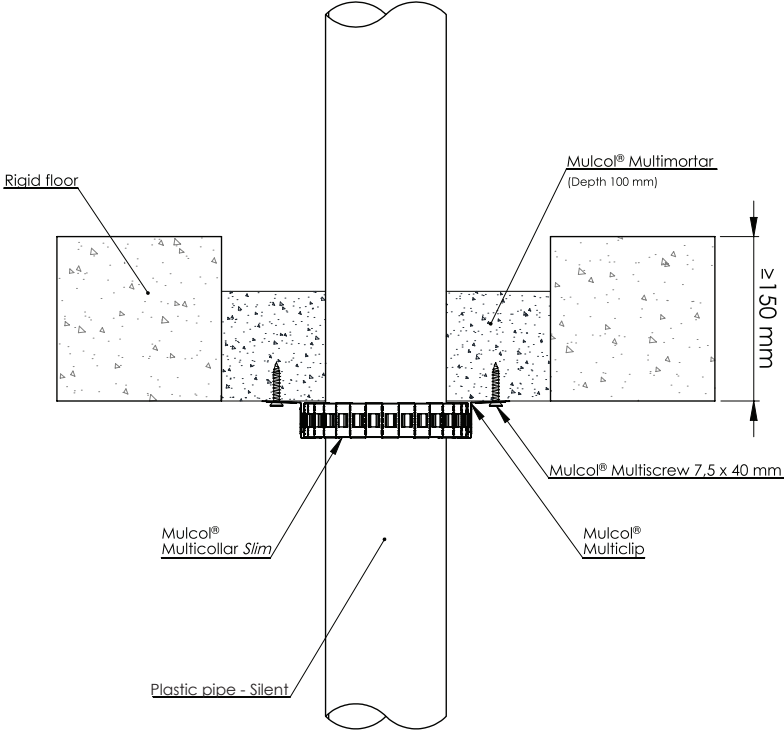
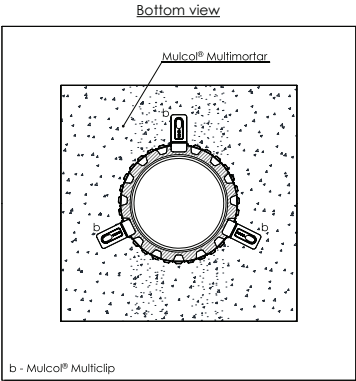


Drawing: RF.E-MC30-PPS-MM1.2.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Geberit Silent dB 20	$\leq \varnothing 110$	6.0	Multicollar Slim	EI 90 U/U

B.1.6 Multimortar - ≥ 100 mm - Combustible pipes

B.1.6.3 PP-R Multilayer pipes

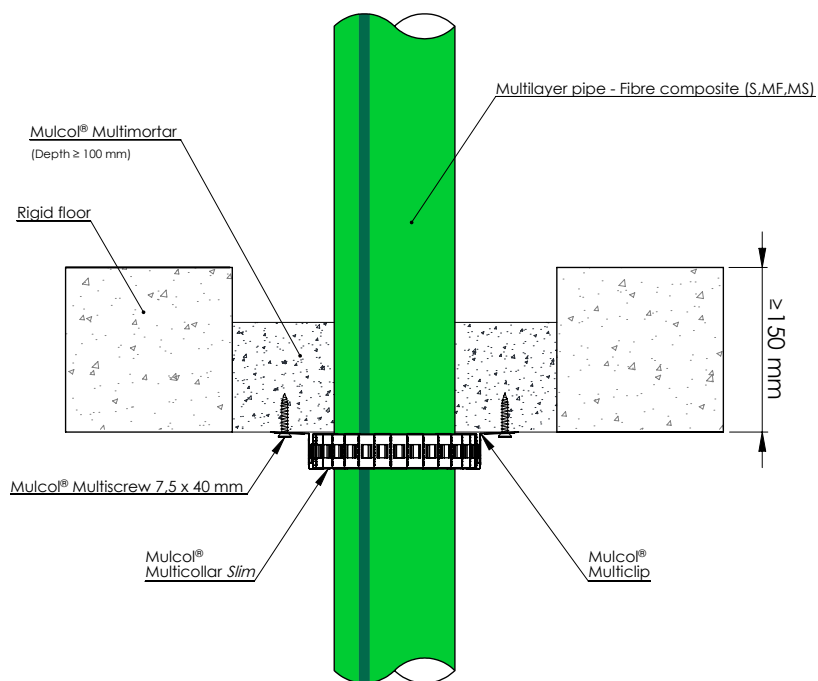
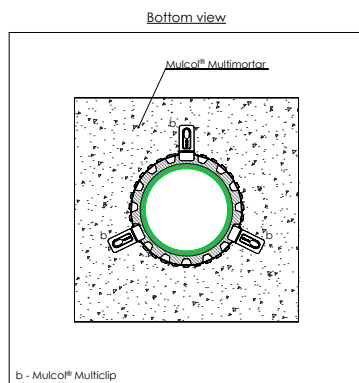


Drawing: RF.E-MC30-MLF-MM1.2.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Green	$\leq \varnothing 50$	6.9	Multicollar Slim	EI 90 U/C
Aquatherm Blue	$\leq \varnothing 110$	10.0		EI 60 U/C

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.1 Plastic pipes

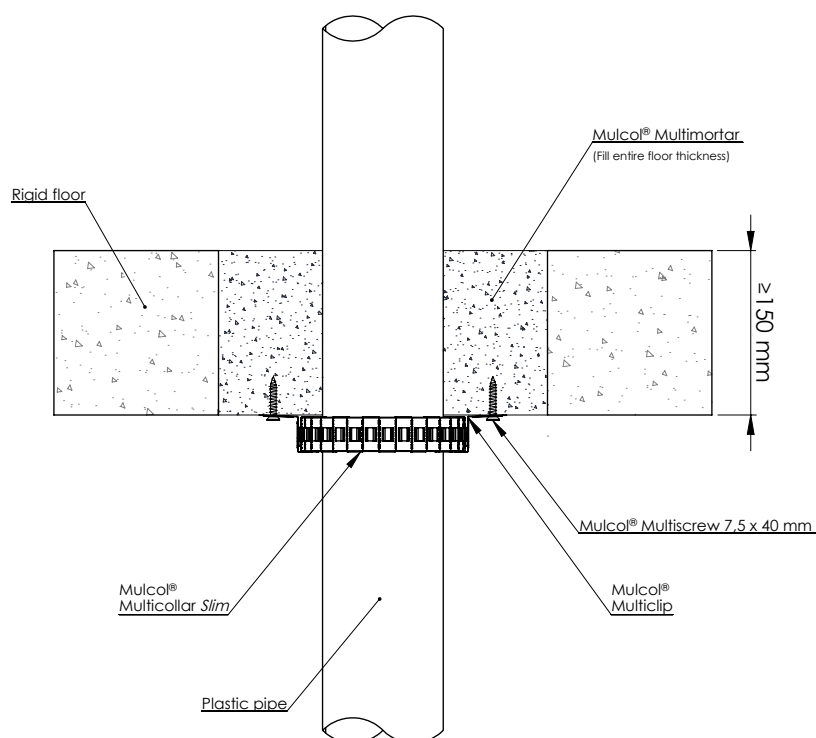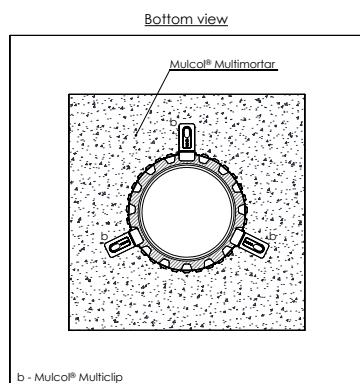

Drawing: RF.E-MC30-PP-MM1.3.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 40$	2.4 - 6.6	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U
		6.6 - 14.6			EI 120 U/C
	$\leq \varnothing 110$	2.7 - 6.6			EI 90 U/U
		6.6			EI 120 U/U
		6.6 - 14.6			EI 120 U/C
	$\leq \varnothing 160$	4.0			EI 60 U/U
		4.0 - 14.6			EI 60 U/C
		14.6			EI 120 U/C



B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.1 Plastic pipes

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PP	≤ Ø 40	1.8 - 6.3	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U
		6.3 - 14.6			EI 120 U/C
	≤ Ø 110	2.7 - 6.3			EI 90 U/U
		6.3 - 14.6			EI 90 U/C
		14.6			EI 120 U/C
	≤ Ø 125	3.1 - 4.0			EI 90 U/U
		4.0 - 4.8			EI 60 U/U
		4.8 - 14.6			EI 90 U/C
		14.6			EI 120 U/C
	≤ Ø 160	4.0			EI 90 U/U
		4.0 - 14.6			EI 90 U/C
		14.6			EI 120 U/C
Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PVC(-U/-C)	≤ Ø 40	1.9 - 8.2	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U
		8.2 - 14.6			EI 120 U/C
	≤ Ø 110	2.2 - 8.2			EI 120 U/U
		8.2 - 12.3			EI 90 U/U
		12.3 - 14.6			EI 120 U/C
	≤ Ø 125	2.5 - 4.0			EI 60 U/U
		4.0 - 14.6			EI 60 U/C
	≤ Ø 160	1.8 - 4.0			EI 30 U/U
		4.0			EI 60 U/U
		4.0 - 14.6			EI 60 U/C
		14.6			EI 120 U/C

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.2 Plastic pipes - double Multicollar *Slim*

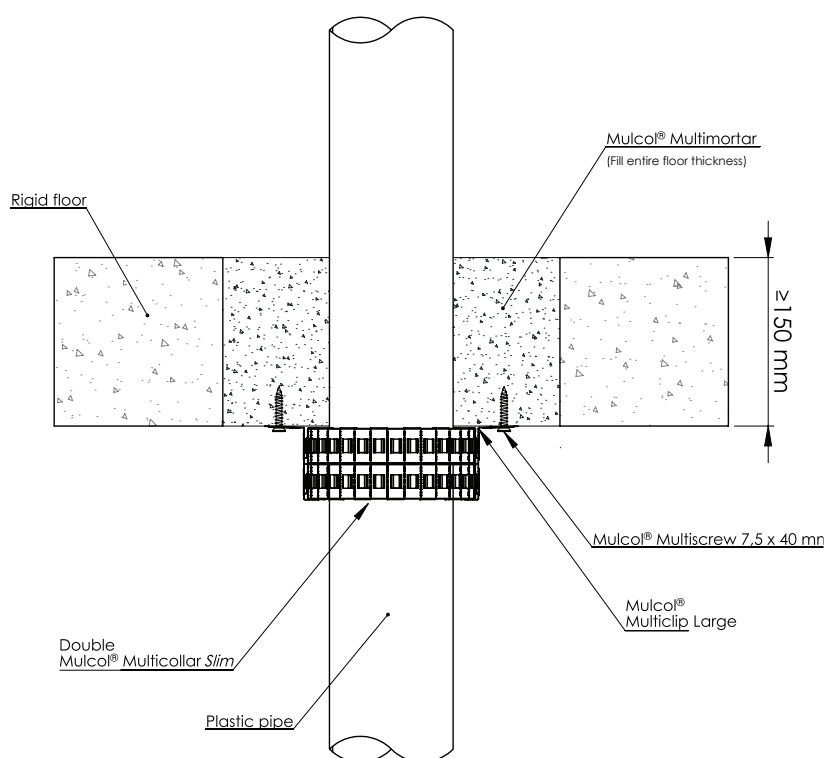
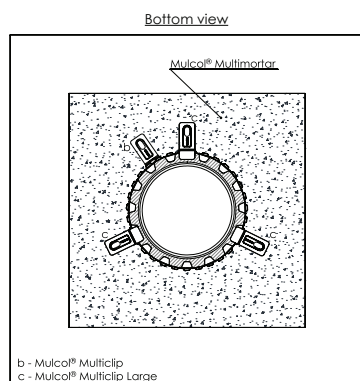


Drawing: RF.E-MC60-PP-MM1.3.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 160$	4.0	Multicollar <i>Slim</i> double	EI 90 U/U
		4.0 - 14.6		EI 90 U/C
PVC(-U/-C)	$\leq \varnothing 250$	7.7		EI 90 U/U
	$\leq \varnothing 160$	3.2 - 11.8		EI 120 U/C
	$\leq \varnothing 315$	7.7		

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.3 Plastic pipes perpendicular to 45°

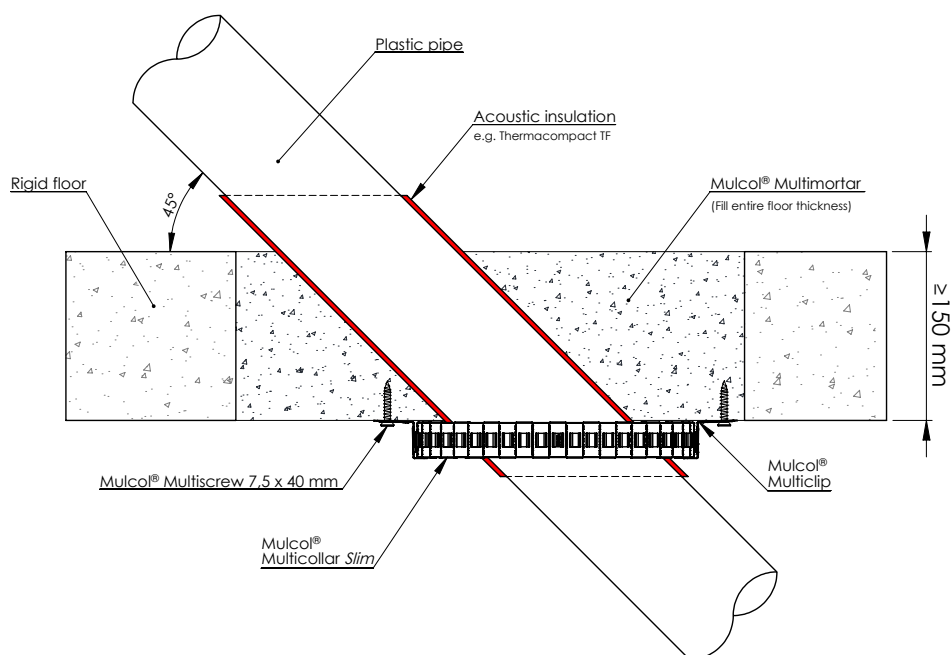
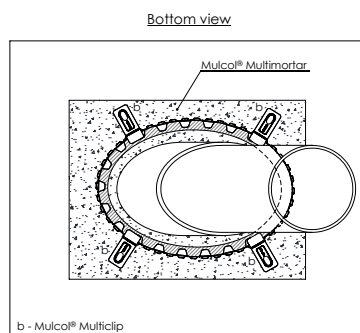


Drawing: RF.E-MC30o-PP-MM1.3.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	3.4	Multicollar Slim	EI 60 U/U

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.4 Plastic pipes perpendicular to 45° - double Multicollar *Slim*

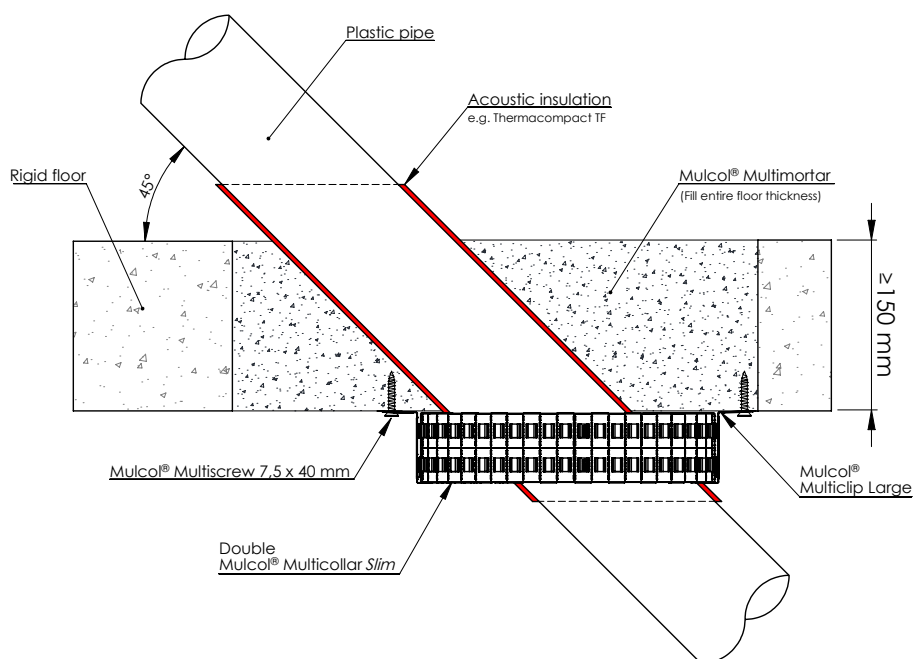
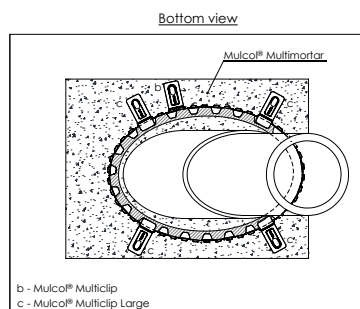


Drawing: RF.E-MC60o-PP-MM1.3.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	3.4 - 10.0	Multicollar <i>Slim</i> double	EI 60 U/U
		10.0		EI 90 U/U
PP		3.4		EI 120 U/U
		3.4 - 10.0		EI 90 U/U
PVC(-U/-C)		10.0		EI 60 U/U
				EI 90 U/U

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.5 Plastic pipes - Elastomer LS-LI 450 / CS-CI

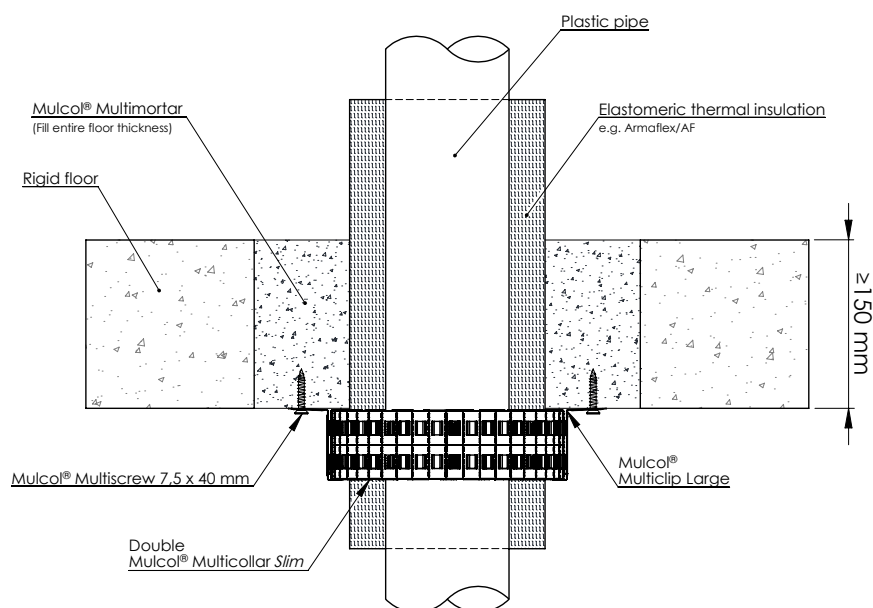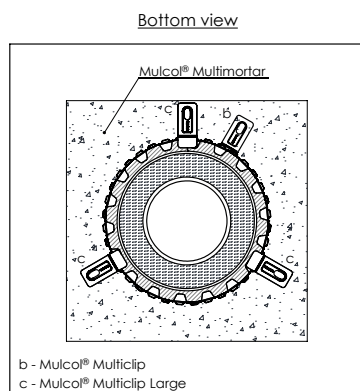



Drawing: RF.E-MC60-PP-MM1.3.22

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
PVC(-U/-C)	$\leq \varnothing 110$	3.2	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	9 - 32	LS 450 / CS LI 450 / CI	Multicollar Slim double	EI 120 U/U

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.6 Plastic pipes - Multicollar *Slim* recessed into soffit

Bottom view

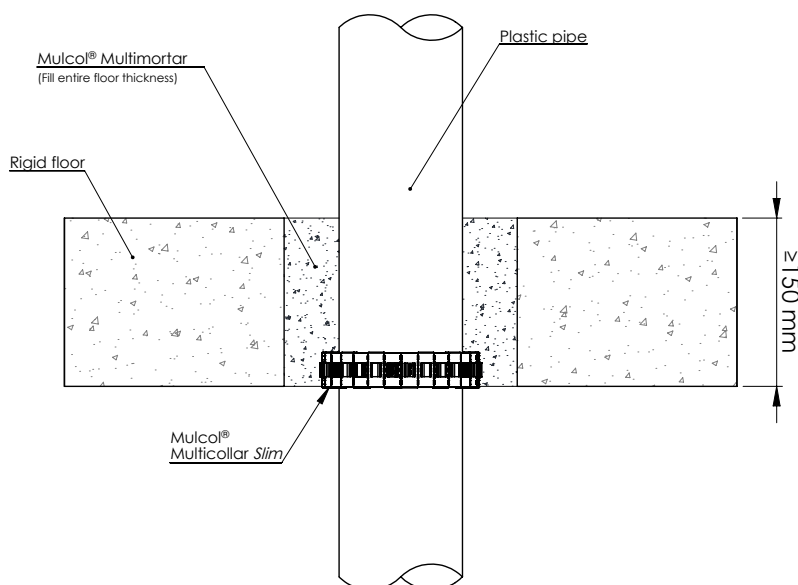
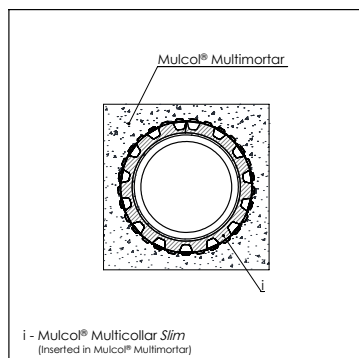


Drawing: RF.E-MC30i-PP-MM1.3.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PP	$\leq \varnothing 110$	6.3	Multicollar <i>Slim</i>	EI 30 U/U

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.7 Plastic pipes with socket

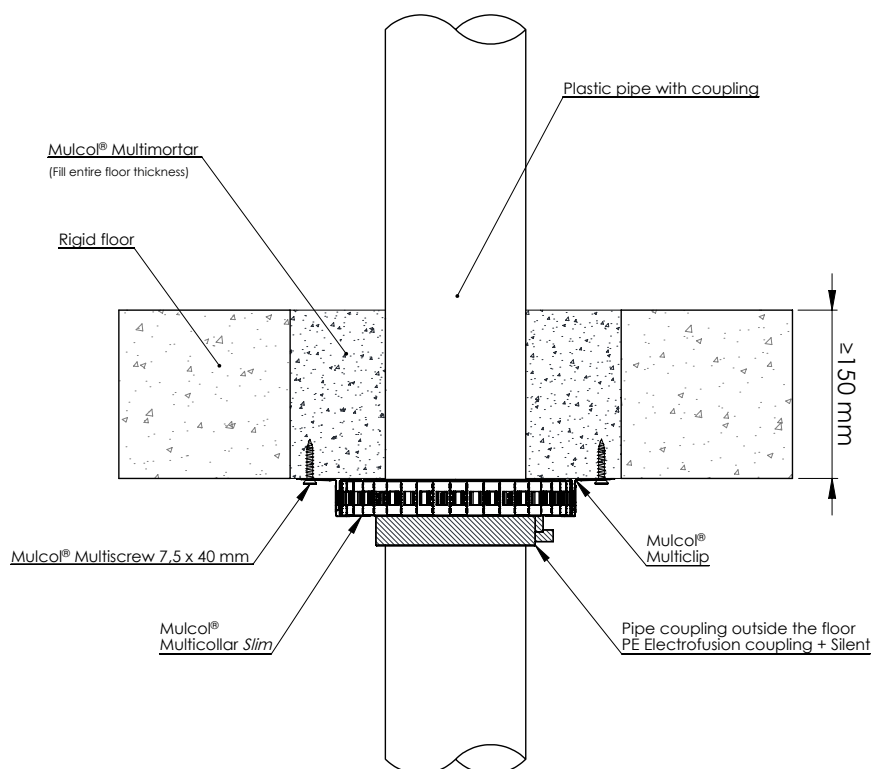
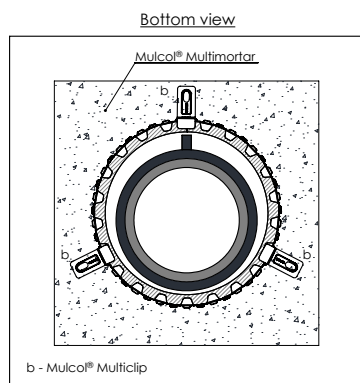


Drawing: RF.E-MC30-PP-MM1.3.60

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	4.3	Multicollar <i>Slim</i>	EI 90 U/C
	$\leq \varnothing 125$	7.4		EI 60 U/C

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.8 Plastic pipes with elbow and U-shape Multicollar *Slim*

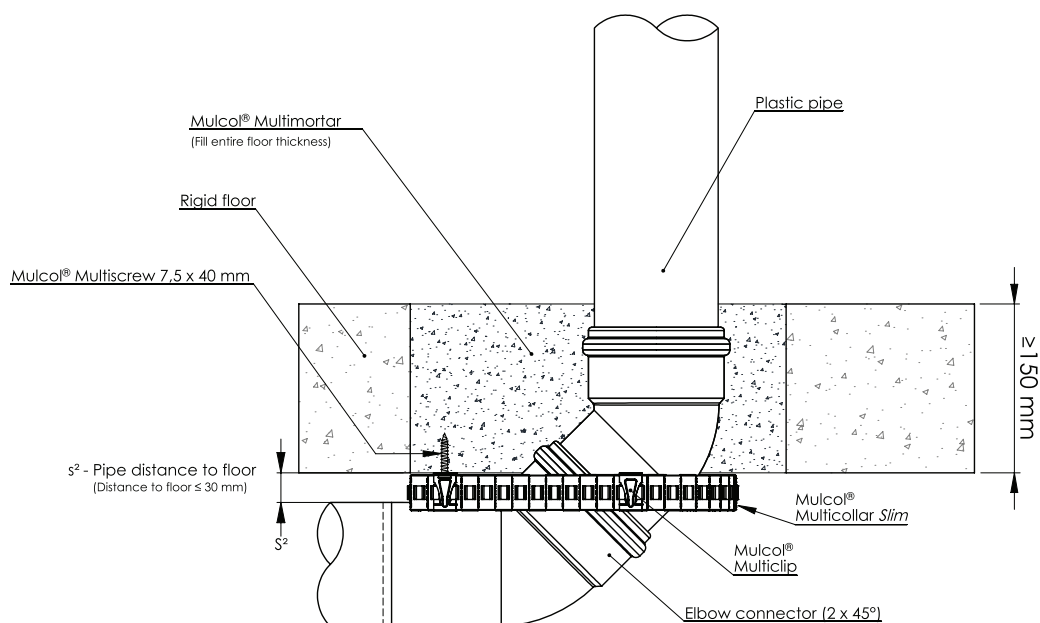
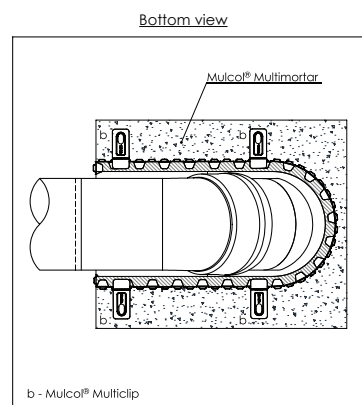


Drawing: RF.E-MC30u-PP-MM1.3.80

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PVC(-U/-C)	$\leq \varnothing 50$	2.7 - 3.0	Multicollar <i>Slim</i>	EI 90 U/U
		2.7		EI 120 U/U
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	2.7 - 6.6	Multicollar <i>Slim</i> double	EI 60 U/U, E 120 U/U

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.9 Plastic pipes in corner

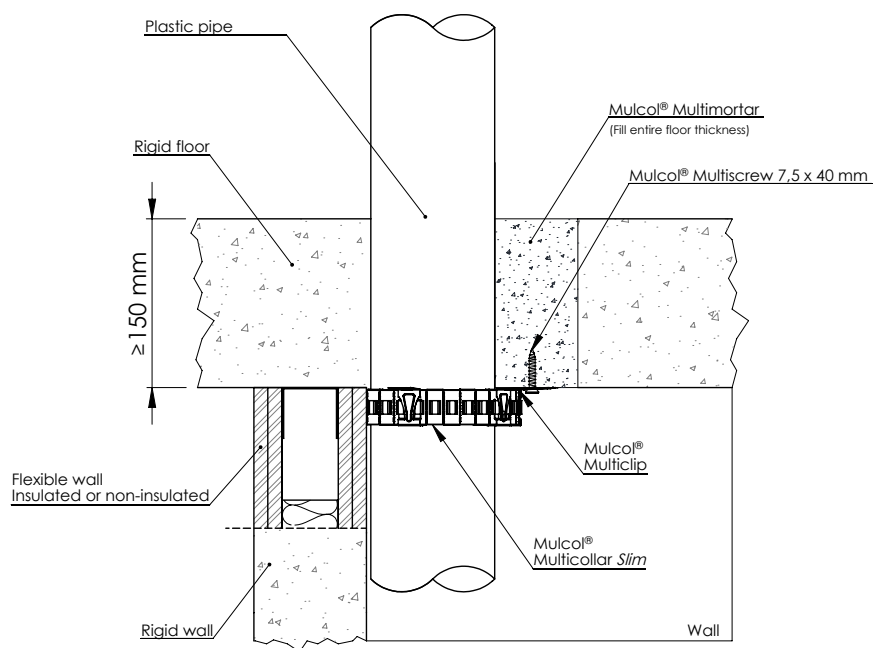
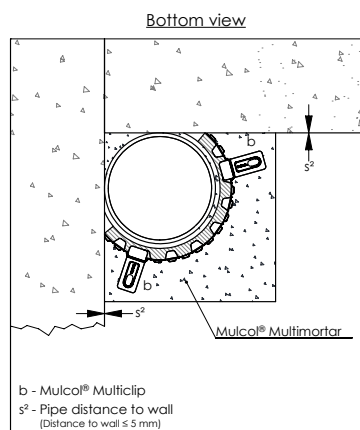


Drawing: RF.E-MC30c-PP-MM1.3.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	6.6	Multicollor Slim	EI 120 U/U
PP		6.3		EI 90 U/U
PVC(-U/-C)	$\leq \varnothing 125$	7.4		EI 60 U/C

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.10 Plastic pipes (Silent)

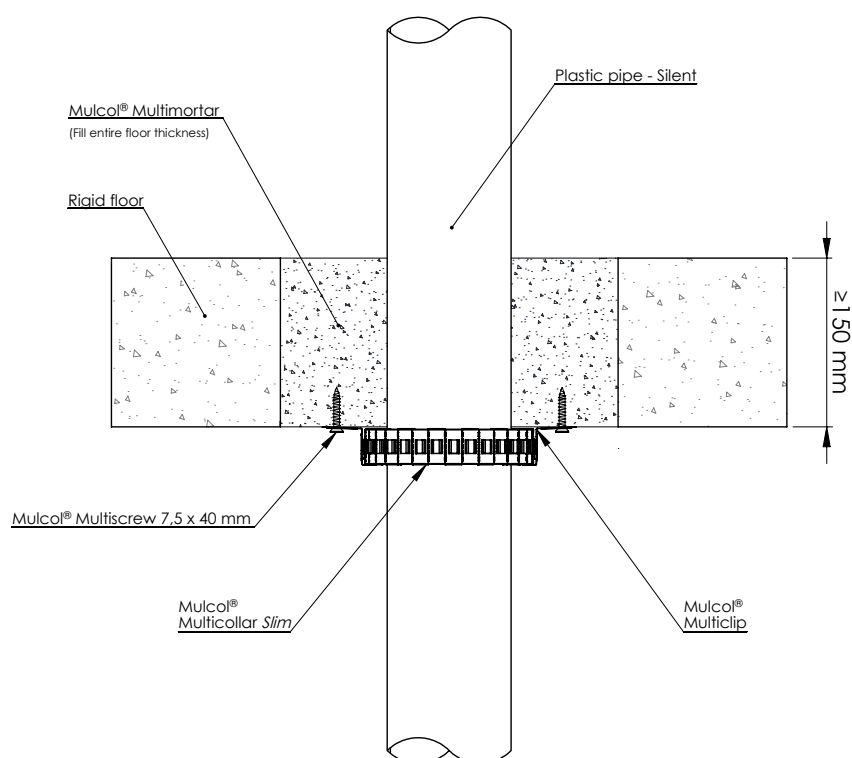
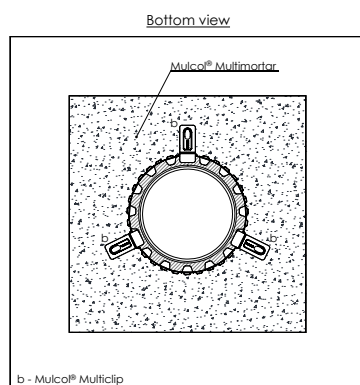


Drawing: RF.E-MC30-PPS-MM1.3.10

Services	Pipe dimensions (mm)		Product		Classification
	Outer dimension	Wall thickness			
Geberit Silent dB 20	$\leq \varnothing 56$	3.2 - 7.0	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U
	$\leq \varnothing 110$	6.0 - 7.0			
	$\leq \varnothing 160$	7.0			
Raupiano Plus	$\leq \varnothing 50$	1.8 - 4.0			
	$\leq \varnothing 110$	2.7 - 4.0			
	$\leq \varnothing 160$	4.0			
Wavin SiTech+	$\leq \varnothing 110$	3.6			

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.11 Plastic pipes (Silent) perpendicular to 45° - double Multicollar *Slim*

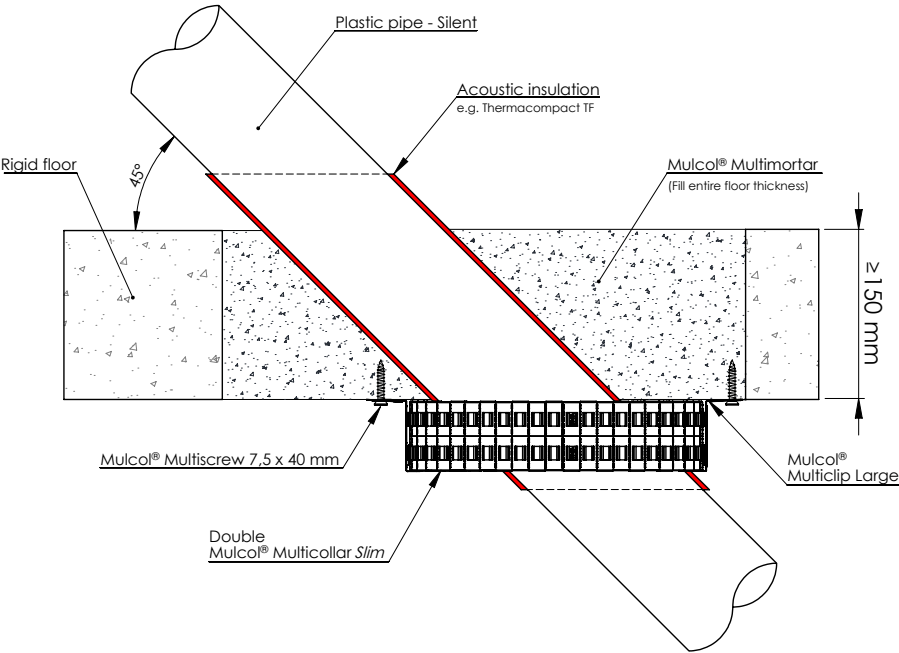
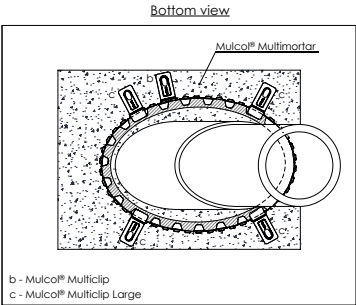


Drawing: RF.E-MC60o-PPS-MM1.3.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Geberit Silent dB 20	$\leq \varnothing 110$	6.0	Multicollar <i>Slim</i> double	EI 120 U/U

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.12 Plastic pipes (Silent) with socket

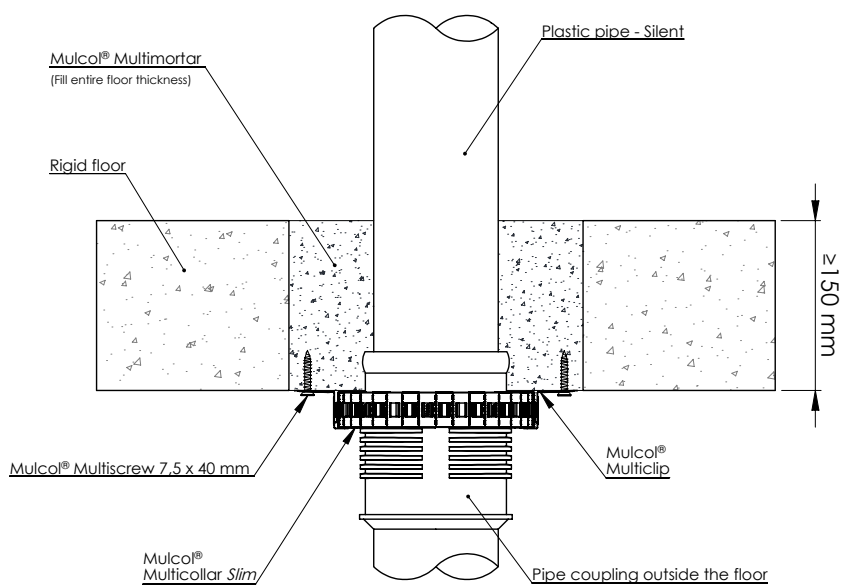
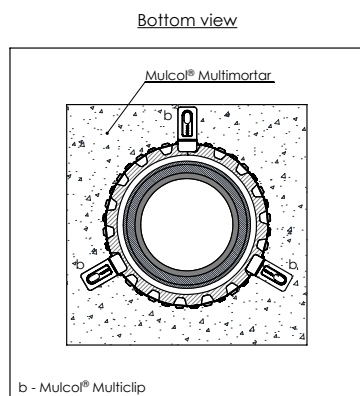


Drawing: RF.E-MC30-PPS-MM1.3.60

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Geberit Silent dB 20	$\leq \varnothing 110$	6.0	Multicollar Slim	EI 120 U/C
Raupiano Plus		2.7		EI 120 U/U
Wavin SiTech+		3.6		

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.13 Plastic pipes (Silent) with elbow

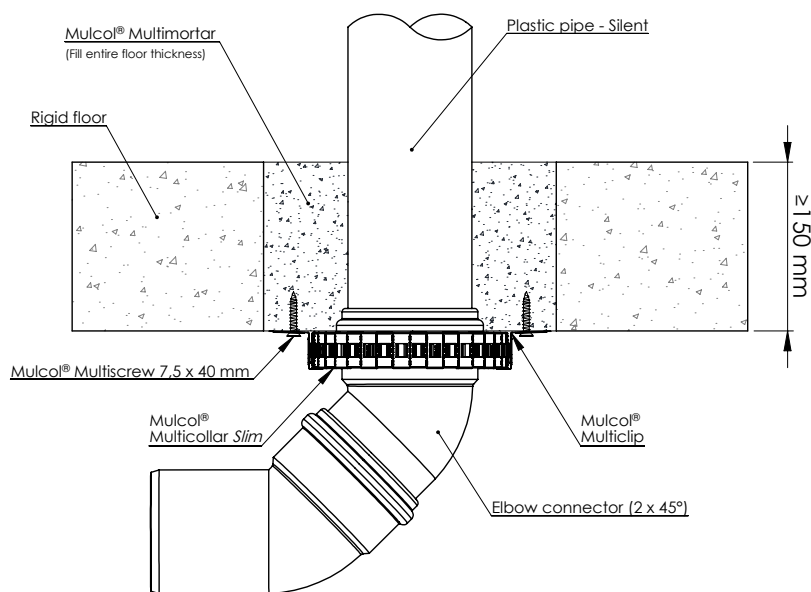
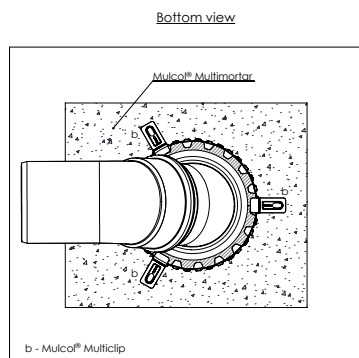


Drawing: RF.E-MC30-PPS-MM1.3.80

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Geberit Silent dB 20	$\leq \varnothing 110$	6.0	Multicollar Slim	EI 90 U/U
Wavin AS		5.3		EI 120 U/U

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.14 Plastic pipes (Silent) with elbow and U-shape Multicollar *Slim*

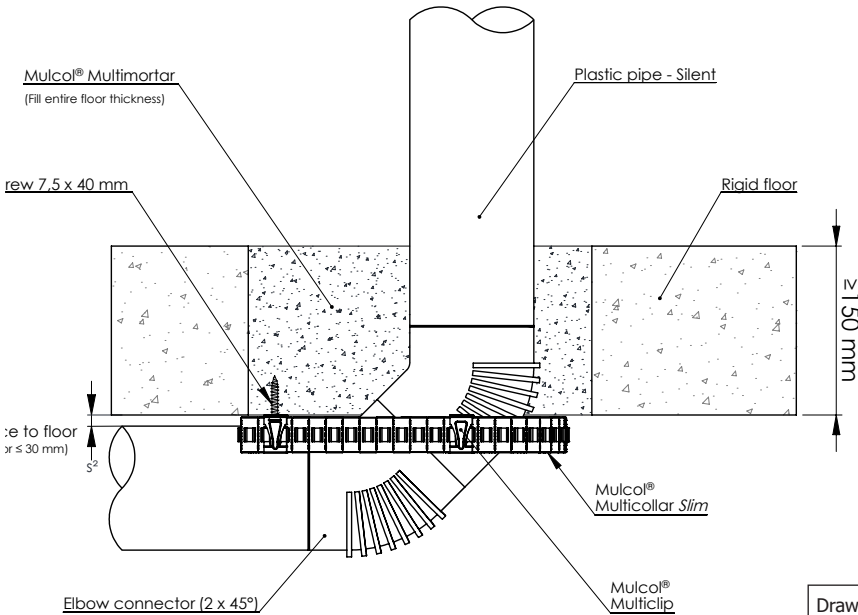
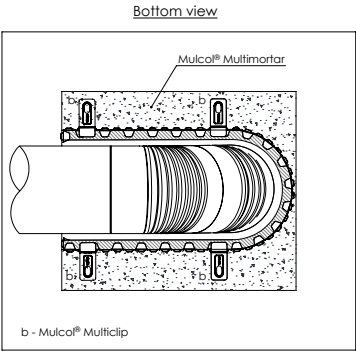


Drawing: RF.E-MC30u-PPS-MM1.3.80

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Geberit Silent dB 20	$\leq \varnothing 110$	6.0	Multicollar <i>Slim</i>	EI 90 U/U

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.15 Plastic pipes (Silent) in corner

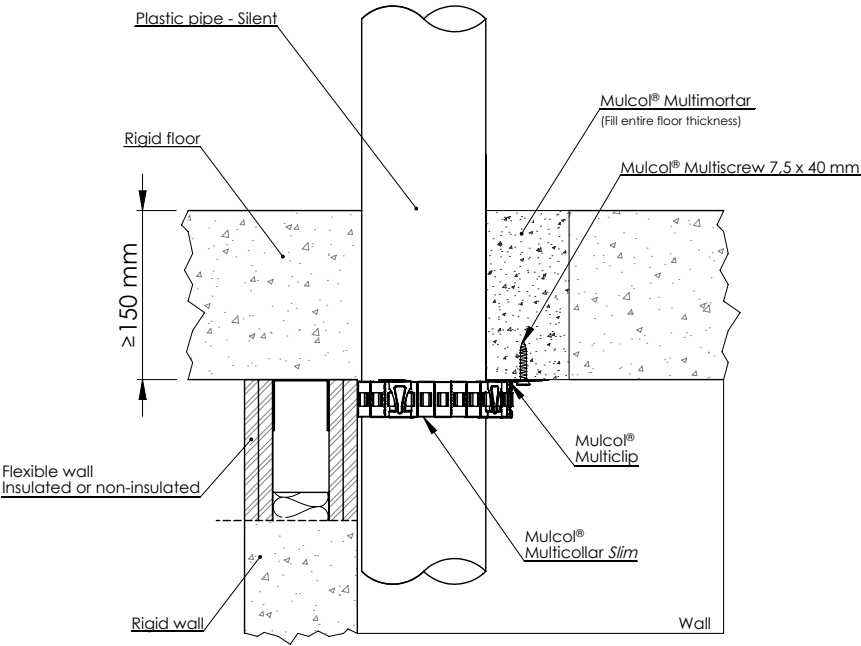
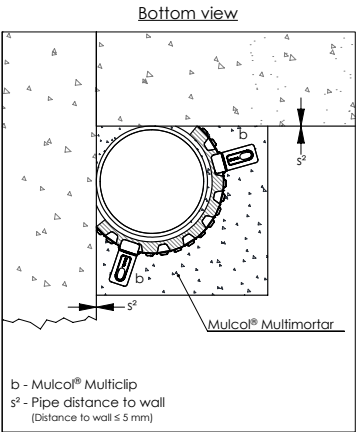


Drawing: RF,E-MC30c-PPS-MM1.3.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Geberit Silent dB 20	$\leq \varnothing 110$	6.0	Multicollar Slim	EI 120 U/C

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.16 PP-R Multilayer pipes

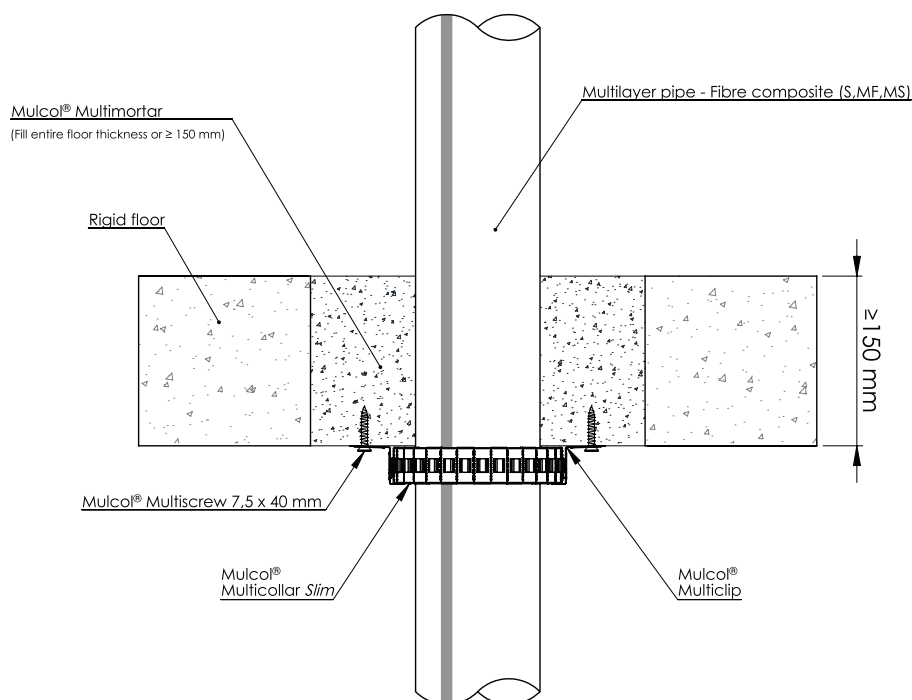
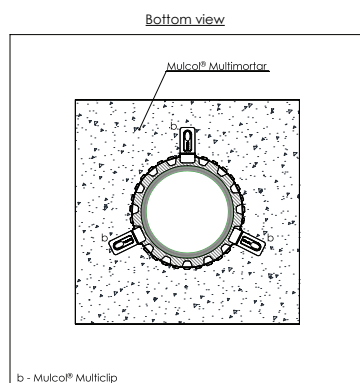


Drawing: RF.E-MC30-MLF-MM1.3.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Blue-MF	≤ Ø 20	2.8	Multicollar <i>Slim</i>	EI 120 U/C
	≤ Ø 110	10.0 - 14.6		EI 90 U/C
	≤ Ø 160	14.6		
Aquatherm Green-MF	≤ Ø 50	6.9		EI 120 U/C
Aquatherm Red-MF	≤ Ø 110	15.1		
Aquatherm Blue-MF	≤ Ø 250	22.7	Multicollar <i>Slim</i> double	

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.17 PP-R Multilayer pipes - Elastomer LS-LI 300 / CS-CI

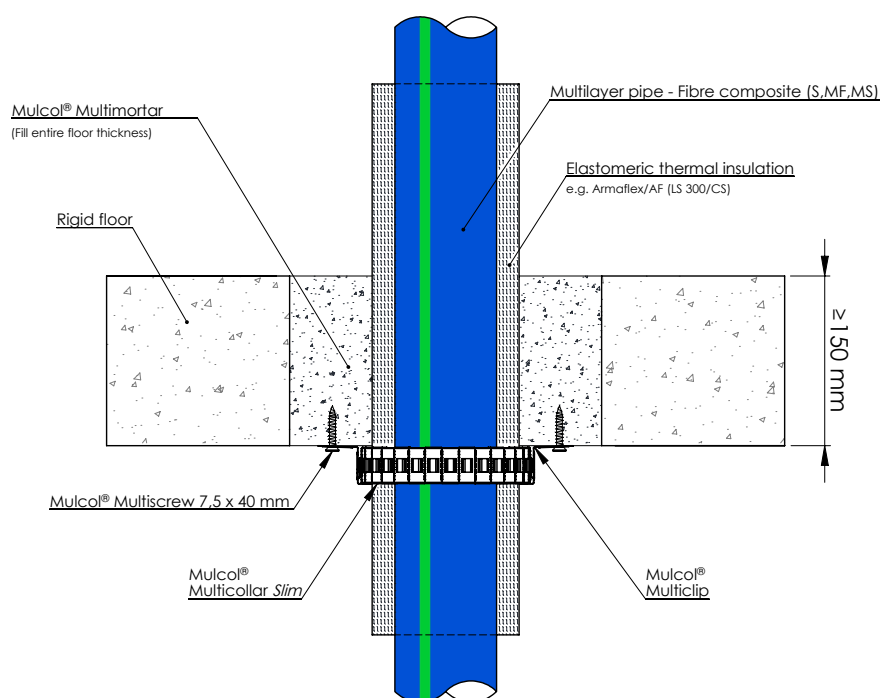
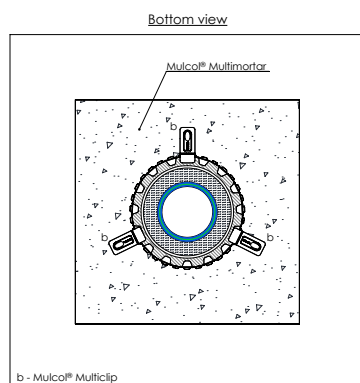


Drawing: RF.E-MC30-MLF-MM1.3.22

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
Aquatherm Green-MF	$\leq \varnothing 110$	18.3	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	9 - 32	LS 300 / CS LI 300 / CI	Multicollar Slim	EI 120 U/C
		15.2					
		15.1					
Aquatherm Blue-MF	$\leq \varnothing 20$	2.8					
	$\leq \varnothing 110$	10.0					

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.18 PP-R Multilayer pipes in corner

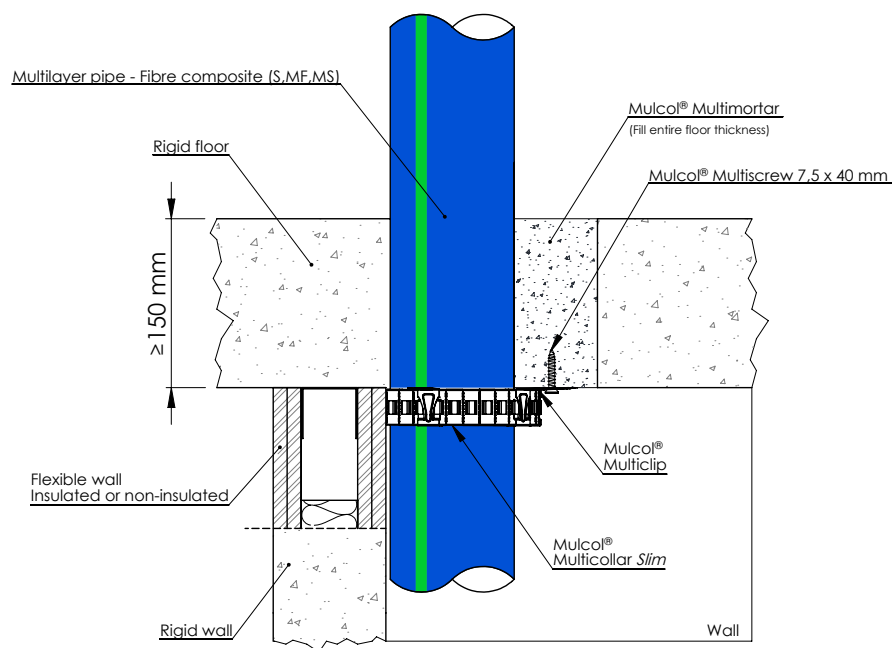
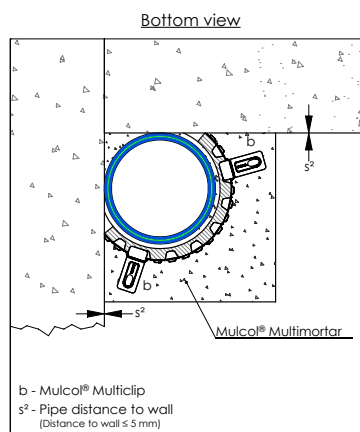


Drawing: RF.E-MC30c-MLF-MM1.3.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Blue-MF	$\leq \varnothing 110$	10.0	Multicollar Slim	EI 90 U/C

B.1.7 Multimortar - ≥ 150 mm - Combustible pipes

B.1.7.19 Drinks tubing system

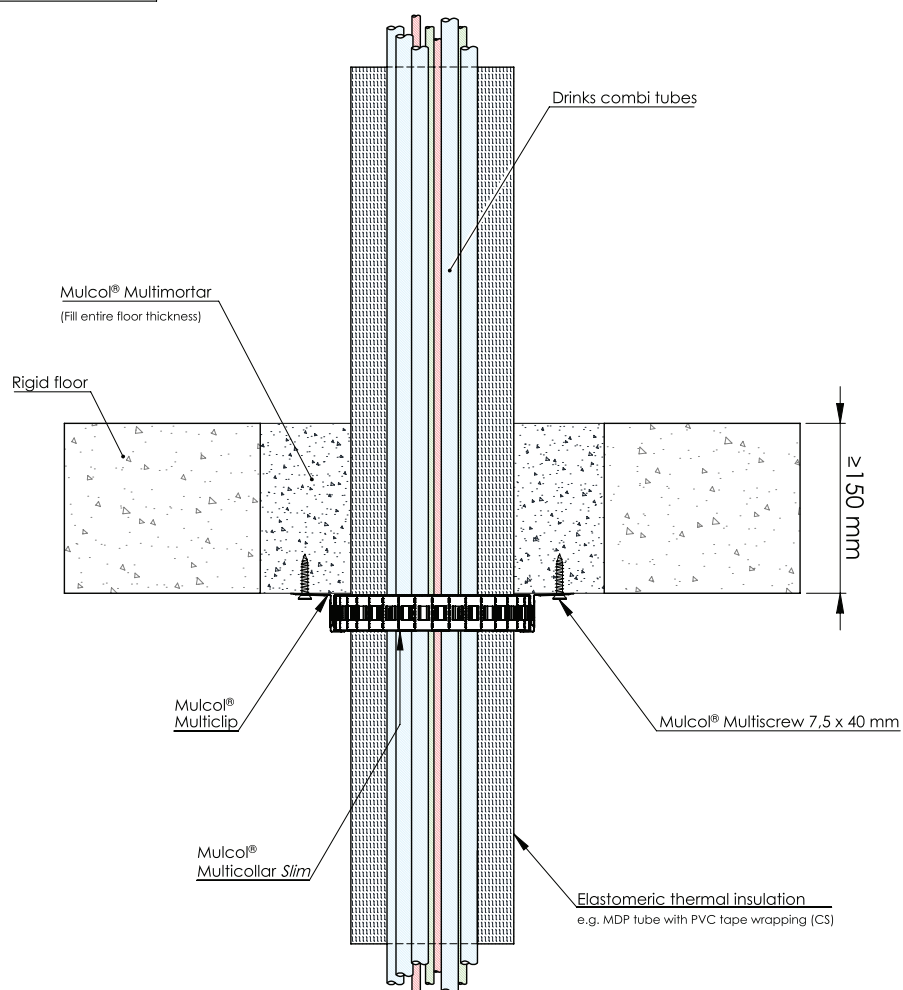
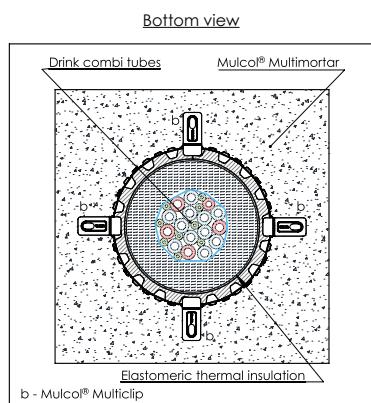


Drawing: RF.E-MC30-DCP52-MM1.3.10

Services	Dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Hoses no.	Type	Thickness (mm)	Configuration		
Drinks tubing system	$\leq \varnothing 145$	≤ 52	Elastomeric foam	8 - 35	CS	Multicollar <i>Slim</i>	EI 120 U/C

B.1.8 Multimortar + Multimastic FB - ≥ 100 mm - Combustible pipes

B.1.8.1 Plastic pipes

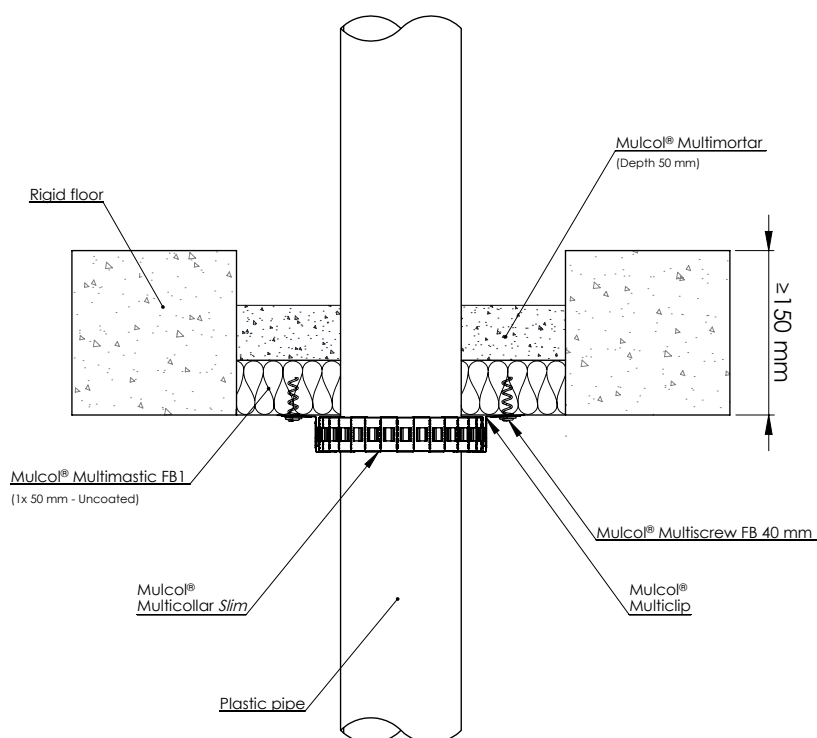
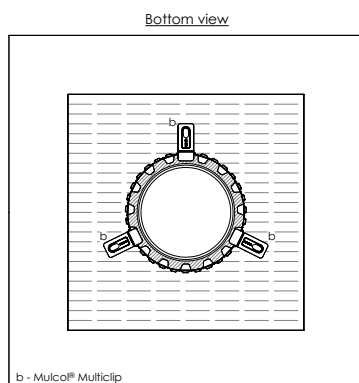


Drawing: RF.E-MC30-PP-MM2.5.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	2.7	Multicollor Slim	EI 120 U/U
PP		2.7 - 6.6		EI 60 U/U
PVC(-U/-C)		2.7 - 6.3		

B.1.8 Multimortar + Multimastic FB - ≥ 100 mm - Combustible pipes

B.1.8.2 Plastic pipes (Silent)

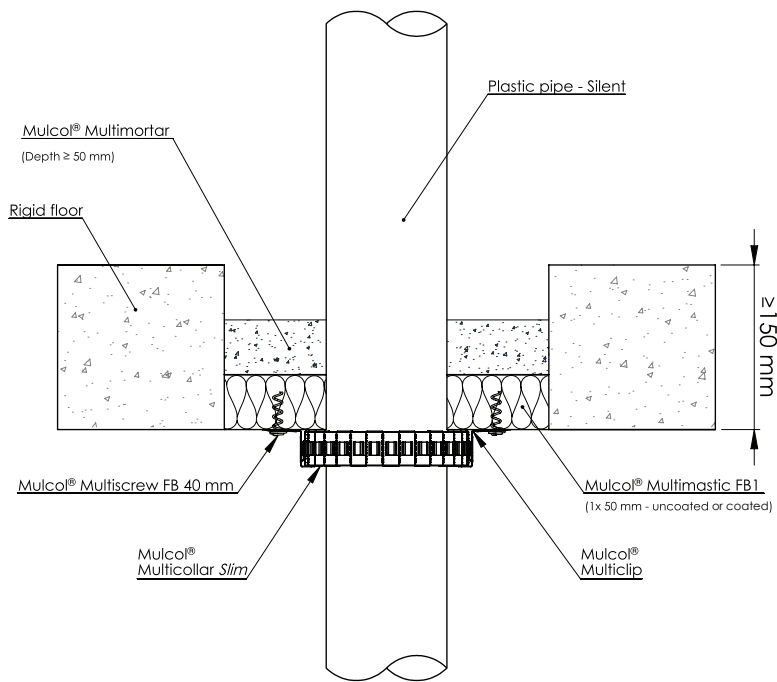
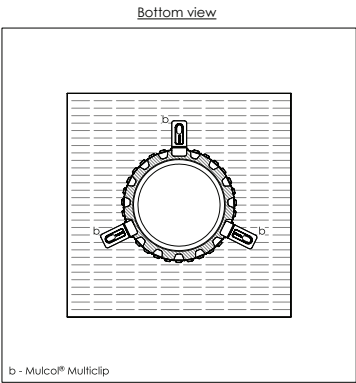


Drawing: RF.E-PPS-MM2.5.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Geberit Silent dB 20	≤ Ø 110	6.0	Multicollar Slim	EI 60 U/U

B.1.8 Multimortar + Multimastic FB - ≥ 100 mm - Combustible pipes

B.1.8.3 PP-R Multilayer pipes

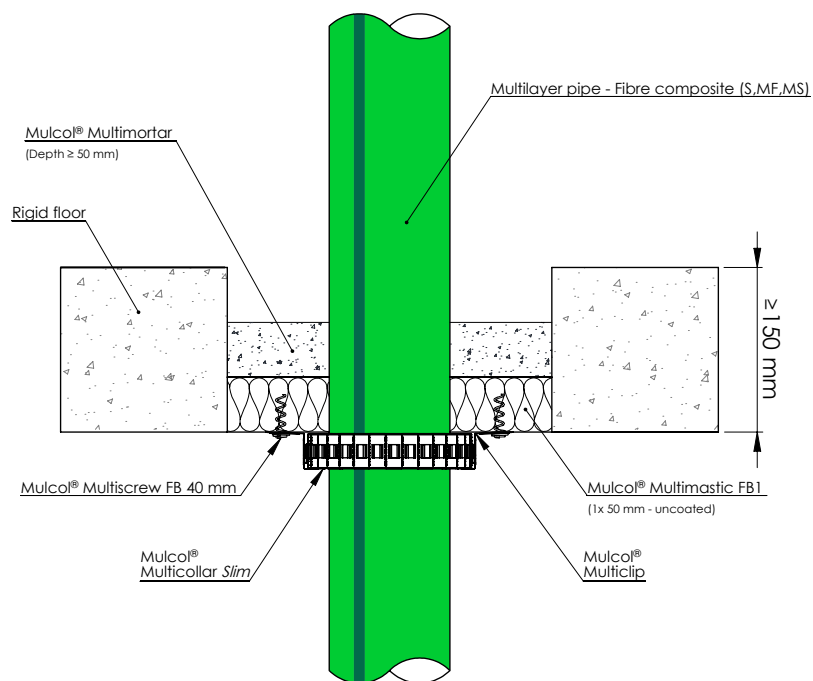
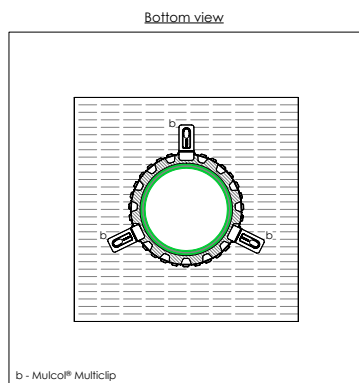


Drawing: RF.E-MC30-MLF-MM2.5.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Green	$\leq \varnothing 50$	6.9	Multicollar <i>Slim</i>	EI 60 U/C
Aquatherm Blue	$\leq \varnothing 110$	10.0		

B.1.9 Multimortar + Multimastic FB - ≥ 150 mm - Combustible pipes

B.1.9.1 Plastic pipes

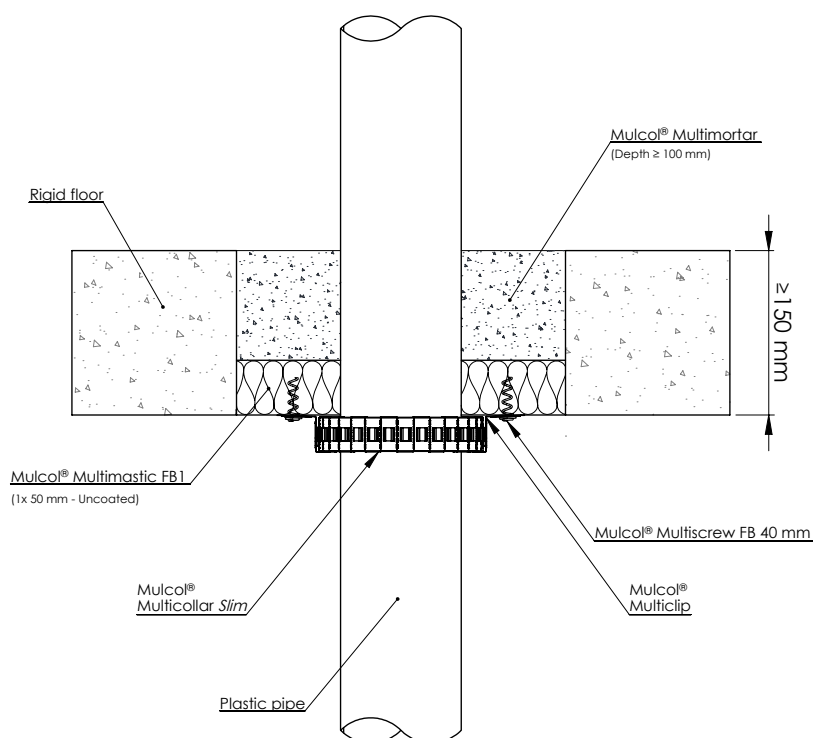
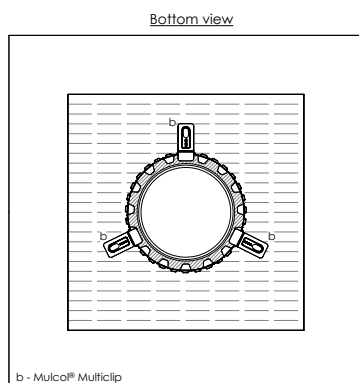


Drawing: RF.E-MC30-PP-MM2.7.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
PE-HD / PE-X / ABS / SAN+PVC	$\leq \varnothing 110$	2.7	Multicollar Slim	EI 120 U/U
		2.7 - 3.1		EI 120 U/C
PP	$\leq \varnothing 125$	3.1		EI 60 U/U
PVC(-U/-C)	$\leq \varnothing 110$	2.7 - 6.6		
		2.7 - 6.3		

B.1.9 Multimortar + Multimastic FB - ≥ 150 mm - Combustible pipes

B.1.9.2 Plastic pipes (Silent)

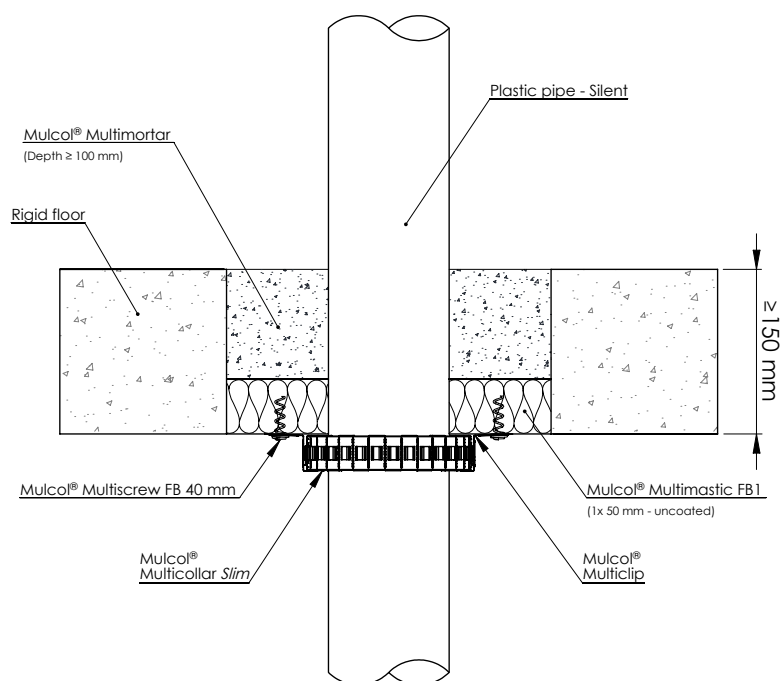
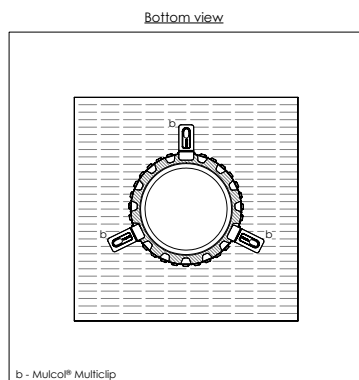


Drawing: RF.E-MC30-PPS-MM2.7.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Geberit Silent dB 20	$\leq \varnothing 110$	6.0	Multicollar <i>Slim</i>	EI 60 U/U

B.1.9 Multimortar + Multimastic FB - ≥ 150 mm - Combustible pipes

B.1.9.3 PP-R Multilayer pipes

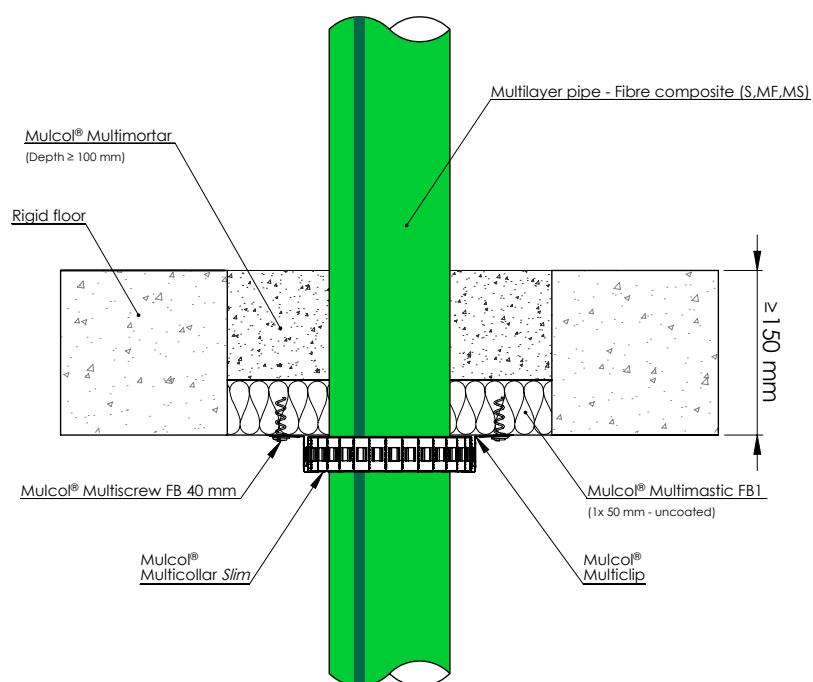
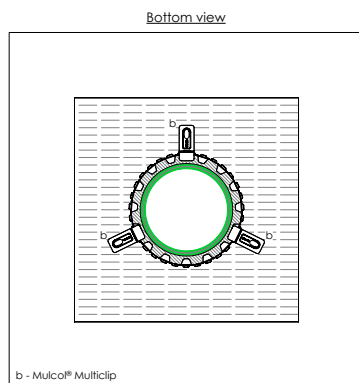


Drawing: RF.E-MC30-MLF-MM2.7.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Green	$\leq \varnothing 50$	6.9	Multicollar <i>Slim</i>	EI 60 U/C
Aquatherm Blue	$\leq \varnothing 110$	10.0		

B.1.9 Multimortar + Multimastic FB - ≥ 150 mm - Combustible pipes

B.1.9.4 Drinks tubing system

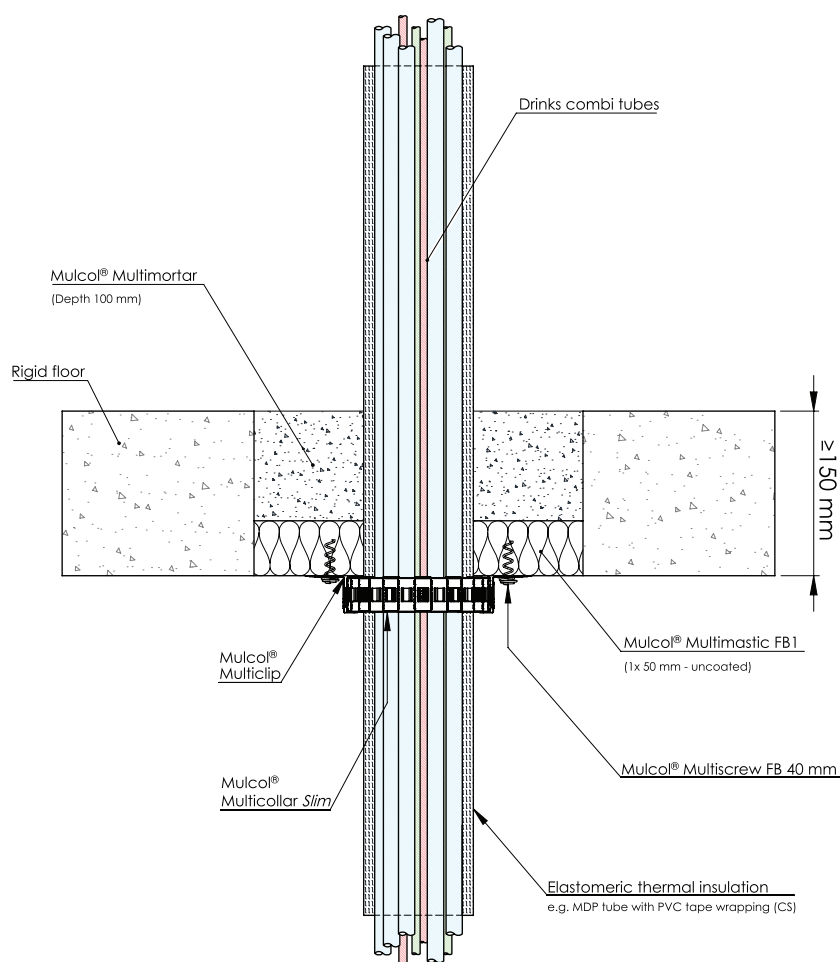
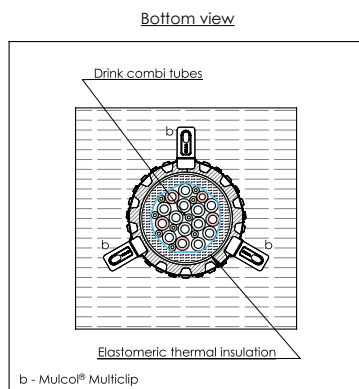


Drawing: RF.E-DCP25-MM2.2.10

Services	Dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Hoses no.	Type	Thickness (mm)	Configuration		
Drinks tubing system	$\leq \varnothing 145$	≤ 52	Elastomeric foam	8 - 35	CS	Multicollar <i>Slim</i>	EI 120 U/C

B.1.10 Directly through floor - Combustible pipes

B.1.10.1 Plastic pipes

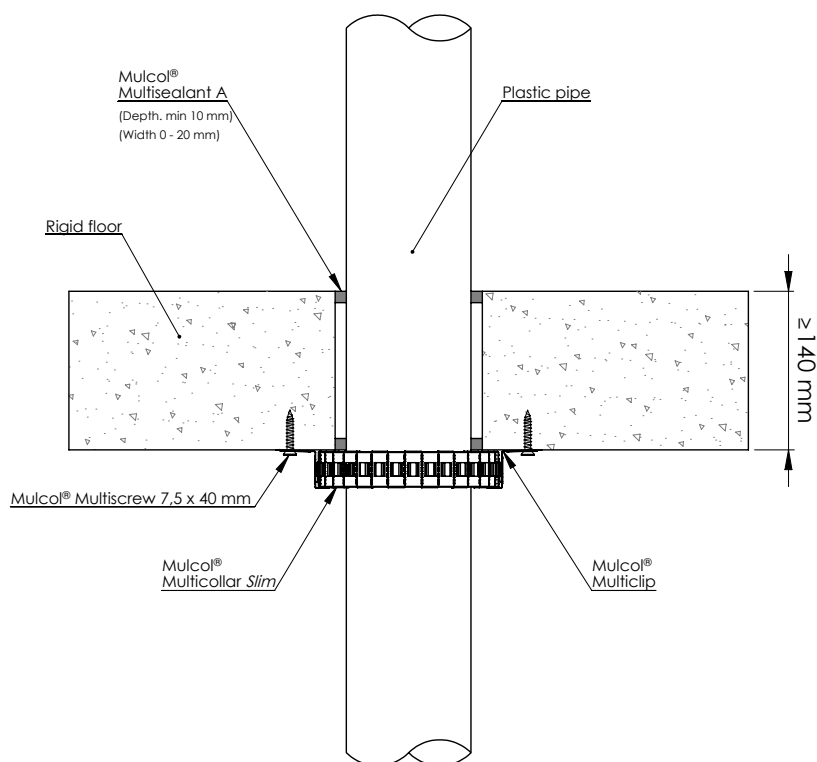

Drawing: RF.E-MC30-PP-11.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE-HD / PE-X / ABS / SAN+PVC	≤ Ø 40	2.4 - 6.6	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U
		2.7 - 6.6			EI 90 U/U
	≤ Ø 110	6.6			EI 120 U/U
		6.6 - 14.6			EI 120 U/C
		4.0			EI 60 U/U
	≤ Ø 160	4.0 - 14.6			EI 60 U/C
		14.6			EI 120 U/C



B.1.10 Directly through floor - Combustible pipes

B.1.10.1 Plastic pipes

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PP	≤ Ø 40	1.8 - 6.3	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U
	≤ Ø 110	2.7 - 6.3			EI 90 U/U
		6.3 - 14.6			EI 90 U/C
		14.6			EI 120 U/C
	≤ Ø 125	3.1 - 4.0			EI 90 U/U
		4.0 - 4.8			EI 60 U/U
		4.0 - 14.6			EI 90 U/C
		14.6			EI 120 U/C
	≤ Ø 160	4.0			EI 90 U/U
		4.0 - 14.6			EI 90 U/C
		14.6			EI 120 U/C
Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PVC(-U/-C)	≤ Ø 40	1.9 - 8.2	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U
	≤ Ø 110	2.2 - 8.2			EI 120 U/U
		8.2 - 14.6			EI 120 U/C
	≤ Ø 125	2.5 - 4.0			EI 60 U/U
		4.0 - 14.6			EI 60 U/C
	≤ Ø 160	1.8 - 4.0			EI 30 U/U
		4.0			EI 60 U/U
		4.0 - 14.6			EI 60 U/C
		14.6			EI 120 U/C

B.1.10 Directly through floor - Combustible pipes

B.1.10.2 Plastic pipes - double Multicollar *Slim*

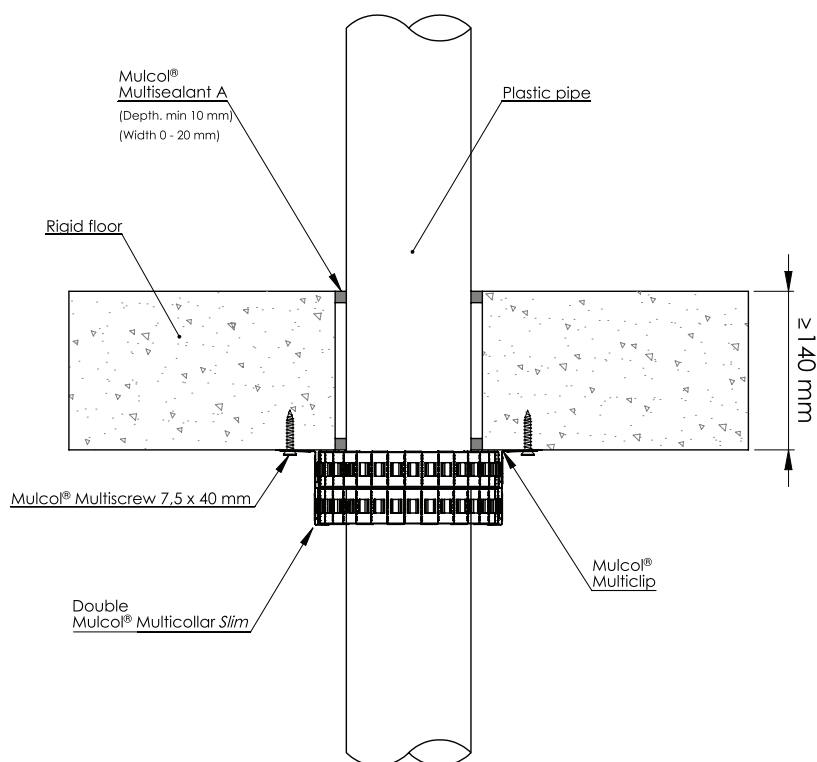



Drawing: RF.E-MC60-PP-11.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE-HD / PE-X / ABS / SAN+PVC	≤ Ø 160	4.0	Multicollar <i>Slim</i> double	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/U
		4.0 - 14.6			EI 90 U/C
PVC(-U/-C)	≤ Ø 250	7.7			EI 90 U/U
	≤ Ø 160	3.2 - 11.8			EI 120 U/C
		7.7 - 14.6			
	≤ Ø 315	7.7			

B.1.10 Directly through floor - Combustible pipes

B.1.10.3 Plastic pipes perpendicular to 45°

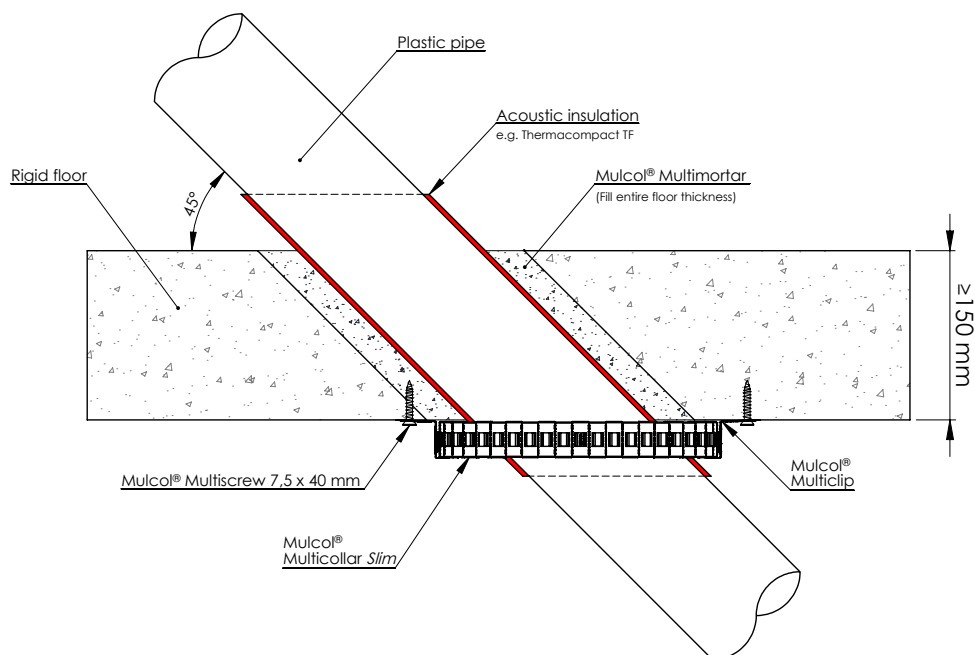
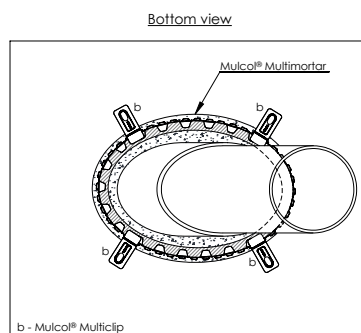


Drawing: RF.E-MC30o-PP-11.1.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE-HD / PE-X / ABS / SAN+PVC	≤ Ø 110	3.4	Multicollar Slim	Multimortar	EI 60 U/U

B.1.10 Directly through floor - Combustible pipes

B.1.10.4 Plastic pipes perpendicular to 45° - double Multicollar *Slim*

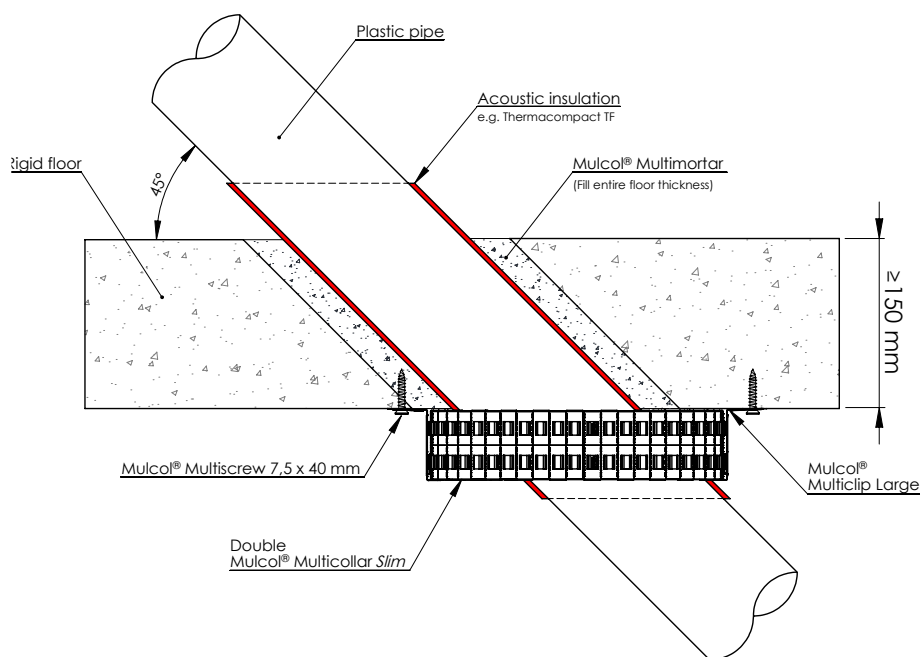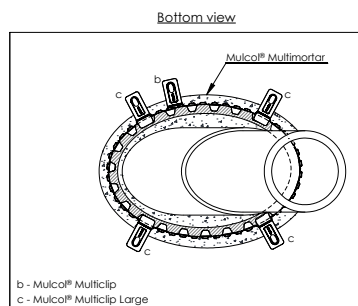


Drawing: RF.E-MC60o-PP-21.1.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE-HD / PE-X / ABS / SAN+PVC	≤ Ø 110	3.4 - 10.0	Multicollar <i>Slim</i> double	Multimortar	EI 60 U/U
		10.0			EI 90 U/U
PP		3.4			EI 120 U/U
		3.4 - 10.0			EI 90 U/U
PVC(-U/-C)		10.0			EI 60 U/U
					EI 90 U/U

B.1.10

B.1.10.5

b - Mulcol® Multiclip
c - Mulcol® Multiclip Large

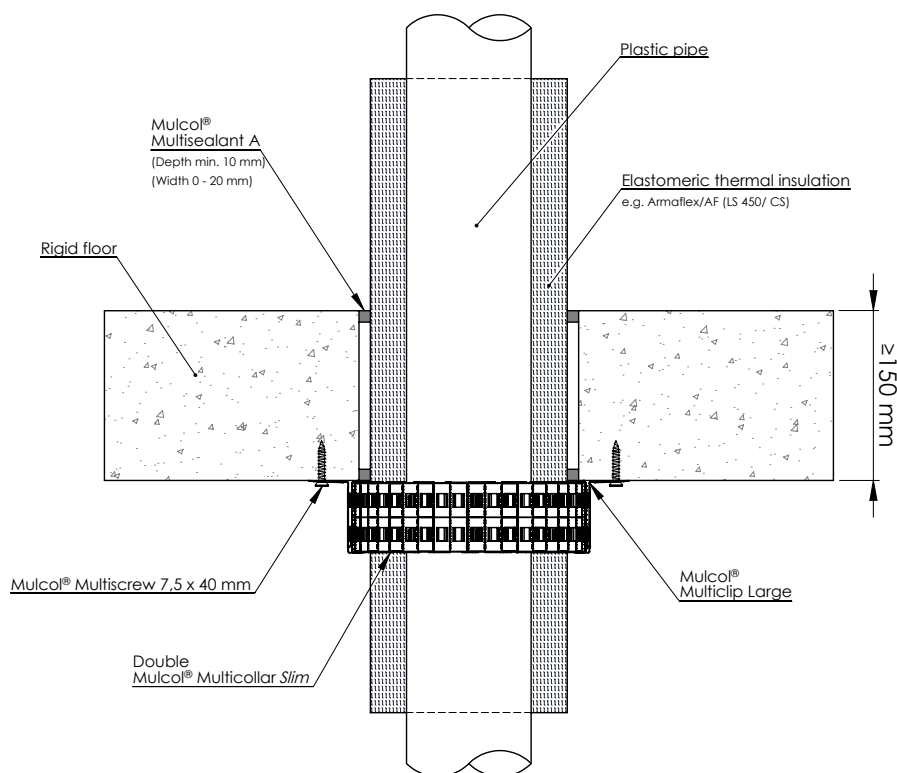



Drawing: RF.E-MC60-PP-21.0.22

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration			
PVC(-U/-C)	≤ Ø 110	3.2	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	9 - 32	LS 450 / CS LI 450 / CI	Multicollar <i>Slim</i> double	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U

B.1.10 Directly through floor - Combustible pipes

B.1.10.6 Plastic pipes - Multicollar *Slim* recessed into soffit

Bottom view

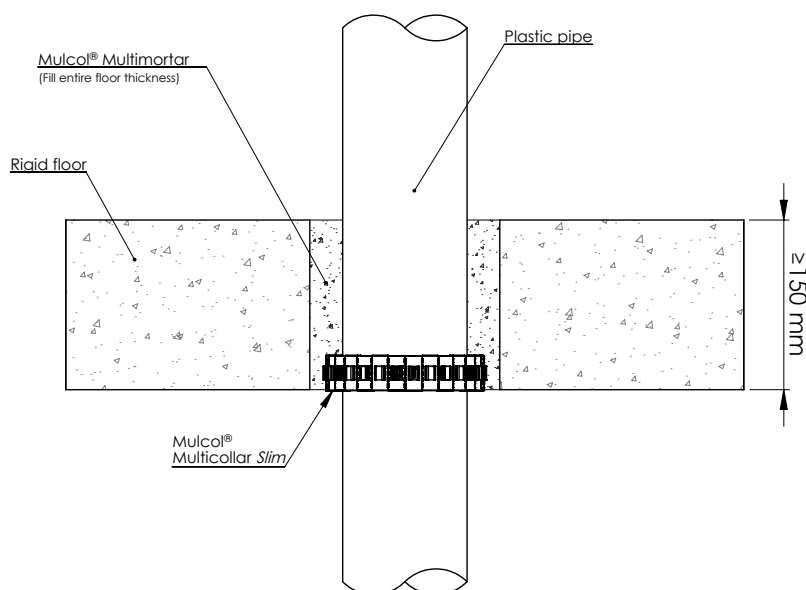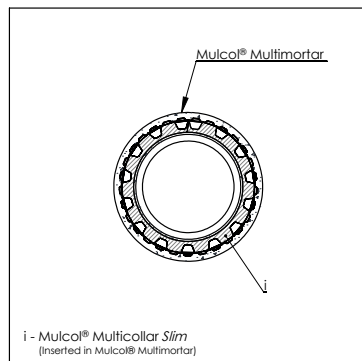



Drawing: RF.E-MC30i-PP-15.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PP	≤ Ø 110	6.3	Multicollar <i>Slim</i>	Multimortar	EI 30 U/U

B.1.10 Directly through floor - Combustible pipes

B.1.10.7 Plastic pipes with socket

Bottom view

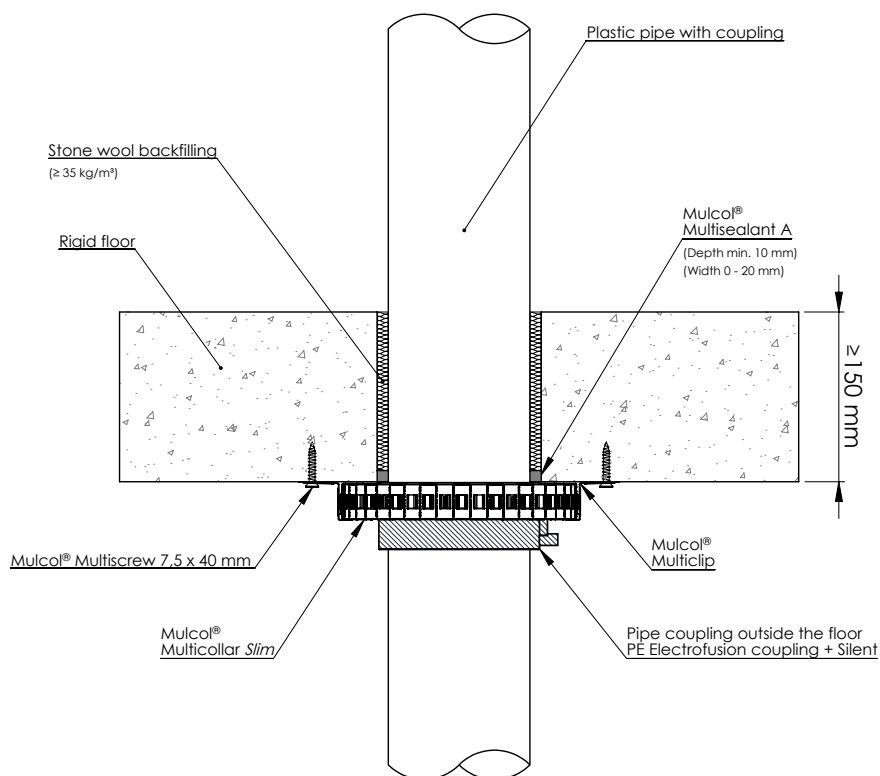
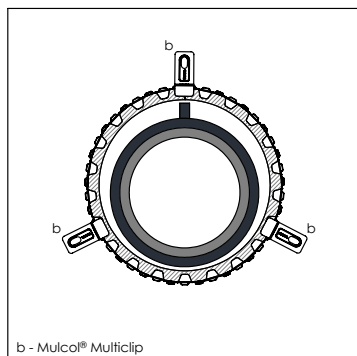


Drawing: RF.E-MC30-PP-11.0.60

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE-HD / PE-X / ABS / SAN+PVC	≤ Ø 110	4.3	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/C
	≤ Ø 125	7.4			EI 60 U/C

B.1.10 Directly through floor - Combustible pipes

B.1.10.8 Plastic pipes with elbow and U-shape Multicollar *Slim*

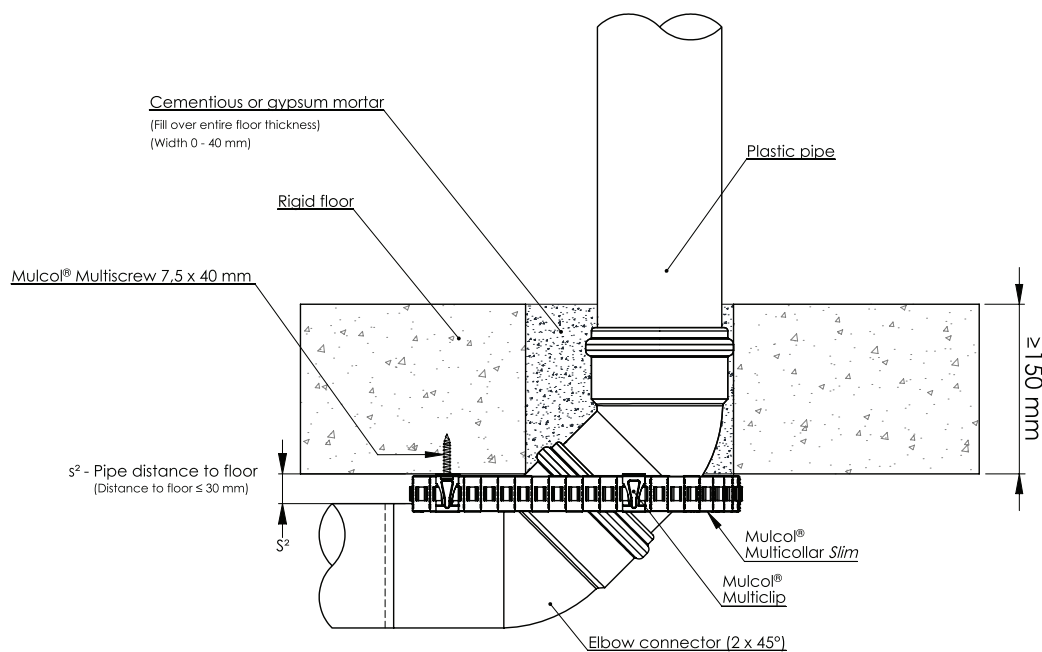
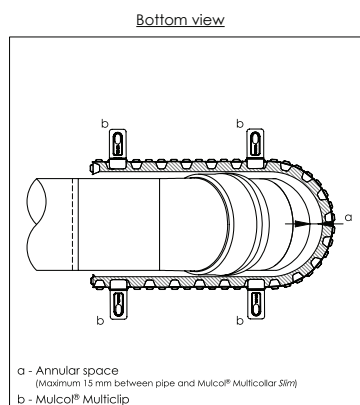


Drawing: RF.E-MC30u-MM1.3.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PVC(-U/-C)	≤ Ø 50	3.0	Multicollar <i>Slim</i>	Multimortar	EI 90 U/U
	≤ Ø 110	3.2			EI 45 U/U, E 60 U/U

B.1.10 Directly through floor - Combustible pipes

B.1.10.9 Plastic pipes in corner

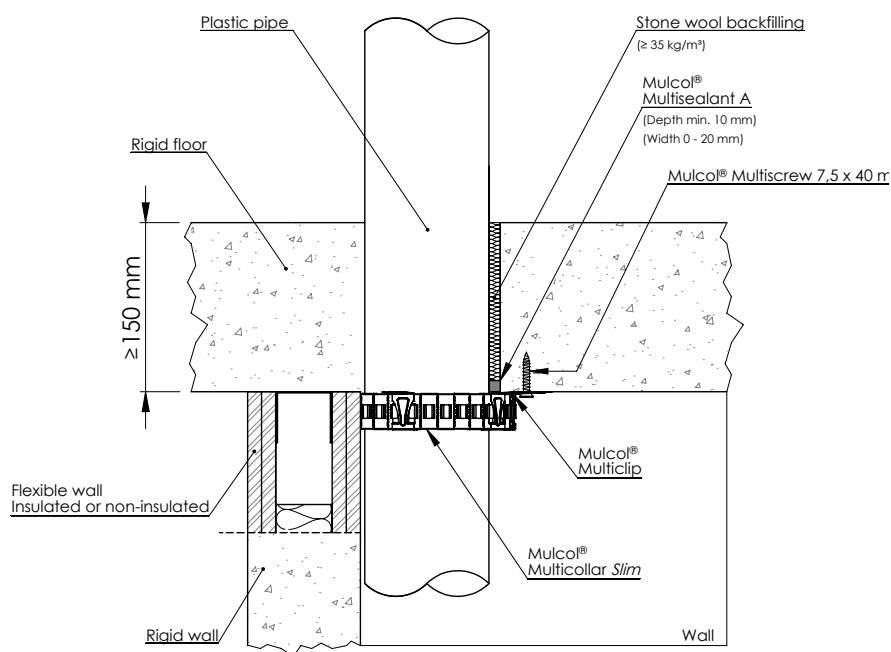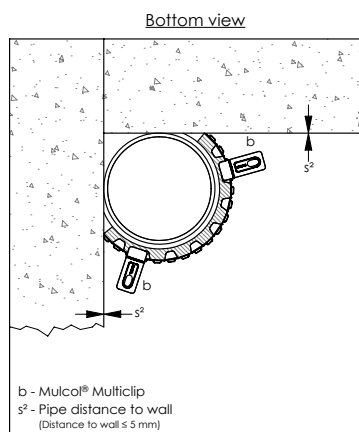



Drawing: RF.E-MC30c-PP-31.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE-HD / PE-X / ABS / SAN+PVC	≤ Ø 110	6.6	Multicollar Slim	Multimastic SP 0-30 x ≥ 10 (wxd)	EI 120 U/U
PP		6.3			EI 90 U/U
PVC(-U/-C)	≤ Ø 125	7.4			EI 60 U/C

B.1.10 Directly through floor - Combustible pipes

B.1.10.10 Plastic pipes (Silent)

Bottom view

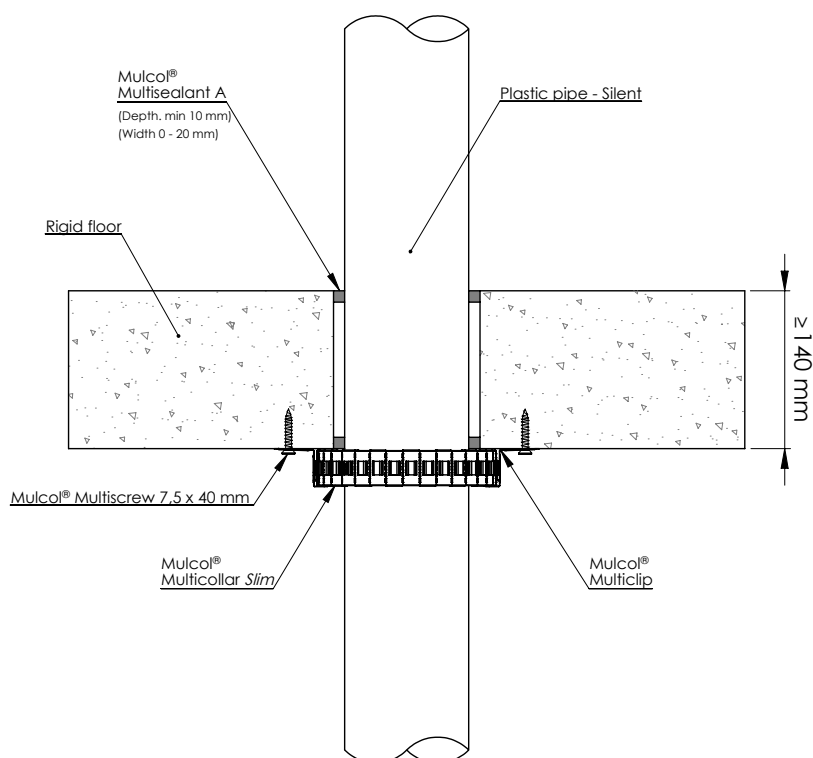
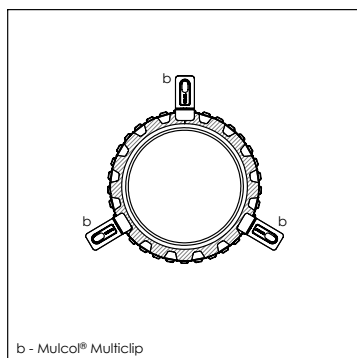


Drawing: RF.E-MC30-PPS-11.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB 20	$\leq \varnothing 56$	3.2 - 7.0	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U
	$\leq \varnothing 110$	6.0 - 7.0			
	$\leq \varnothing 160$	7.0			
Raupiano Plus	$\leq \varnothing 50$	1.8 - 4.0			
	$\leq \varnothing 110$	2.7 - 4.0			
	$\leq \varnothing 160$	4.0			
Wavin SiTech+	$\leq \varnothing 110$	3.6			

B.1.10 Directly through floor - Combustible pipes

B.1.10.11 Plastic pipes (Silent) perpendicular to 45° - double Multicollar *Slim*

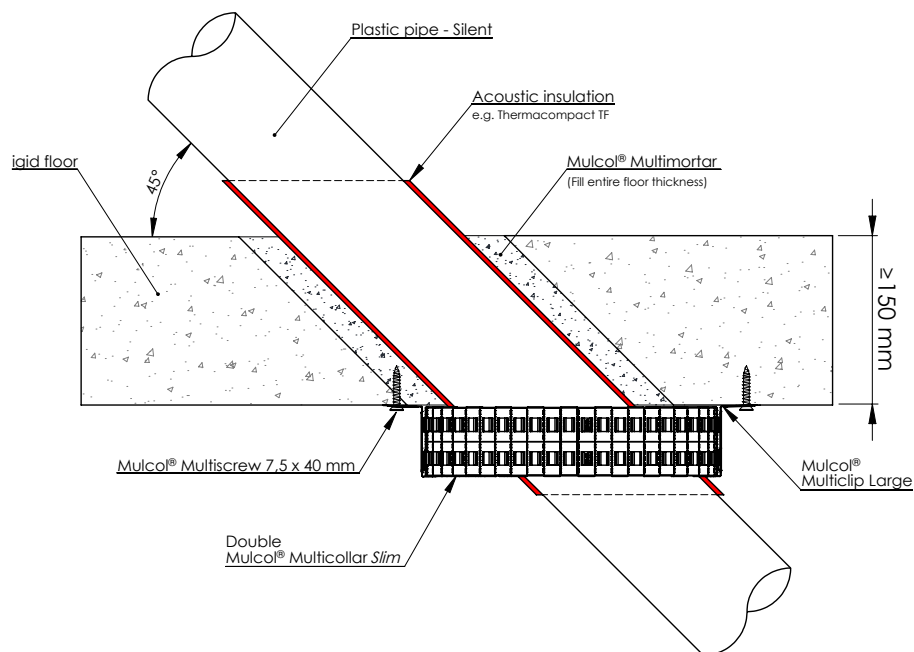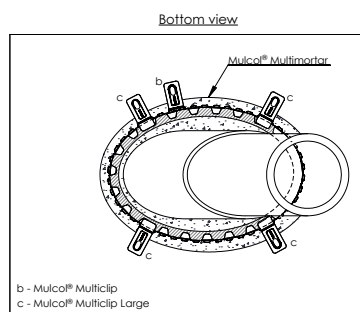



Drawing: RF.E-MC60o-PPS-21.1.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB 20	≤ Ø 110	6.0	Multicollar <i>Slim</i> double	Multimortar	EI 120 U/U

B.1.10 Directly through floor - Combustible pipes

B.1.10.12 Plastic pipes (Silent) with socket

Bottom view

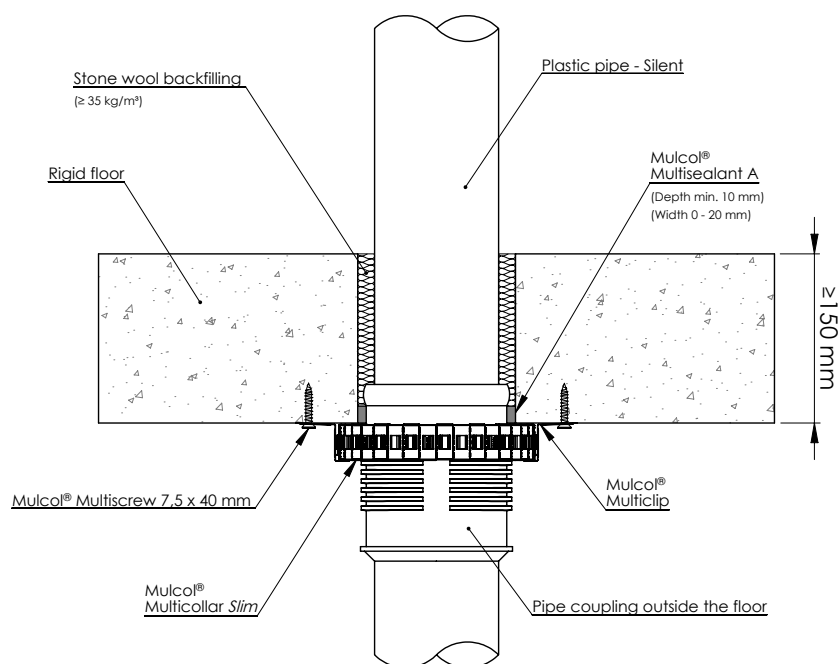
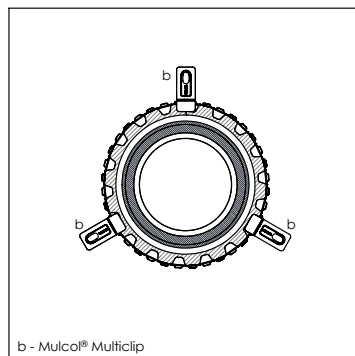


Drawing: RF.E-MC30-PPS-11.0.60

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB 20	≤ Ø 110	6.0	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/C
Raupiano Plus		2.7			
Wavin SiTech+		3.6			EI 90 U/U

B.1.10 Directly through floor - Combustible pipes

B.1.10.13 Plastic pipes (Silent) with elbow

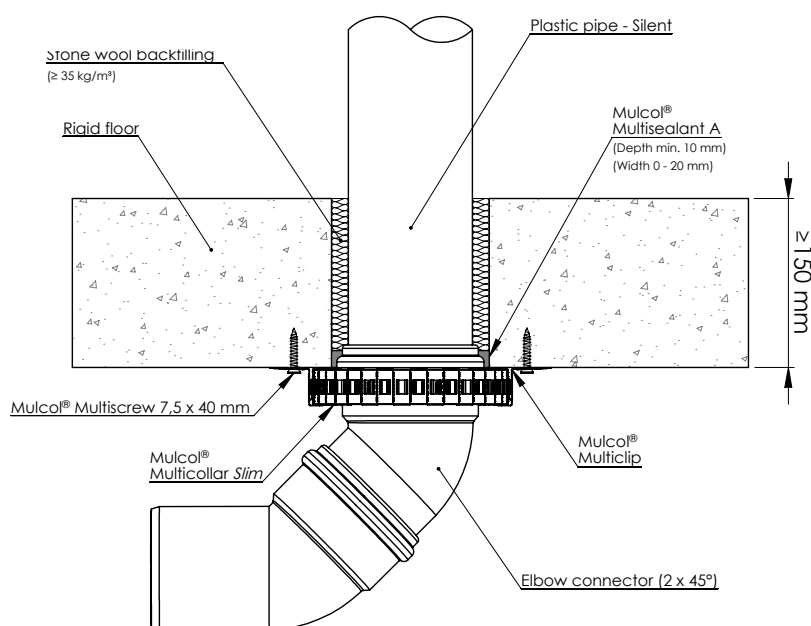
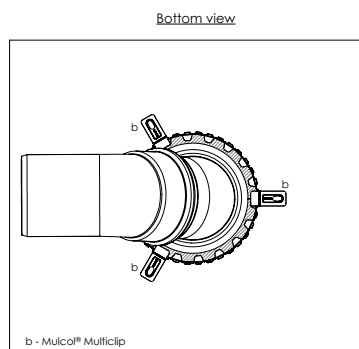


Drawing: RF.E-MC30-PPS-11.0.80

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB 20	$\leq \varnothing 110$	6.0	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/U
Wavin AS		5.3			EI 120 U/U

B.1.10 Directly through floor - Combustible pipes



B.1.10.14 Plastic pipes (Silent) with elbow and U-shape Multicollar *Slim*

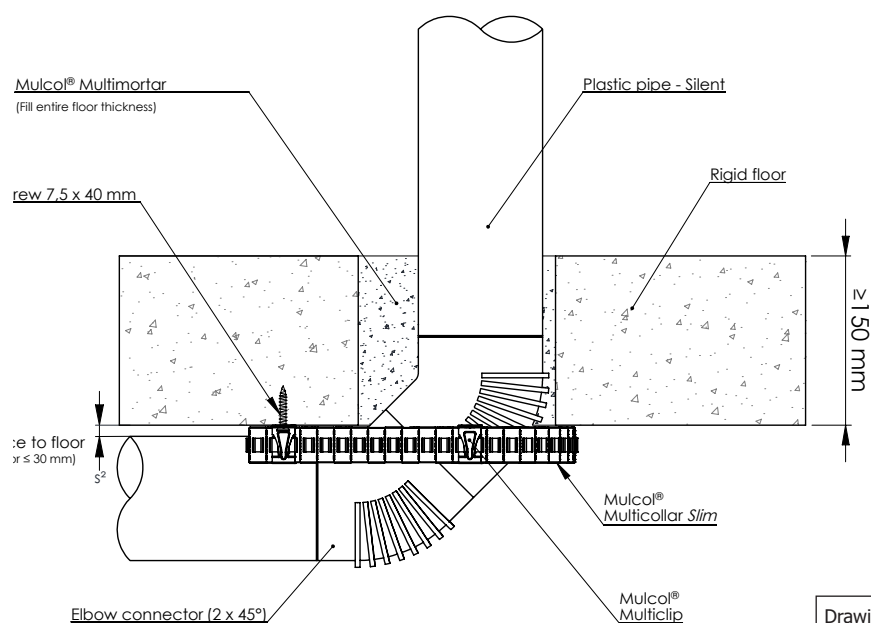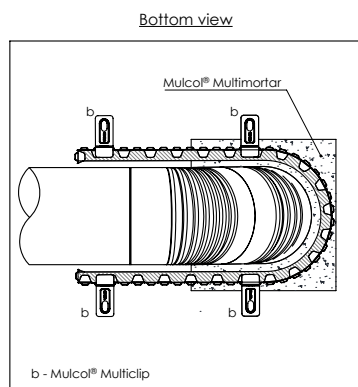

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB 20	≤ Ø 110	6.0	Multicollar <i>Slim</i>	Multimortar	EI 90 U/U

B.1.10 **Directly through floor - Combustible pipes**

B.1.10.15 **Plastic pipes (Silent) in corner**

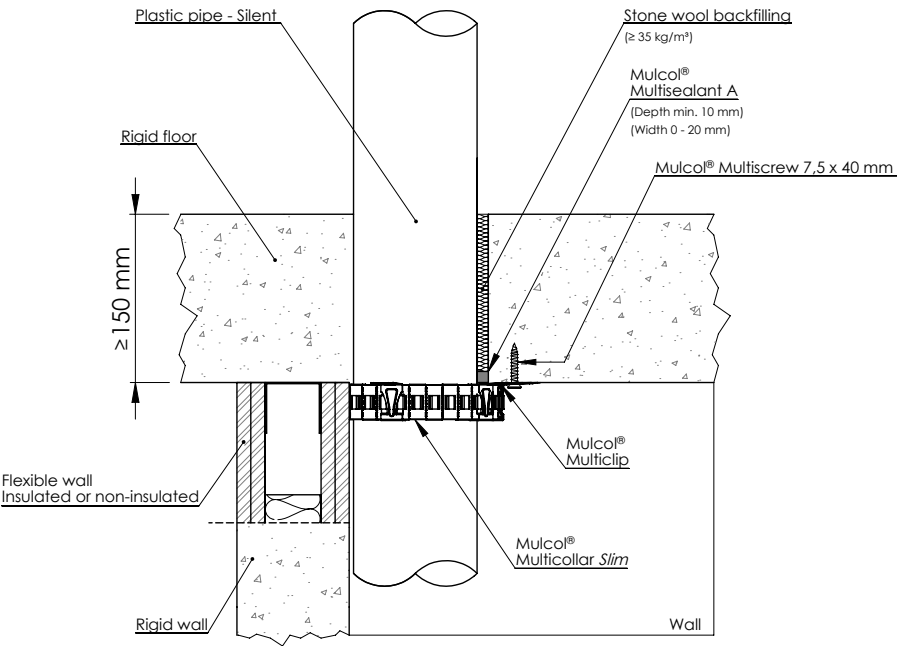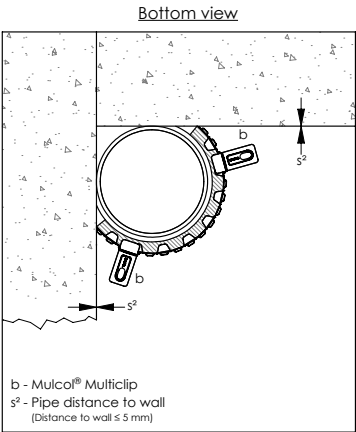



Drawing: RF.E-MC30c-PPS-31.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB 20	≤ Ø 110	6.0	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/C

B.1.10 Directly through floor - Combustible pipes

B.1.10.16 PP-R Multilayer pipes

Bottom view

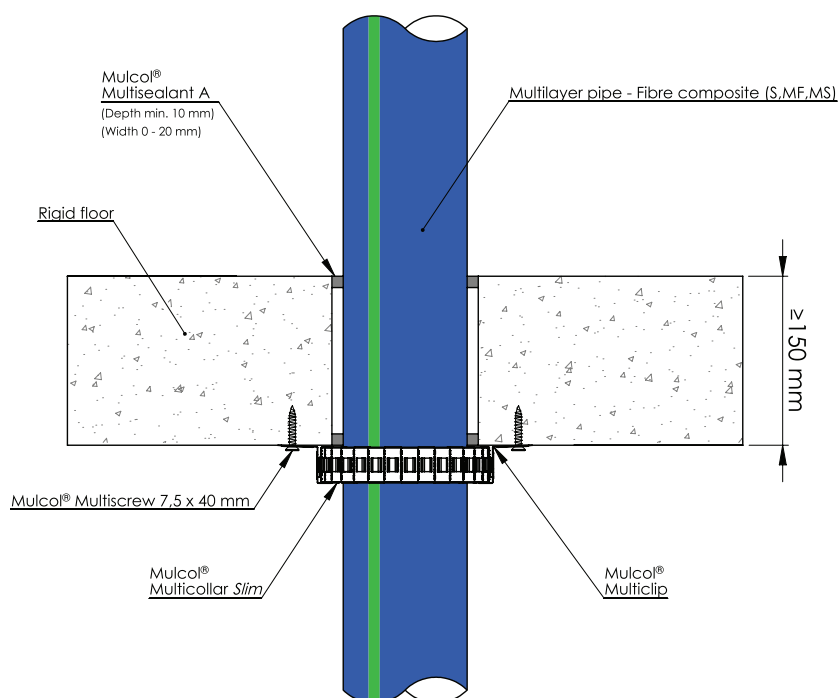
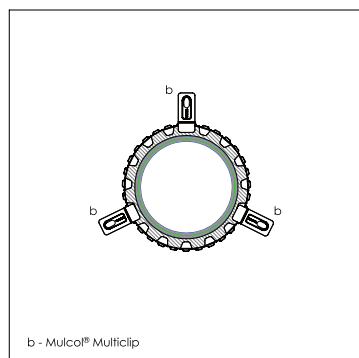


Drawing: RF.E-MC30-MLF-MM1.3.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Aquatherm Blue-MF	≤ Ø 20	2.8	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/C
	≤ Ø 110	10.0 - 14.6			EI 90 U/C
	≤ Ø 160	14.6			EI 120 U/C
Aquatherm Red-MF	≤ Ø 110	15.1			
Aquatherm Blue-MF	≤ Ø 250	22.7	Multicollar <i>Slim</i> double		

B.1.10 Directly through floor - Combustible pipes

B.1.10.17 PP-R Multilayer pipes - Elastomer LS-LI 300 / CS-CI

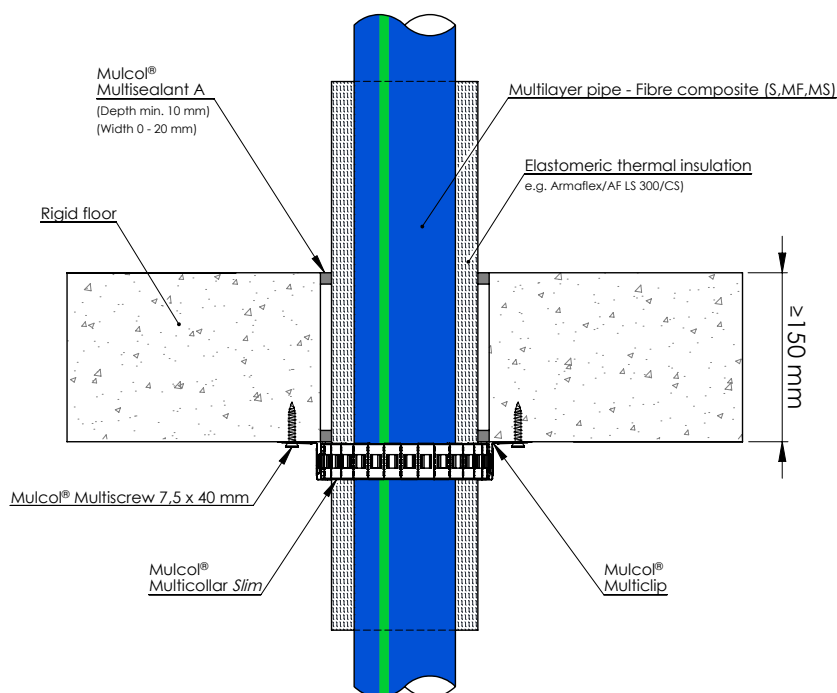
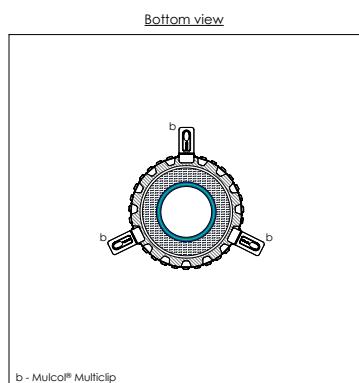


Drawing: RF.E-MC30-MLF-11.0.22

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration			
Aquatherm Green-MF	≤ Ø 110	18.3	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	9 - 32	LS 300 / CS LI 300 / CI	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/C
		15.2						
		15.1						
Aquatherm Blue-MF	≤ Ø 20	2.8						
	≤ Ø 110	10.0						

B.1.10 Directly through floor - Combustible pipes

B.1.10.18 PP-R Multilayer pipes in corner

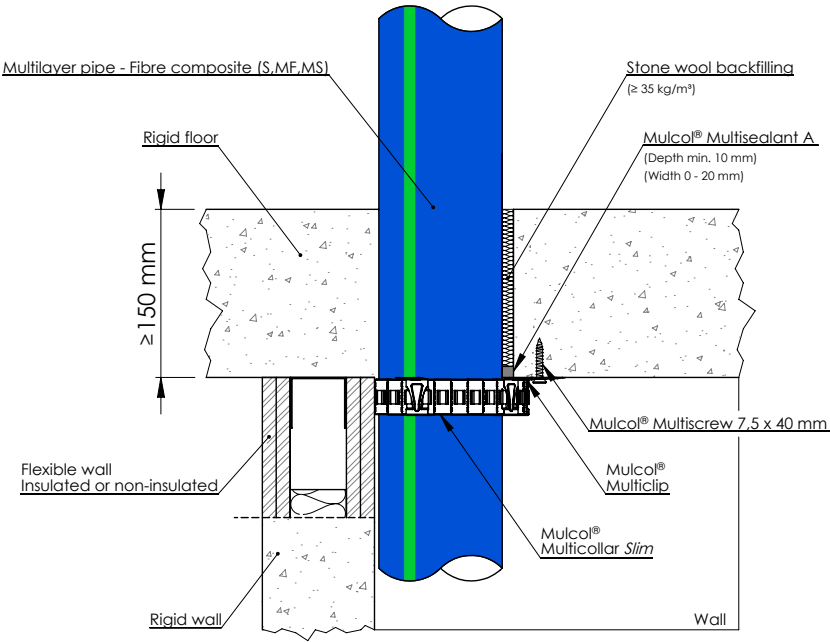
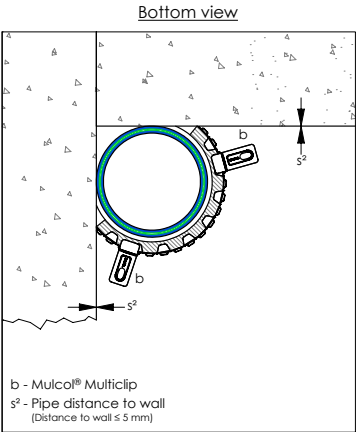


Drawing: RF.E-MC30c-MLF-31.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Aquatherm Blue-MF	≤ Ø 110	10.0	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 wxd)	EI 90 U/C

B.1.11 Multimortar - ≥ 150 mm - Multilayer pipes (MLC)

B.1.11.1 Multilayer pipes (MLC)

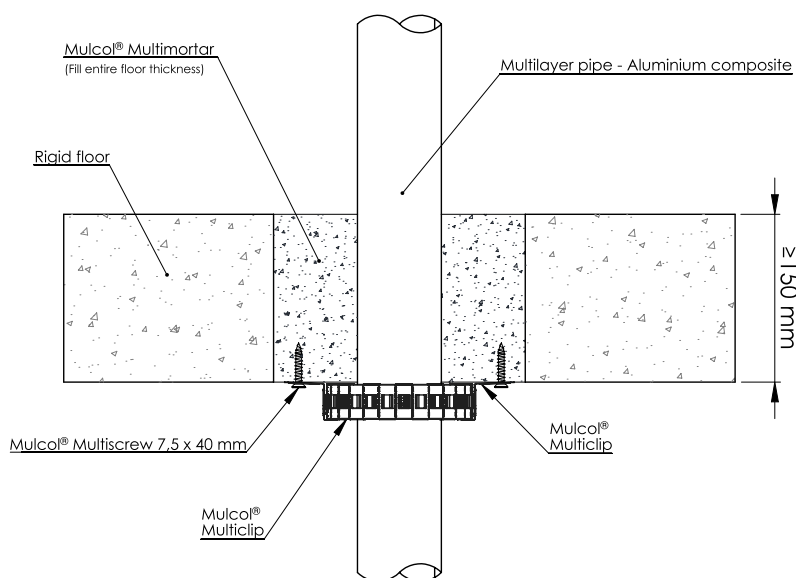
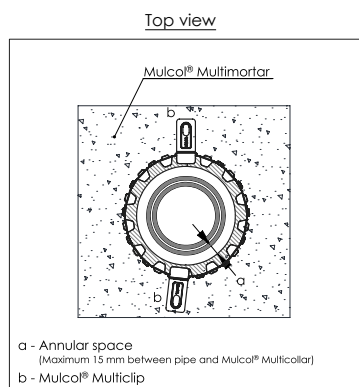


Drawing: RF.E-MC30-MLA-MM1.3.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Multilayer pipes (MLC)	$\leq \varnothing 20$	2.0	Multicollar <i>Slim</i>	EI 120 U/C
	$\leq \varnothing 25$	3.5		
	$\leq \varnothing 32$	3.0		
	$\leq \varnothing 50$	4.0		EI 60 U/C, E 120 U/C
	$\leq \varnothing 63$	4.5		
	$\leq \varnothing 75$	6.0		

B.1.11 Multimortar - ≥ 150 mm - Multilayer pipes (MLC)

B.1.11.2 Multilayer pipes (MLC) - double Multicollar *Slim*

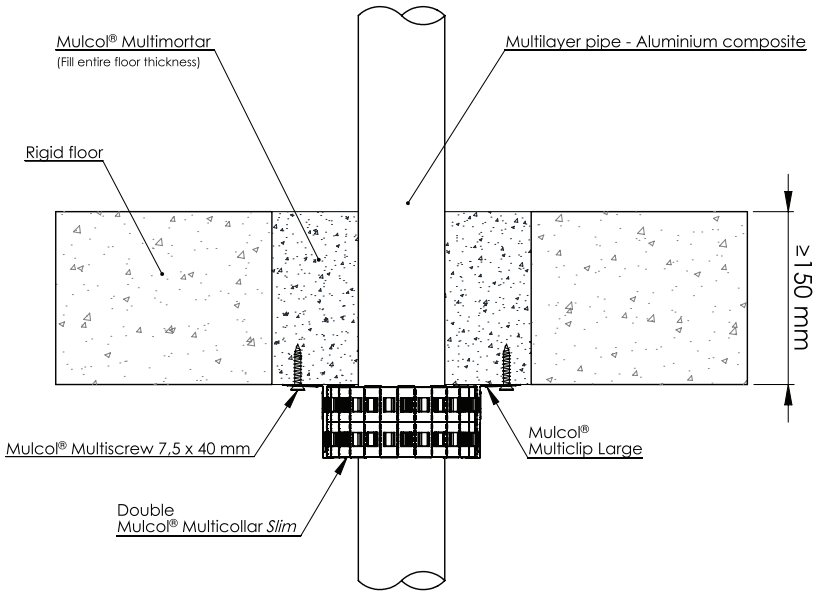
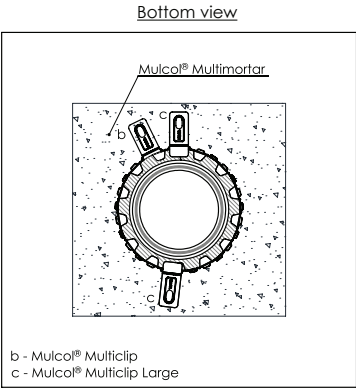


Drawing: RF.E-MC60-MLA-MM1.3.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Multilayer pipes (MLC)	$\leq \varnothing 63$	4.5	Multicollar <i>Slim</i> double	EI 90 U/C
	$\leq \varnothing 75$	6.0		

B.1.11 Multimortar - ≥ 150 mm - Multilayer pipes (MLC)

B.1.11.3 Multilayer pipes (MLC) - PE foam LS-LI 300 / CS-CI

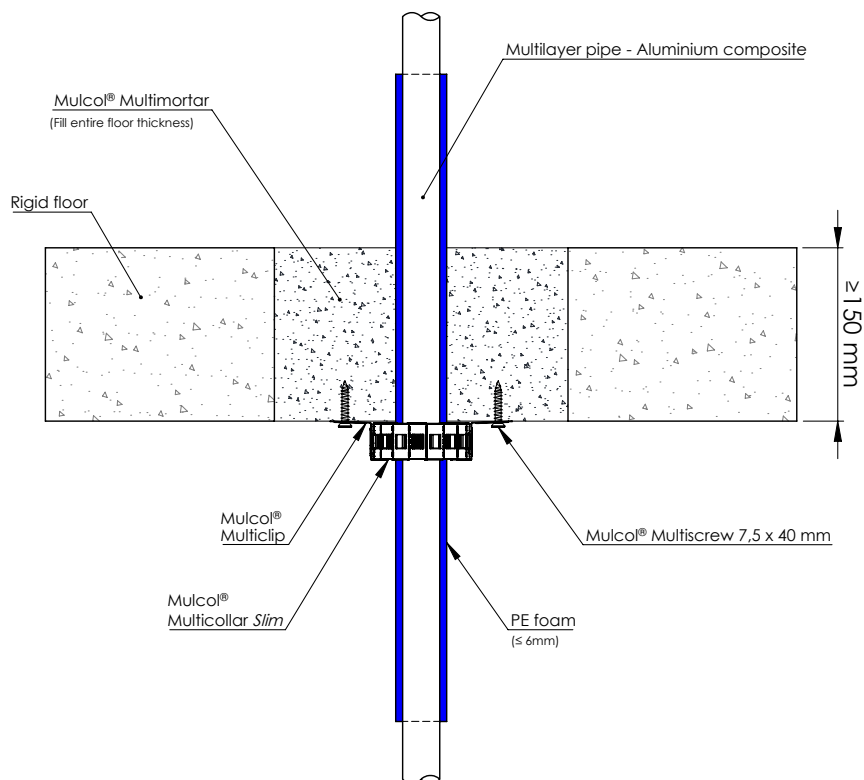
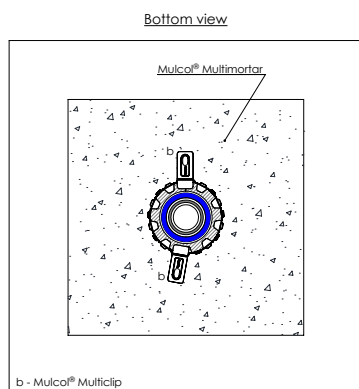


Drawing: RF.E-MC30-MLA_pr-MM1.3.23

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 32$	3.0	PE foam	6	LS 300 / CS LI 300 / CI	Multicollar Slim	EI 120 U/C

B.1.11 Multimortar - ≥ 150 mm - Multilayer pipes (MLC)

B.1.11.4 Multilayer pipes (MLC) - PE conduit

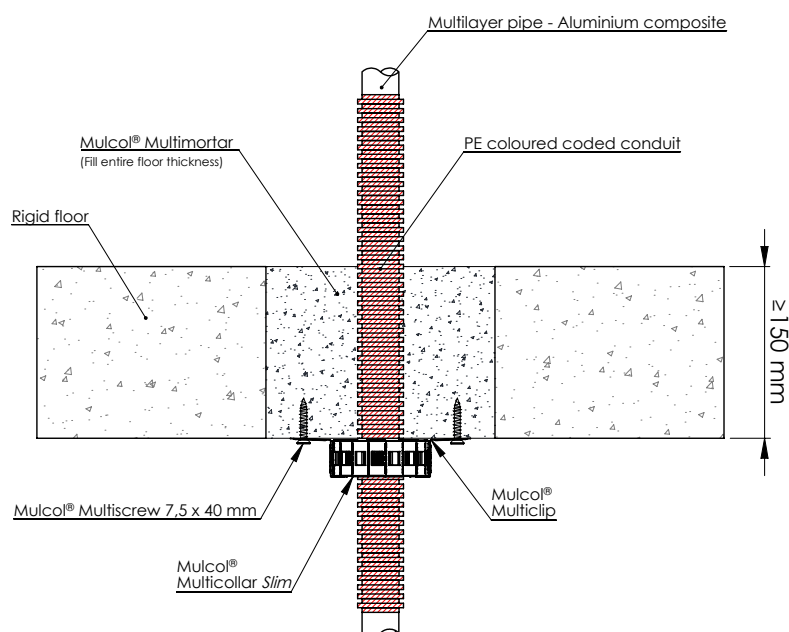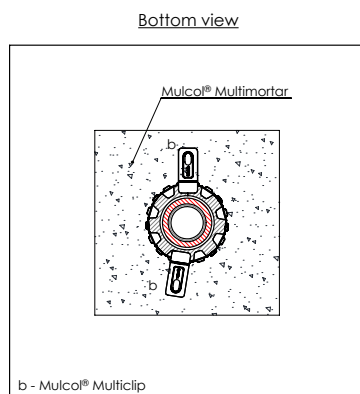



Drawing: RF.E-MC30-MLA-MM1.3.30

Services	Pipe dimensions (mm)		Conduit			Product	Classification
	Outer dimensions	Wall thickness	Type	Outer dimension (mm)	Configuration		
Multilayer pipes (MLC)	$\leq \varnothing 32$	3.0	PE-conduit ribbed	40	LS 50 / CS	Multicollar <i>Slim</i>	EI 120 U/C

B.1.12 Directly through floor - Multilayer pipes (MLC)

B.1.12.1 Multilayer pipes (MLC)

Bottom view

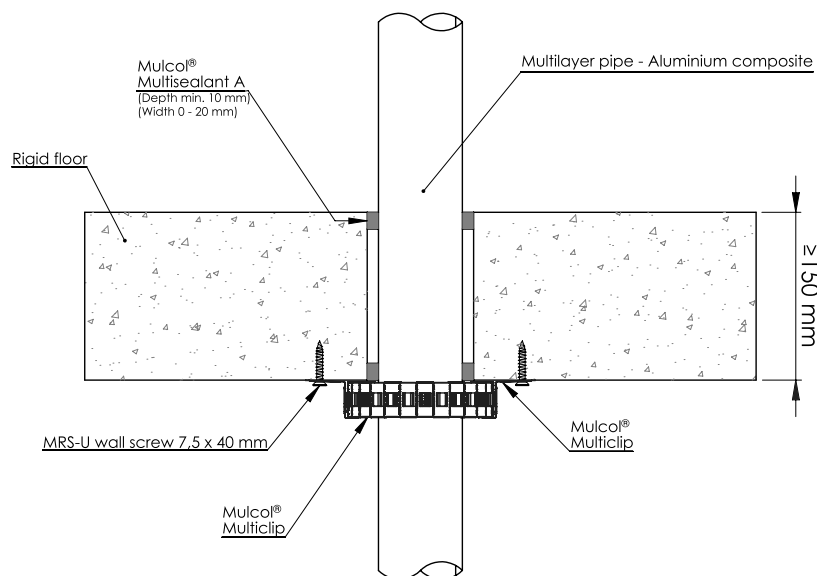
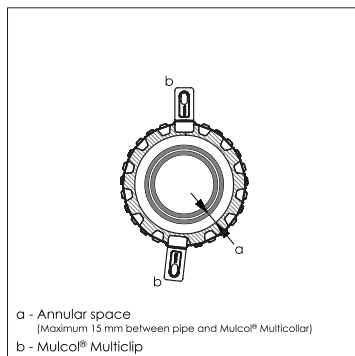


Drawing: RF.E-MLA-11.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Multilayer pipes (MLC)	≤ Ø 20	2.0	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 wxd)	EI 120 U/C
	≤ Ø 25	3.5			
	≤ Ø 32	3.0			
	≤ Ø 50	4.0			
	≤ Ø 63	4.5			EI 60 U/C, E 120 U/C
	≤ Ø 75	6.0			

B.1.12 Directly through floor - Multilayer pipes (MLC)

B.1.12.2 Multilayer pipes (MLC) - double Multicollar *Slim*

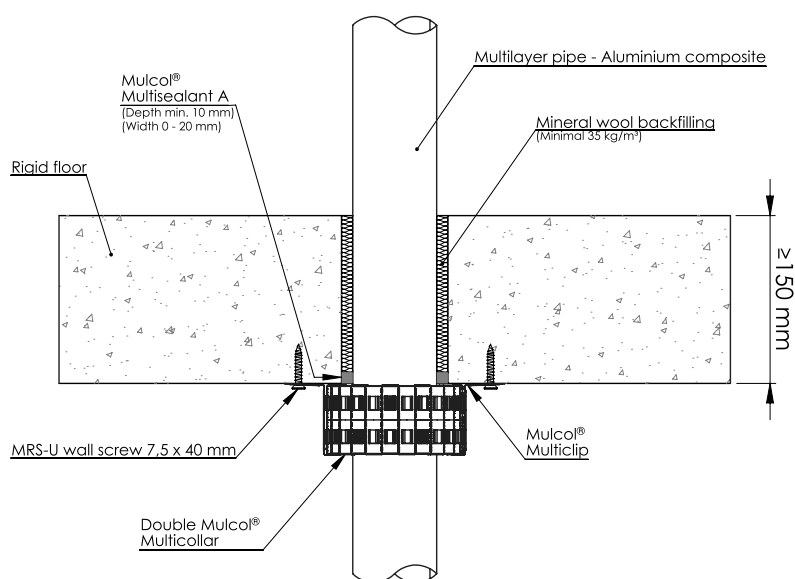
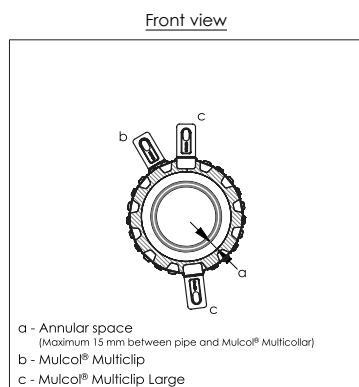


Drawing: RF.E-MLA-21.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Multilayer pipes (MLC)	≤ Ø 63	4.5	Multicollar <i>Slim</i> double	Multimastic SP 0-20 x ≥ 10 wxd)	EI 90 U/C
	≤ Ø 75	6.0			

B.1.12 Directly through floor - Multilayer pipes (MLC)

B.1.12.3 Multilayer pipes (MLC) - PE foam LS-LI 300 / CS-CI

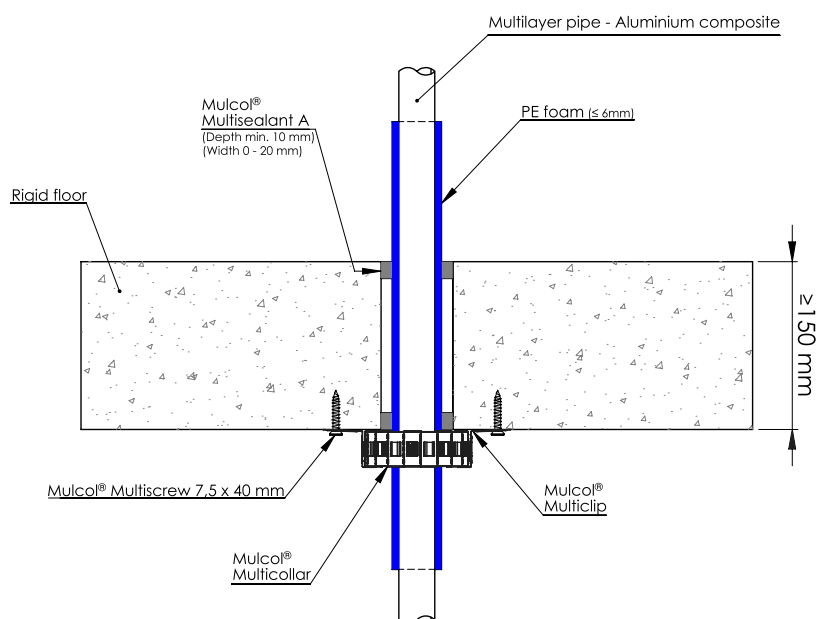
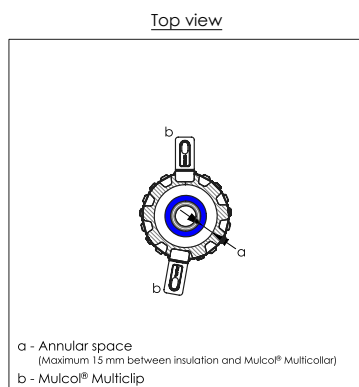


Drawing: RF.E-MLA_pr-11.0.22

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration			
Multilayer pipes (MLC)	≤ Ø 32	3.0	PE foam	6	LS 300 / CS LI 300 / CI	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/C

B.1.12 Directly through floor - Multilayer pipes (MLC)

B.1.12.4 Multilayer pipes (MLC) - Elastomer LS-LI 500 / CS-CI

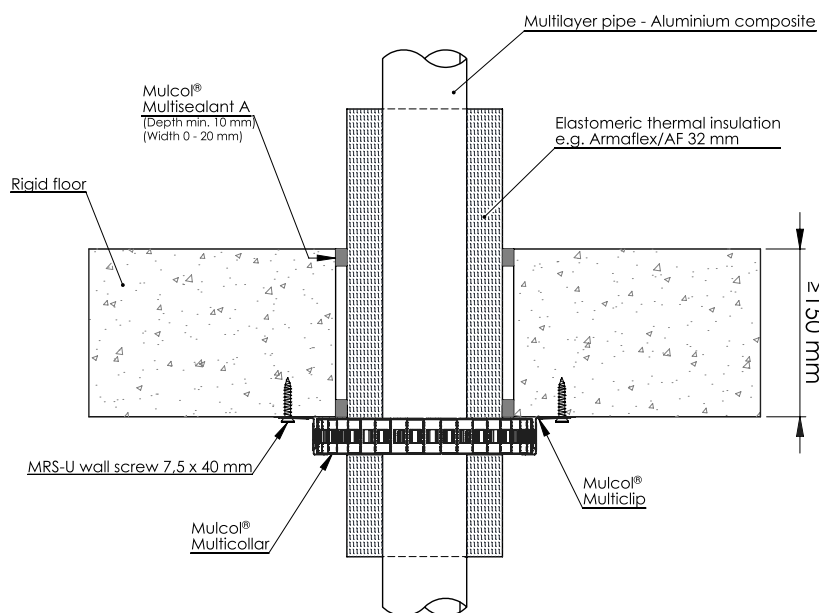
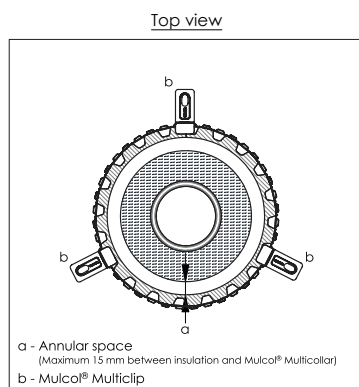


Drawing: RF.E-MC30-MLA_pr-MM1.3.23

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Classification	
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration				
Multilayer pipes (MLC)	≤ Ø 20	2.0	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	9 - 32	LS 500 / CS LI 500 / CI	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/C	
	≤ Ø 32	3.0							
	≤ Ø 40	3.5							
	≤ Ø 50	4.0							
	≤ Ø 63	4.5		7.0				32	EI 90 U/C E 120 U/C
	≤ Ø 75	6.0							
	≤ Ø 90								
	≤ Ø 90								
	≤ Ø 110	10.0							

B.1.12 Directly through floor - Multilayer pipes (MLC)

B.1.12.5 Multiple Multilayer pipes (MLC) - PE foam LS-LI 300 / CS-CI


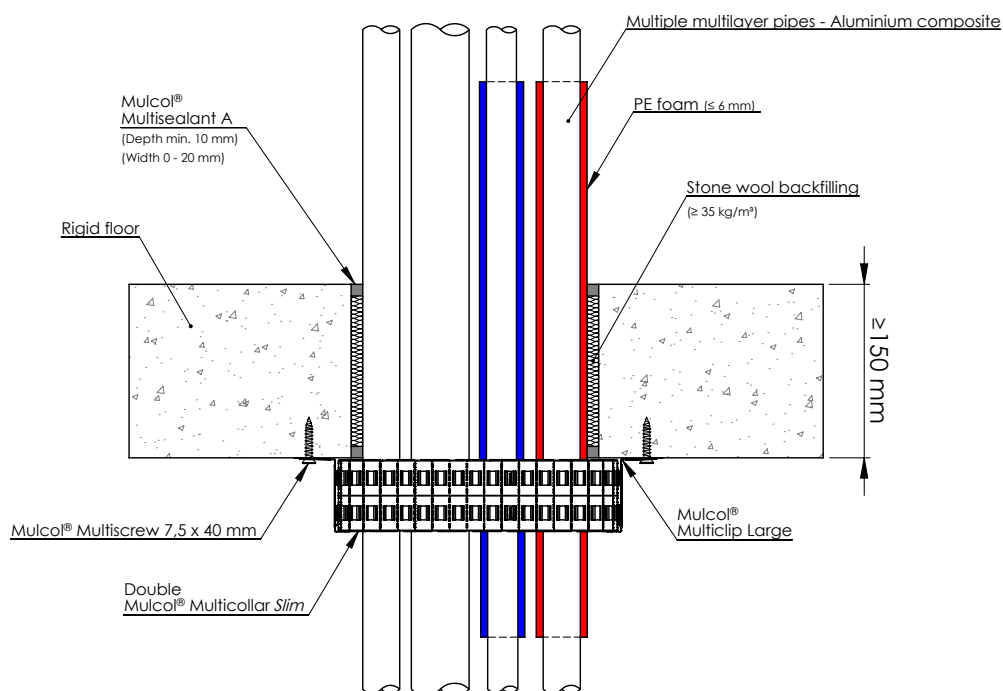
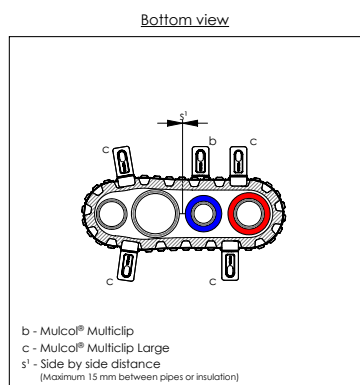


Drawing: RF.E-MC60-MLP4-21.0.40

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration			
Multilayer pipes (MLC)	≤ Ø 32	3.0	-	-	LS 300 / CS LI 300 / CI	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/C
	≤ Ø 50	4.0						EI 90 U/C E 120 U/C
	≤ Ø 26	3.0	PE foam	6				EI 120 U/C
	≤ Ø 32							

B.1.13 Multimastic FB1 - 2x50 mm - Metal pipes

B.1.13.1 Steel pipes - Elastomer LI 300 / CI

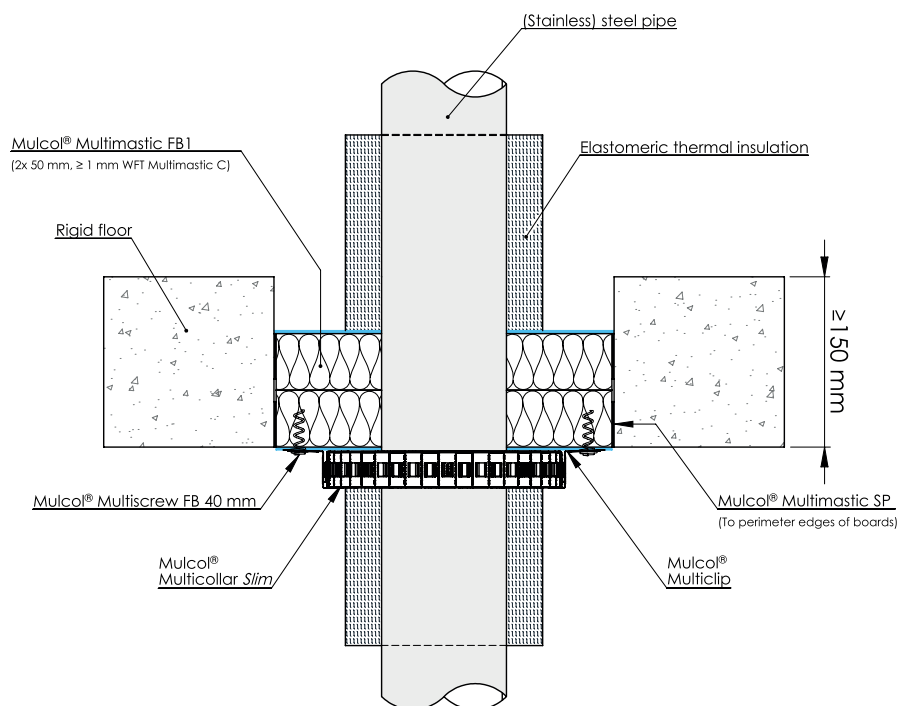

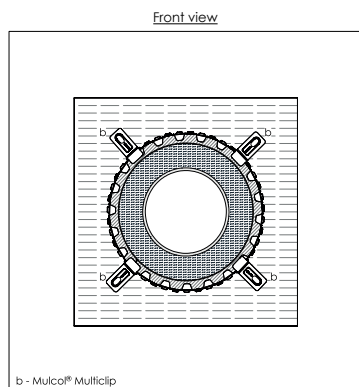


Drawing: PBrf.E-ST-11.0.22.LI

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Backing	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration				
(Stainless) Steel / cast iron	≤ Ø 114.3	≥ 3.6	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	9 - 32	LI 300 / CI	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	25 mm stone wool (≥ 33kg/m ³)	EI 60 C/U E 90 C/U
				32					EI 90 C/U

B.1.14 Multimastic FB1 - 2x50 mm cavity 50 mm - Metal pipes

B.1.14.1 Steel pipes - Elastomer LI 300 / CI

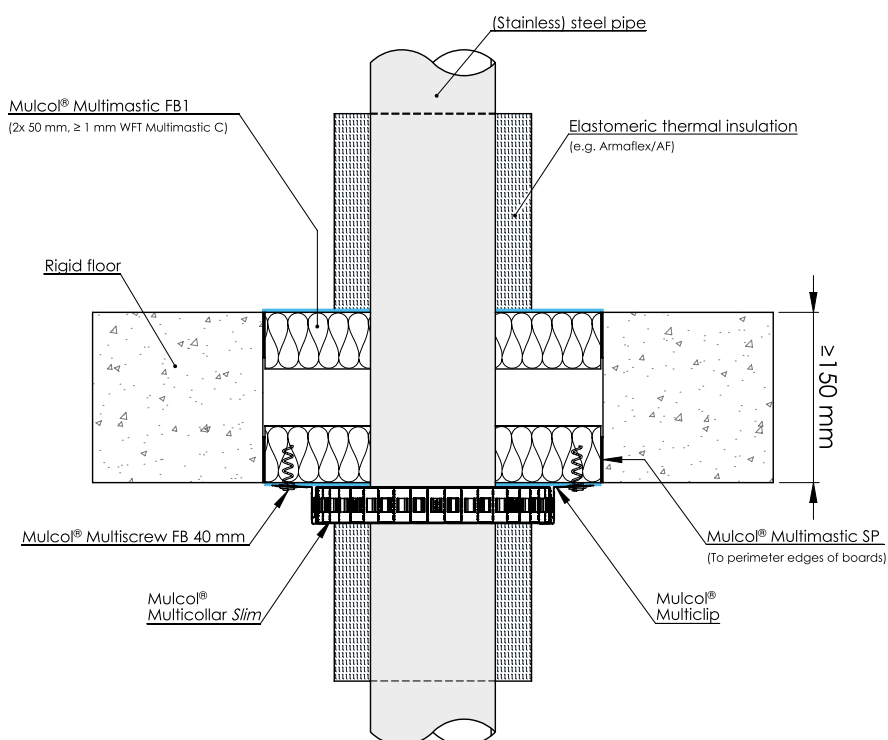
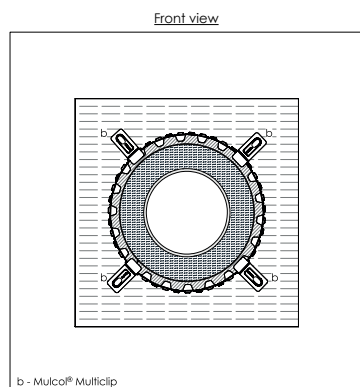


Drawing: PBrf.E-ST-11.0.22.LI.C

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Backing	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration				
(Stainless) Steel / cast iron	≤ Ø 114.3	≥ 3.6	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	9 - 32	LI 300 / CI	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	25 mm stone wool (≥ 33kg/m ³)	EI 60 C/U E 90 C/U
				32					EI 90 C/U

B.1.15 Multimortar - ≥ 100 mm - Metal pipes

B.1.15.1 Steel pipes - Elastomer LI 300 / CI

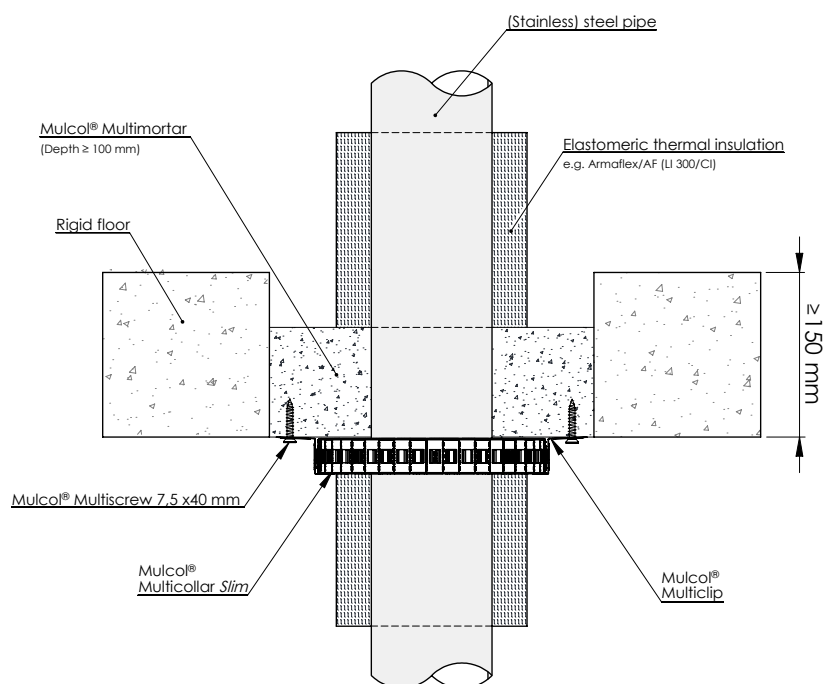
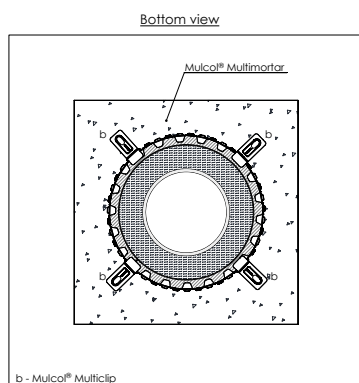


Drawing: RF.E-MC30-ST-MM1.2.22

Services	Dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
(Stainless) Steel / cast iron	$\leq \varnothing 114.3$	≥ 3.6	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	32	LI 300 / CI	Multicollar Slim	EI 90 C/U

B.1.16 Multimortar - ≥ 150 mm - Metal pipes

B.1.16.1 Steel pipes - Elastomer LI 300 / CI

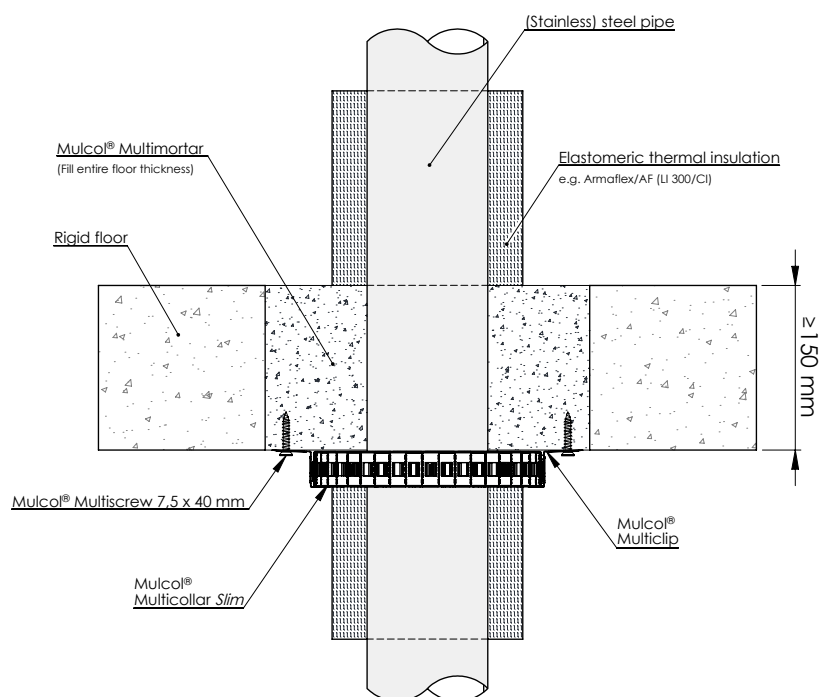
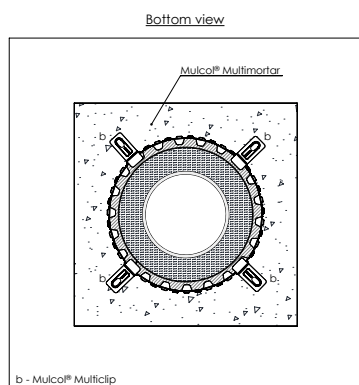


Drawing: RF.E-MC30-ST-MM1.3.22

Services	Dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
(Stainless) Steel / cast iron	$\leq \varnothing 114.3$	≥ 3.6	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	32	LI 300 / CI	Multicollar <i>Slim</i>	EI 90 C/U

B.1.17 Multimortar + Multimastic FB - ≥ 100 mm - Metal pipes

B.1.17.1 Steel pipes - Elastomer LI 300 / CI

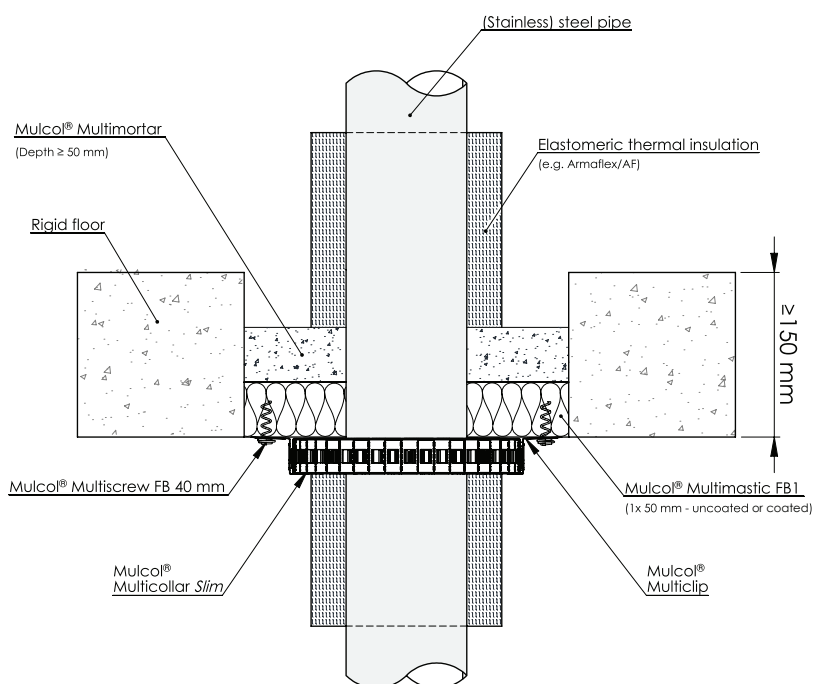
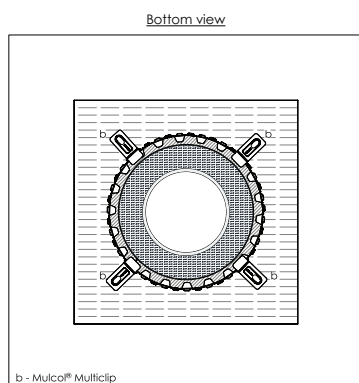


Drawing: RF.E-ST-MM2.5.22

Services	Dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
(Stainless) Steel / cast iron	$\leq \varnothing 114.3$	≥ 3.6	ArmaFlex (min. class B-s3, d0 B _L -s3, d0)	32	LI 300 / CI	Multicollar <i>Slim</i>	EI 90 C/U

B.1.18 Multimortar + Multimastic FB - ≥ 150 mm - Metal pipes

B.1.18.1 Steel pipes - Elastomer LI 300 / CI

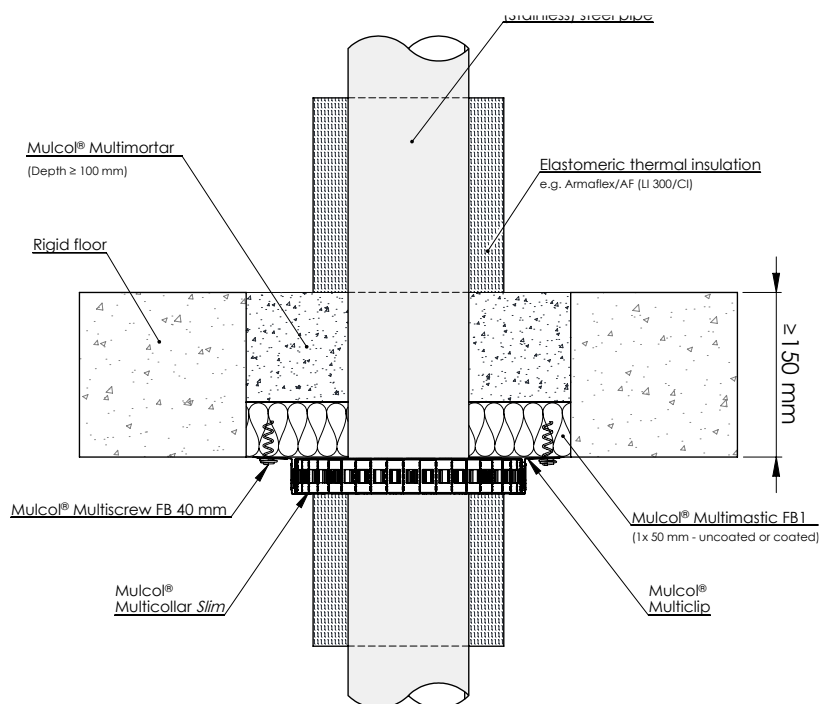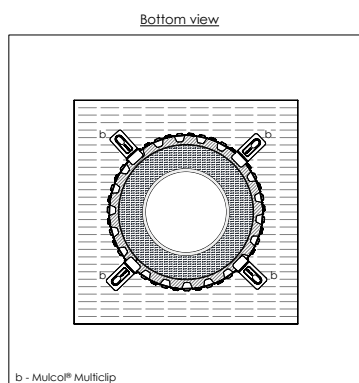



Drawing: RF.E-MC30-ST-MM2.7.22

Services	Dimensions (mm)		Insulation			Product	Classification
	Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
(Stainless) Steel / cast iron	$\leq \varnothing 114.3$	≥ 3.6	ArmaFlex (min. class B-s3, d0 B _L -s3, d0)	32	LI 300 / CI	Multicollar <i>Slim</i>	EI 90 C/U

B.1.19 Directly through floor - Metal pipes

B.1.19.1 Copper and steel pipes

Bottom view

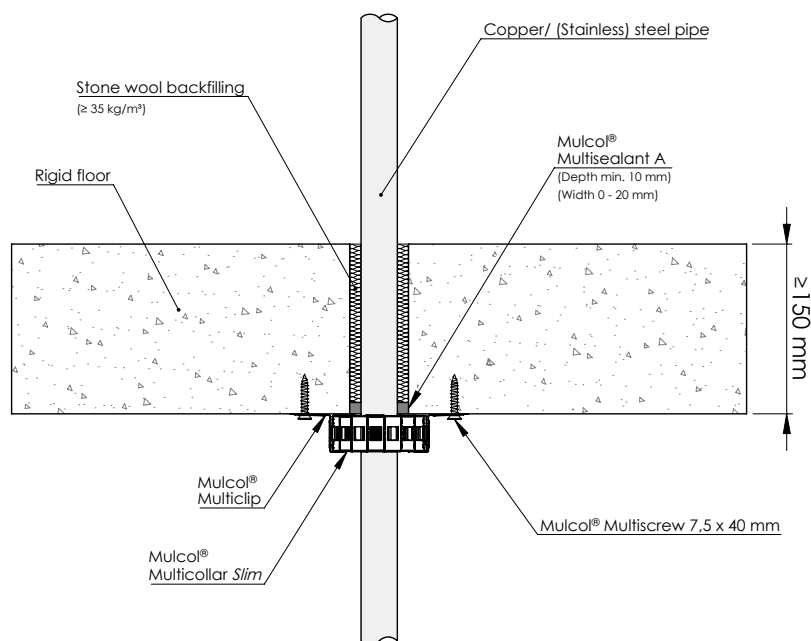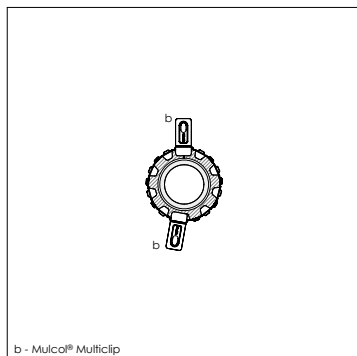



Drawing: RF.E-MC30-CU-11.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Backing	Classification
	Outer dimension	Wall thickness				
Copper / (stainless) steel / cast iron	≤ Ø 35	≥ 1.5	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 wxd)	Stone wool (≥ 35 kg/m³)	EI 20 U/C E 120 U/C

B.1.19 Directly through floor - Metal pipes

B.1.19.2 Steel pipes - Elastomer LI 500 / CI

Bottom view

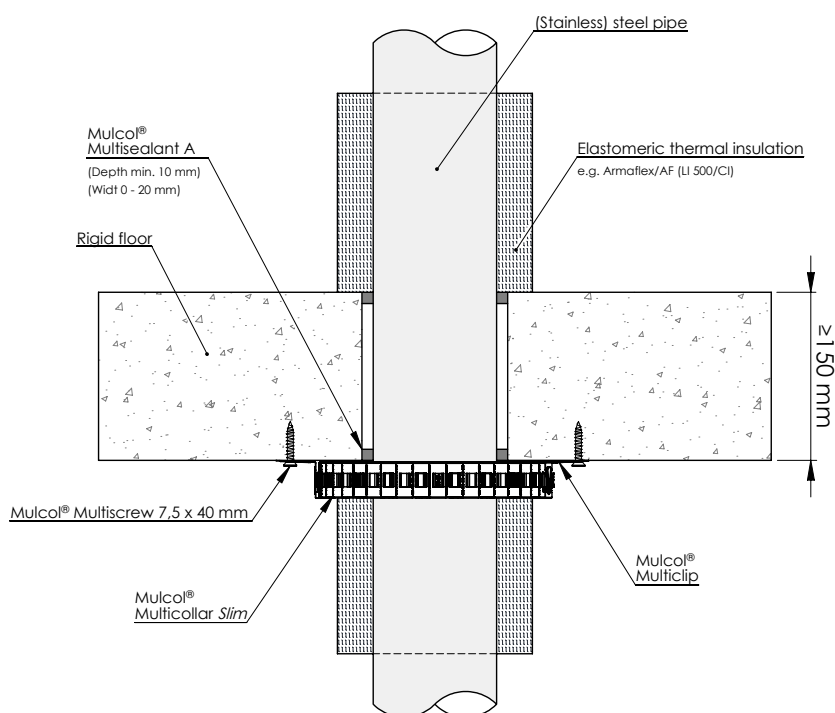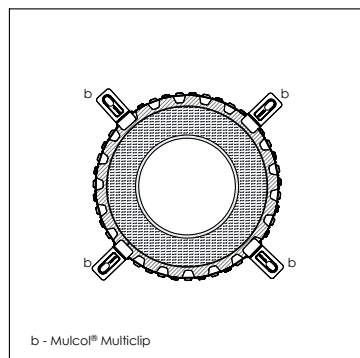



Drawing: RF.E-MC30-ST-11.0.22.LI

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration			
(stainless) Steel / cast iron	≤ Ø 114.3	≥ 3.6	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	9 - 32	LI 500 / CI	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 60 U/C
	≤ Ø 168.3	≥ 4.5						E 90 U/C
	≤ Ø 114.3	≥ 3.6		32				EI 90 U/C
	≤ Ø 168.3	≥ 4.5						

B.1.19 Directly through floor - Metal pipes

B.1.19.3 Copper and steel pipes - Elastomer LS 450 / CS

Bottom view

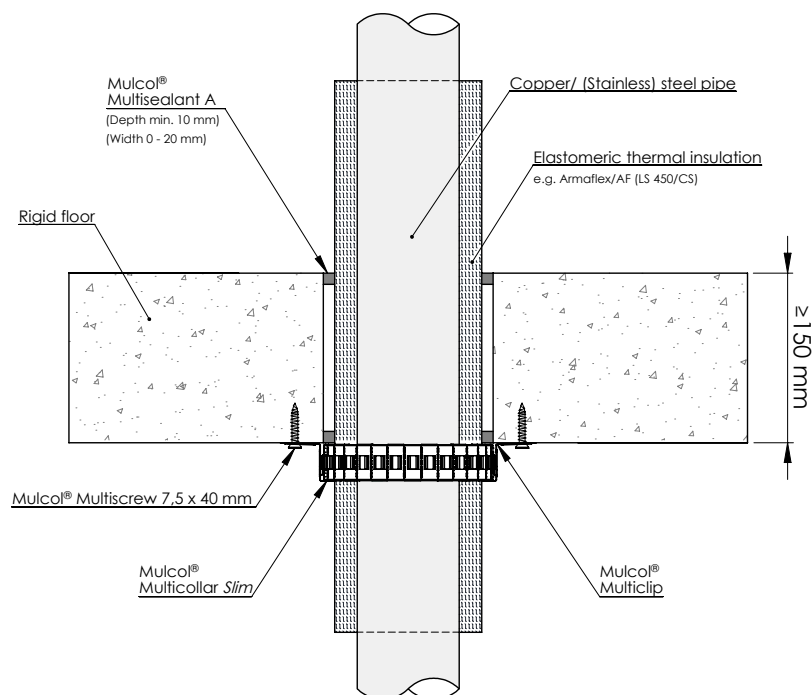
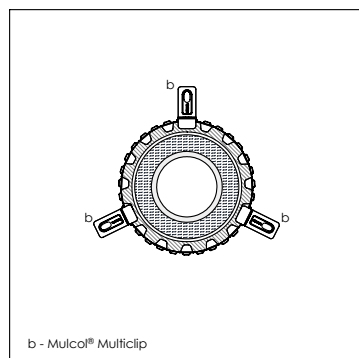


Drawing: RF.E-MC30-ST-11.0.22.LI

Services	Pipe dimensions (mm)		Insulation			Product	Sealing (mm)	Classification
	Outer dimensions	Wall thickness	Type	Thickness (mm)	Configuration			
Copper / (stainless) steel / cast iron	≤ Ø 88.9	≥ 2.0	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	32	LS 450 / CS	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 45 U/C E 90 U/C
	≤ Ø 114.3	≥ 3.6			CS			EI 60 U/C E 90 U/C
(Stainless) steel / cast iron	≤ Ø 168.3	≥ 4.5		9 - 32	LS 450 / CS			EI 60 U/C

B.1.20 Multimortar - ≥ 150 mm - Gas pipes

B.1.20.1 Corrugated stainless steel tube gas (CSST) pipes - Multitherm Bandage

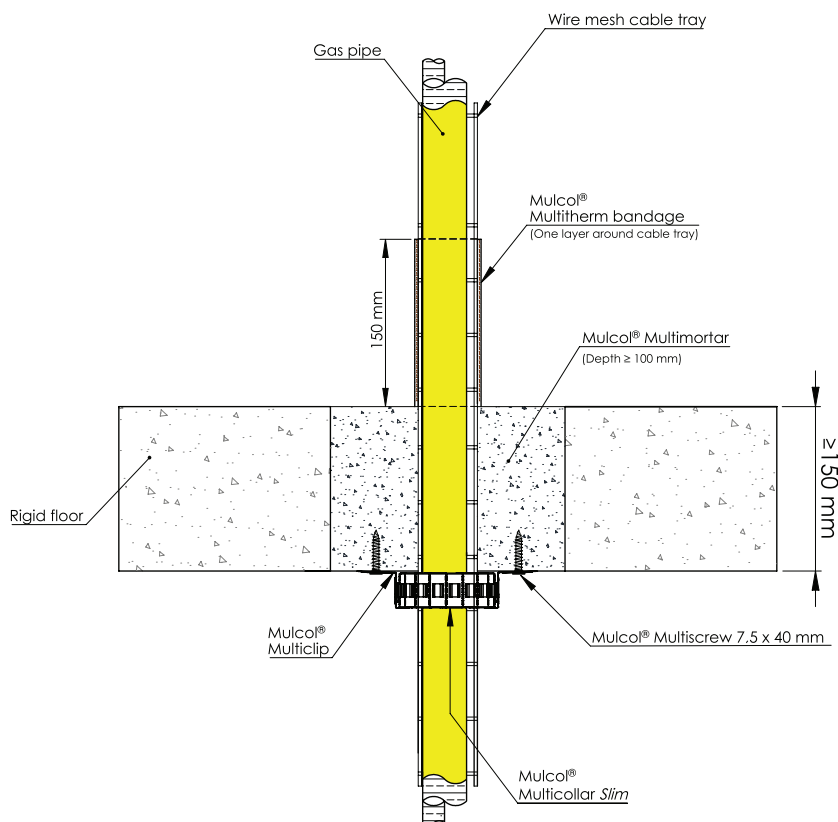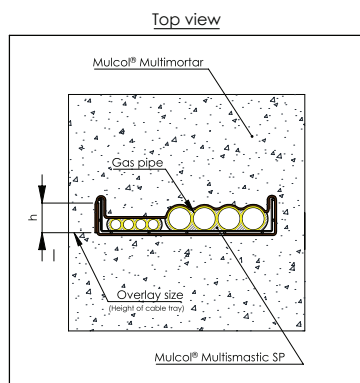


Drawing: RF-E-CT-GFS-MC30-MM1.3.10

Services	Number of pipes	Product	Sealing (mm)	Classification
CFS CSST gas pipe $\leq \varnothing 20$ mm in wire mesh cable tray	≤ 4	Multicollar <i>Slim</i> bottom of floor	LI 150 one layer top of floor	EI 120 U/C
CFS CSST gas pipe $\leq \varnothing 41$ mm in wire mesh cable tray	≤ 4			

B.1.20 Multimortar - ≥ 150 mm - Gas pipes

B.1.20.2 Corrugated stainless steel tube gas (CSST) pipes - Multitherm Bandage


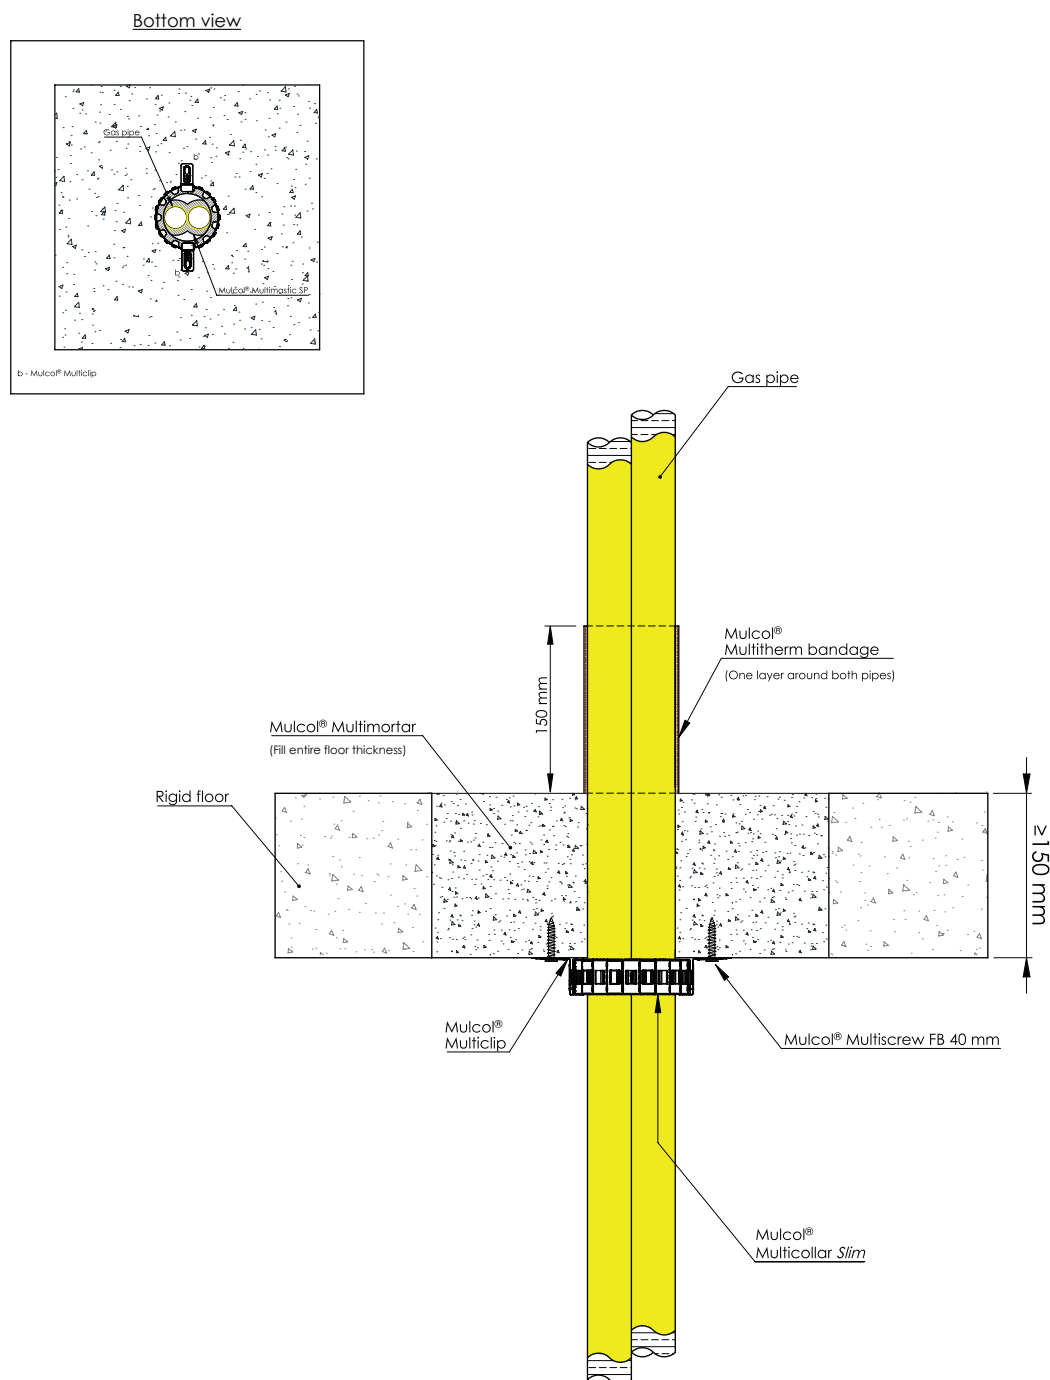


Drawing: RF.E-GFS2-MC30-MM1.3.10

Services	Number of pipes	Product	Sealing (mm)	Classification
CFS CSST gas pipe $\leq \varnothing 41$ mm	≤ 2	Multicollar <i>Slim</i> bottom of floor	LI 150 one layer top of floor	EI 120 U/C

B.1.21 Multimortar + Multimastic FB - 150 mm - Gas pipes

B.1.21.1 Corrugated stainless steel tube gas (CSST) pipes - Multitherm Bandage

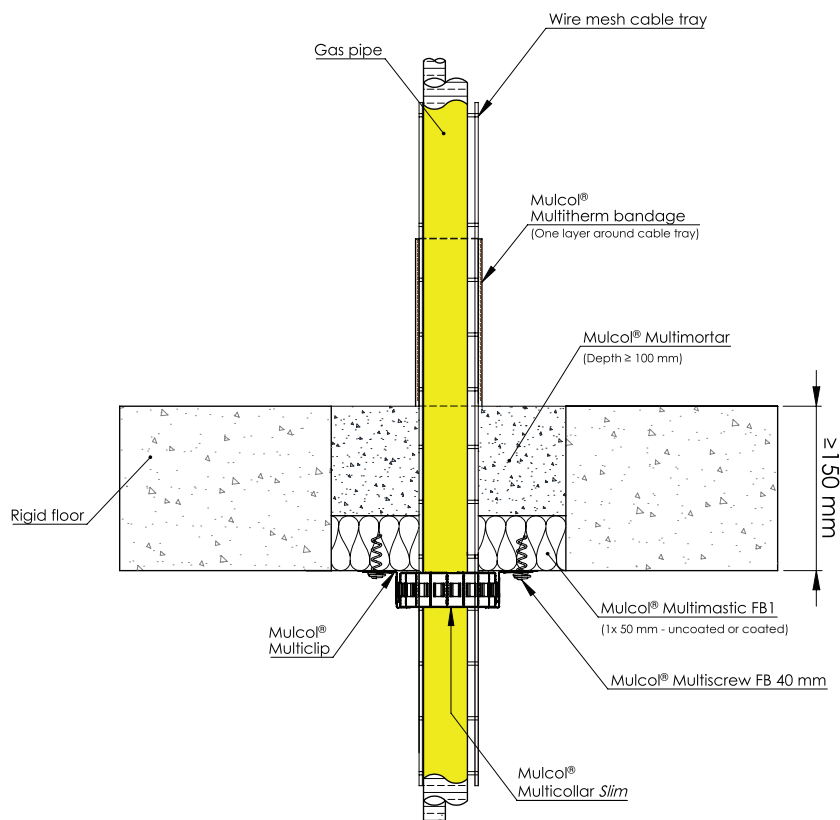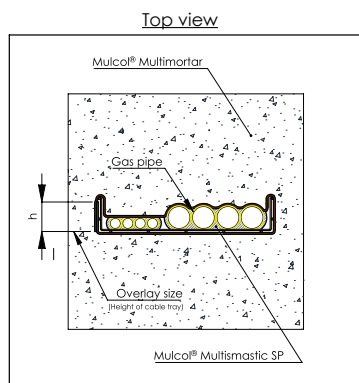


Drawing: RF.E-CT-GFS-MM2.2.10

Services	Number of pipes	Product	Sealing (mm)	Classification
CFS CSST gas pipe $\leq \varnothing 20$ mm in wire mesh cable tray	≤ 4	Multicollar <i>Slim</i> bottom of floor	LI 150 one layer top of floor	EI 120 U/C
CFS CSST gas pipe $\leq \varnothing 41$ mm in wire mesh cable tray	≤ 4			

B.1.21 Multimortar + Multimastic FB - 150 mm - Gas pipes


B.1.21.2 Corrugated stainless steel tube gas (CSST) pipes - Multitherm Bandage

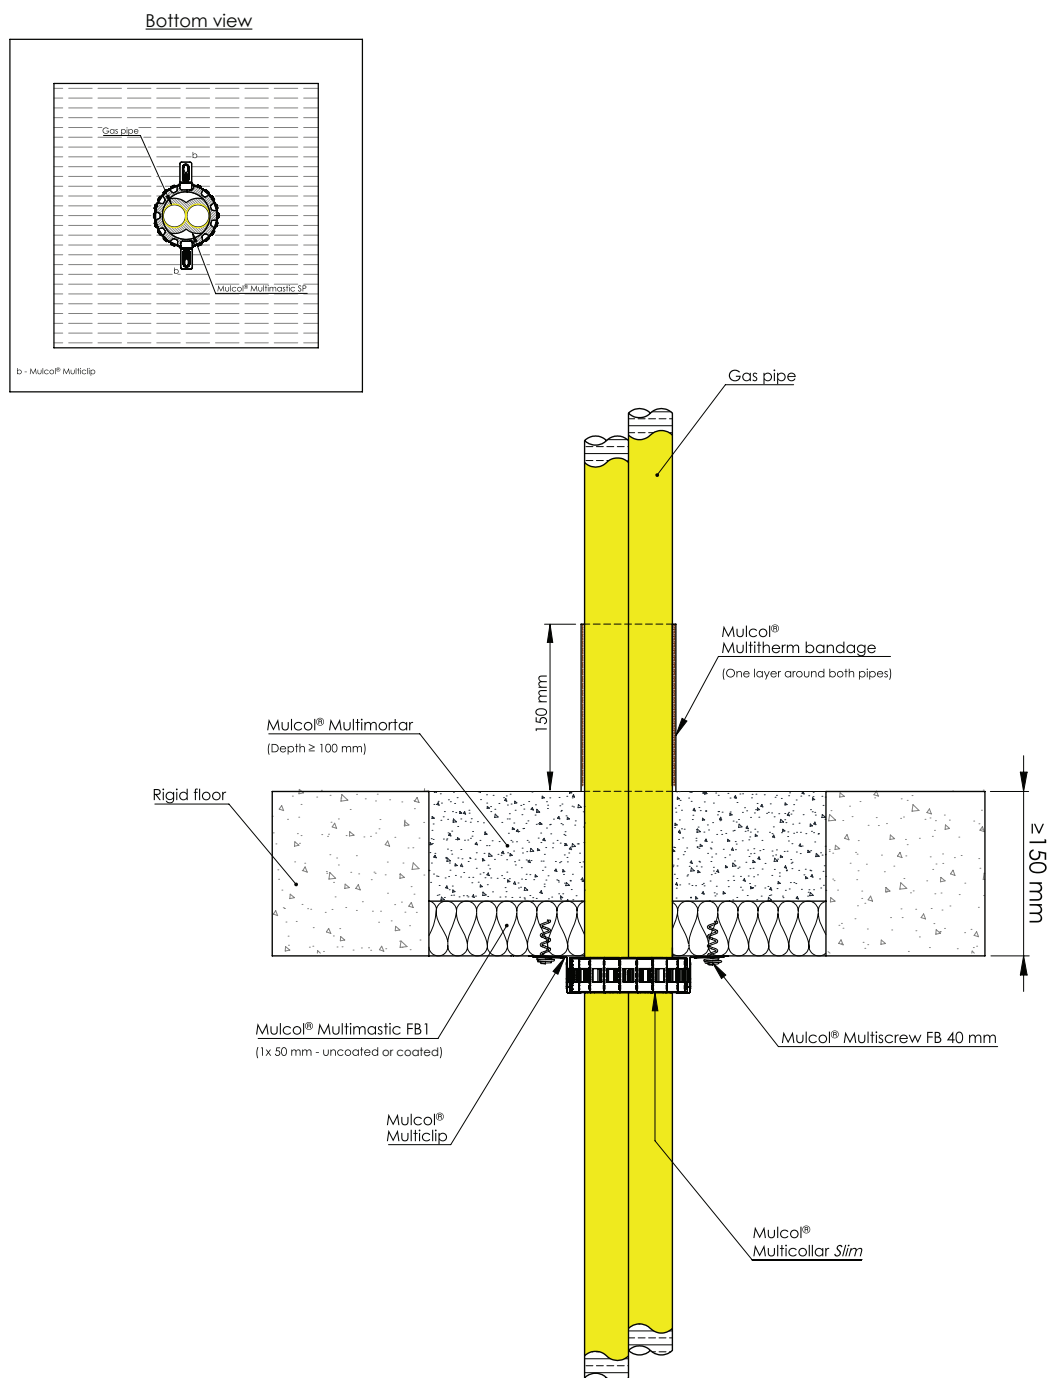

Drawing: RF.E-GFS2-MM2.2.1

Services	Number of pipes	Product	Sealing (mm)	Classification
CFS CSST gas pipe $\leq \varnothing 41$ mm	≤ 2	Multicollar <i>Slim</i> bottom of floor	LI 150 one layer top of floor	EI 120 U/C

B.1.22.1 Multiple pipes and cables


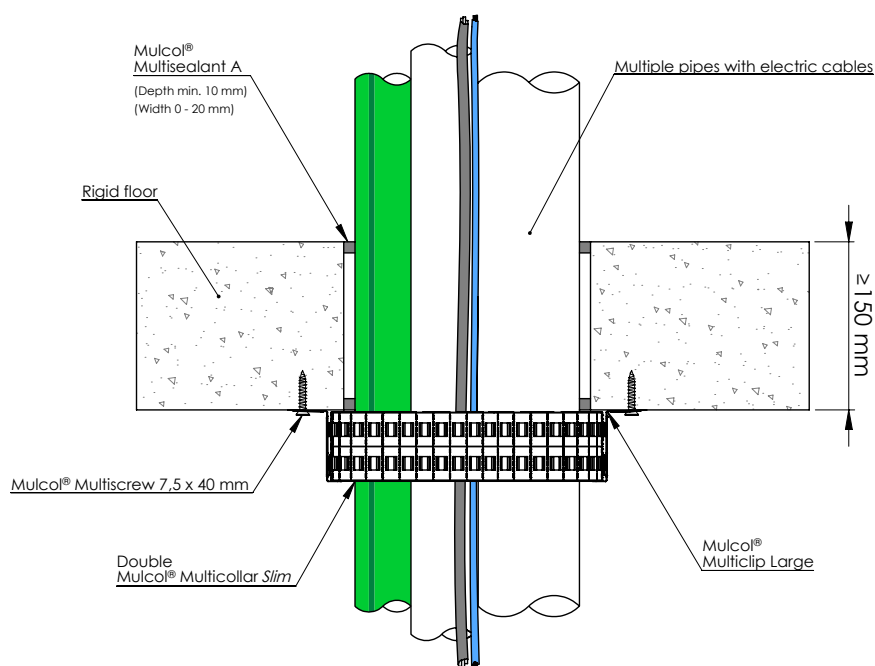


Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE(-HD) / PE-X / ABS / SAN+PVC	≤ Ø 90	2.8	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wx/d)	EI 120 U/U
Multilayer pipes (MLC)	≤ Ø 50	4.0			EI 120 U/C
Aquatherm Green-MF		6.9			
Telecommunication cable	UTP Cat 5/6	-			EI 120
Sheathed cable	≤ 5 x 2.5 mm ²	-			

B.1.22 Directly through floor - Multiple services

B.1.22.2 Airconditioning set

Bottom view

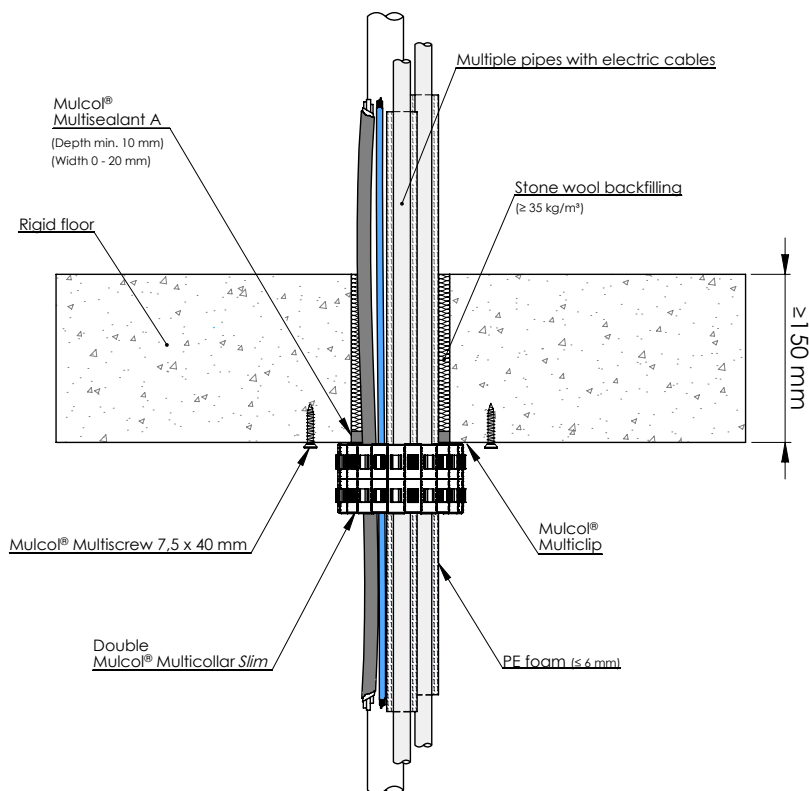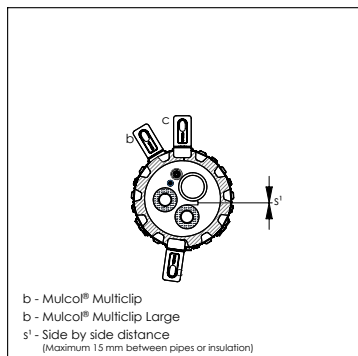



Drawing: RF.E-MC60-MLP5-21.0.40

Services	Pipe dimensions (mm)		Insulation			Product	Classification
	Outer diameter	Wall thickness	Type	Thickness (mm)	Configuration		
Set of airconditioning pipes	$2x \leq \varnothing 15$	1.5	PE foam	≥ 6	LS 400 / CS LI 400 / CI	Multicollar Slim	EI 120 C/U
PVC-U / PVC-C	$\leq \varnothing 32$	3.0	-	-	-		EI 120 U/U
Telecommunication cable	UTP Cat 5/6	-	-	-	-		EI 120
Sheathed cable	$\leq \text{YMKV } 5 \times 2.5 \text{ mm}^2$	-	-	-	-		

B.1.23 Directly through floor - Flue gas pipes

B.1.23.1 Aluminium flue gas pipes

Bottom view

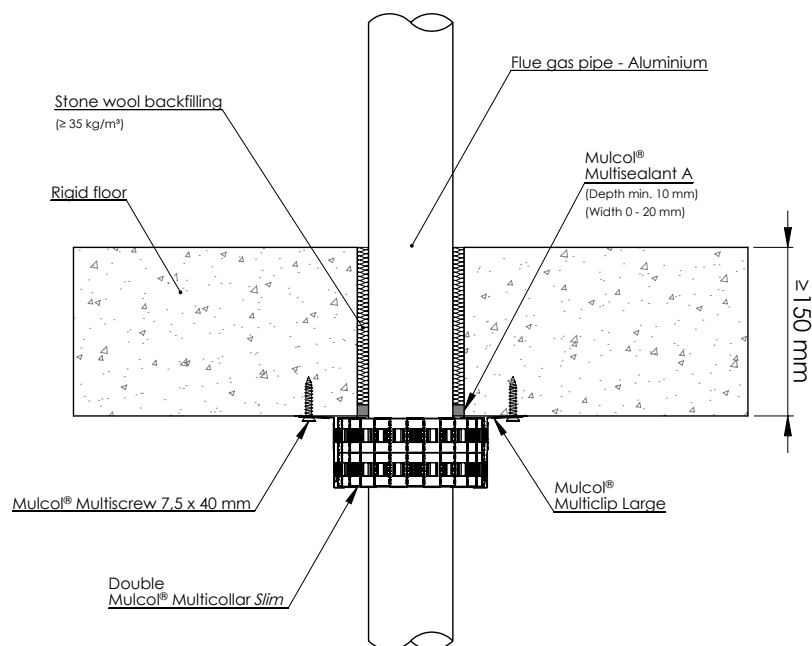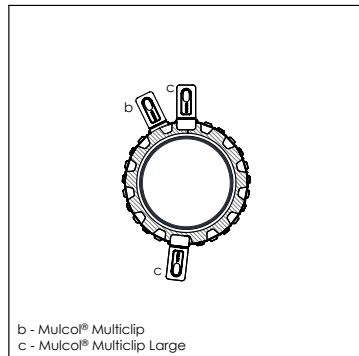



Drawing: RF.E-MC60-RGA-21.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Aluminium	≤ Ø 80	1.5	Multicollar <i>Slim</i> double	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 15 U/C, E 90 U/C
	≤ Ø 130				E 90 U/C

B.1.23 Directly through floor - Flue gas pipes

B.1.23.2 Concentric steel/PP flue gas pipes

Bottom view

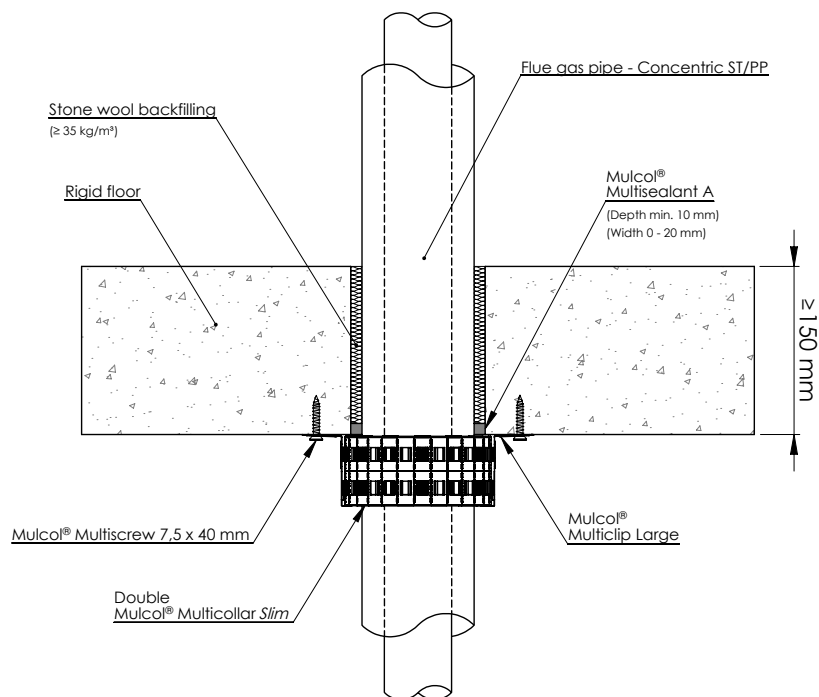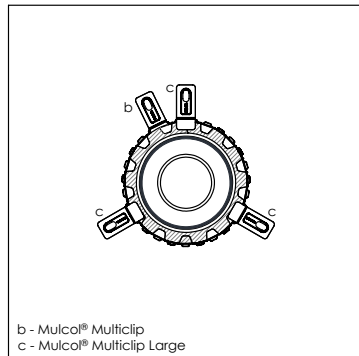



Drawing: RF.E-MC60-RGAT-21.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer pipe dimension	Inner pipe dimension			
Steel/PP flue gas system concentric	≤ Ø 110	≤ Ø 60	Multicollar Slim double	Multimastic SP 0-20 x ≥ 10 (wxd)	E 90 U/C
	≤ Ø 125	≤ Ø 80			
	≤ Ø 150	≤ Ø 100			
	≤ Ø 200	≤ Ø 130			

B.1.23 Directly through floor - Flue gas pipes

B.1.23.3 Plastic flue gas pipes

Bottom view

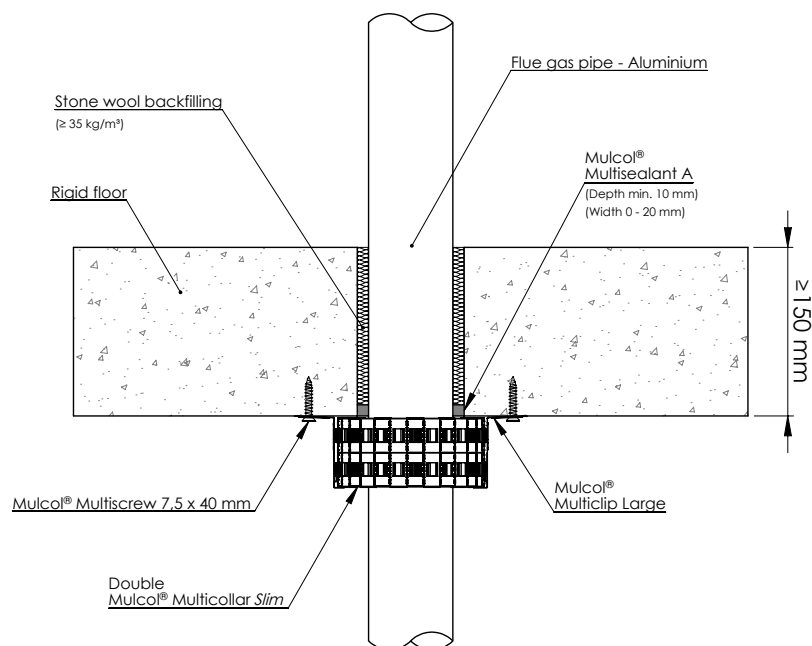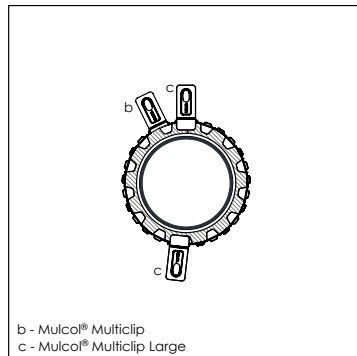



Drawing: RF.E-MC60-RGA-21.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PP	$\leq \varnothing 40$	1.8 - 4.0	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/U
	$\leq \varnothing 125$	3.1 - 4.0			

B.1.23 Directly through floor - Flue gas pipes

B.1.23.4 Concentric plastic flue gas pipes

Bottom view

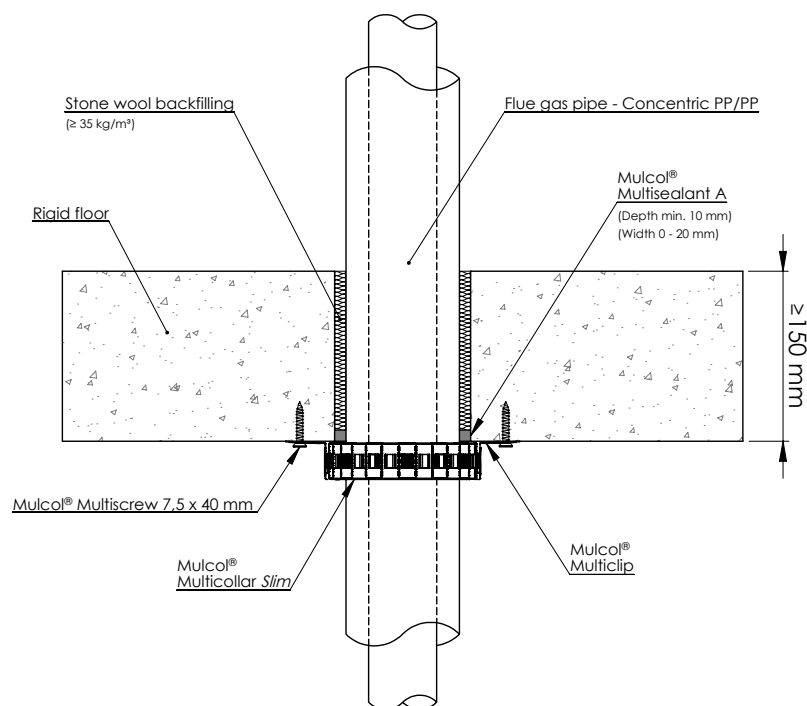
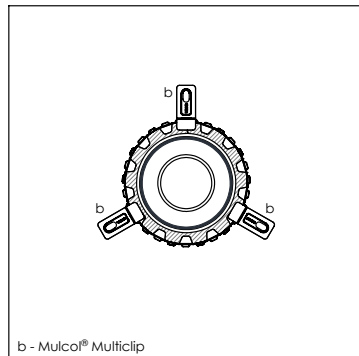


Drawing: RF.E-MC30-RGAT_PP-11.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PP / PP	≤ Ø 40	1.8 - 4.0	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/U
	≤ Ø 125	3.1 - 4.0			

B.2.1 Directly through floor - Cables, trays and conduits

B.2.1.1 Multiple plastic conduits

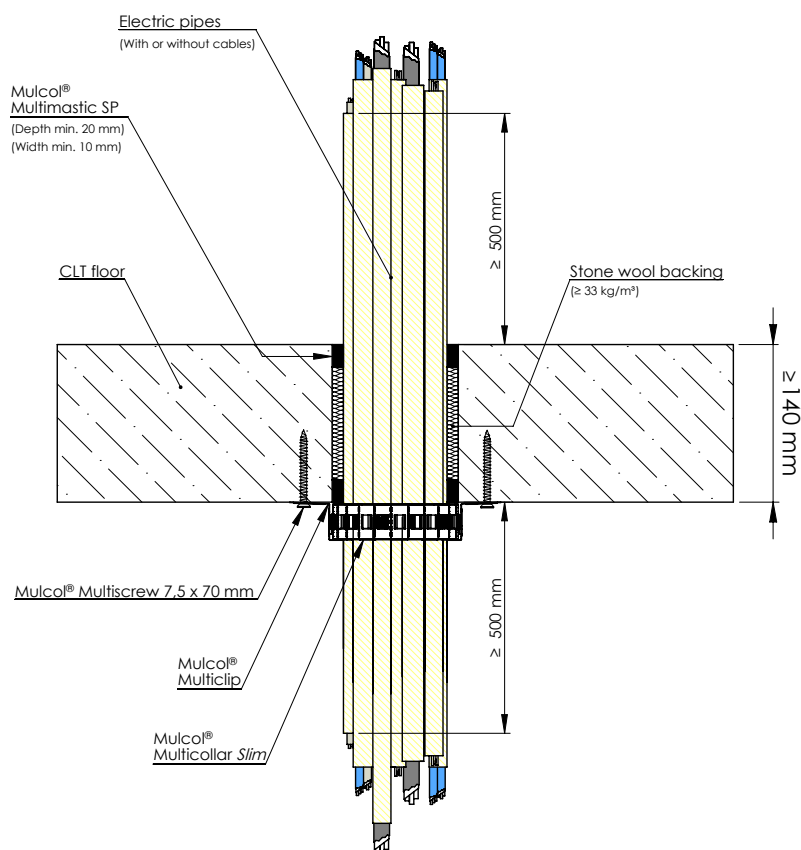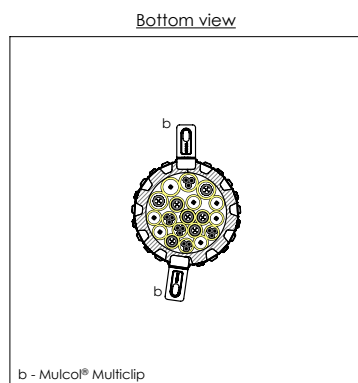



Drawing: FCLT.E-MC30-EPB-11.0.40

Services	Length of conduit	Product	Allowed cables	Classification
Multiple PVC conduits max. $\leq \varnothing 80 \text{ mm}$ max. $\leq \varnothing 19 \text{ mm}$ each with or without cables	$\geq 500 \text{ mm}$	Multicollar Slim	Sheathed cables $\leq \varnothing 10.2 \text{ mm}$ Unsheathed cables $\leq \varnothing 5 \text{ mm}$	EI 90 U/U, E 120 U/U

B.2.1 Directly through floor - Cables, trays and conduits

B.2.1.2 Flexible conduits with cables

Bottom view

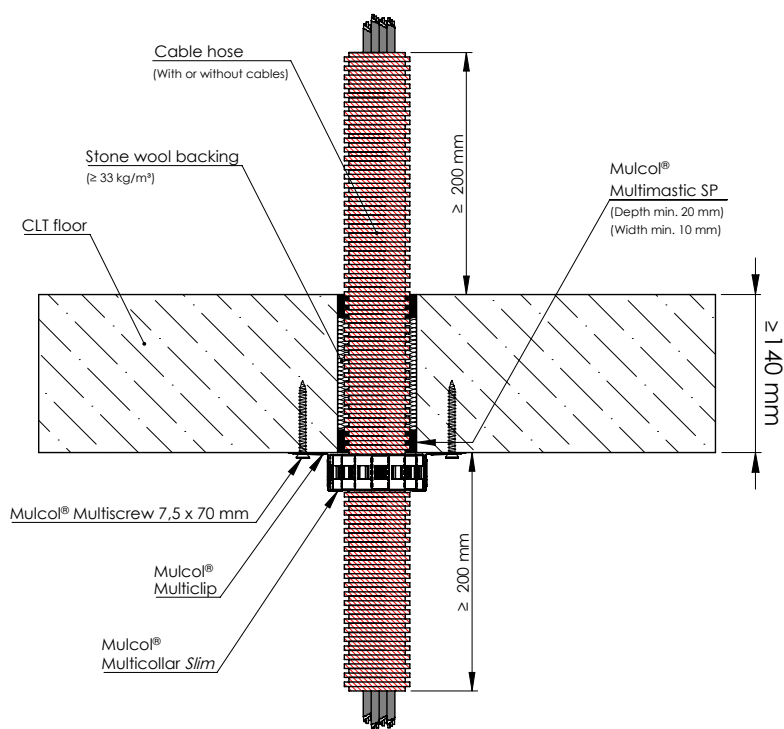
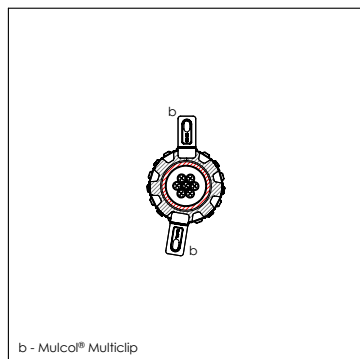


Drawing: FCLT.E-MC30-ECH-11.0.30

Services	Length of conduit	Product	Allowed cables	Classification
Ribbed PE-sleeve conduit ≤ Ø 63 mm, with or without cables	≥ 200 mm	Multicollar Slim	Sheathed cables ≤ Ø 60 mm (single or bundled) Telecommunication cables ≤ Ø 21 mm in a tied bundle ≤ Ø 60 mm	EI 90 U/U, E 120 U/U

B.2.2 Multimastic FB1 - 2x50 mm - Combustible pipes

B.2.2.1 Plastic pipes

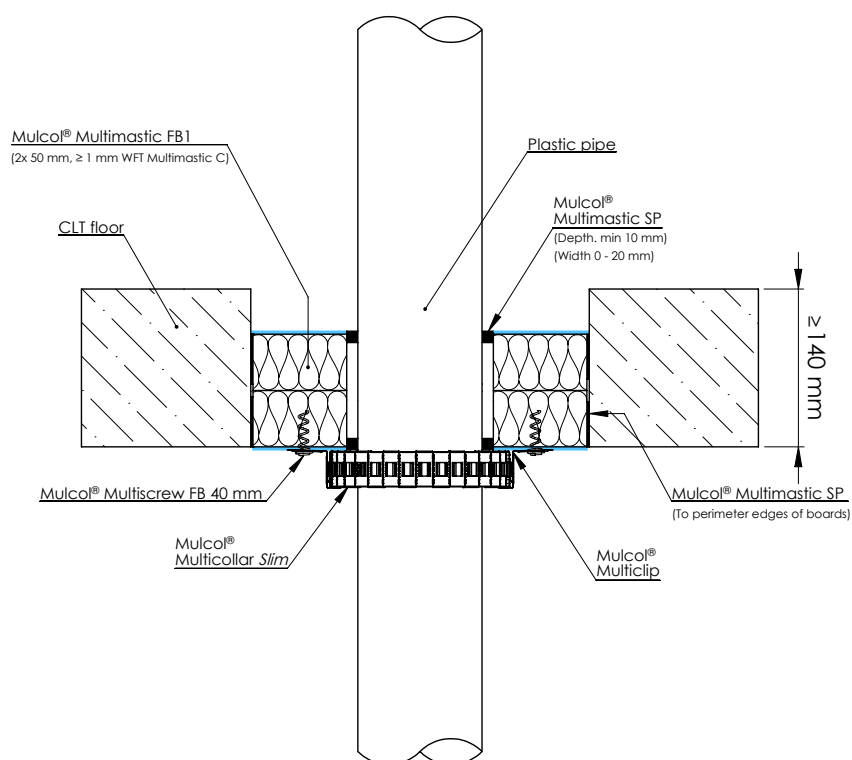
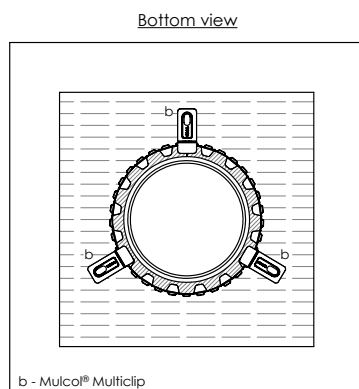


Drawing: FCLT.E-MC30-PP-MFB1.2.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE-HD/ PE / ABS / SAN+PVC	≤ Ø 110	2.7	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 45 U/U
		2.7 - 6.6			
PP		2.7			
		2.7 - 6.3			
PVC-U / PVC-C		2.7			
		2.7 - 6.3			

B.2.2 Multimastic FB1 - 2x50 mm - Combustible pipes

B.2.2.2 Plastic pipes (Silent)

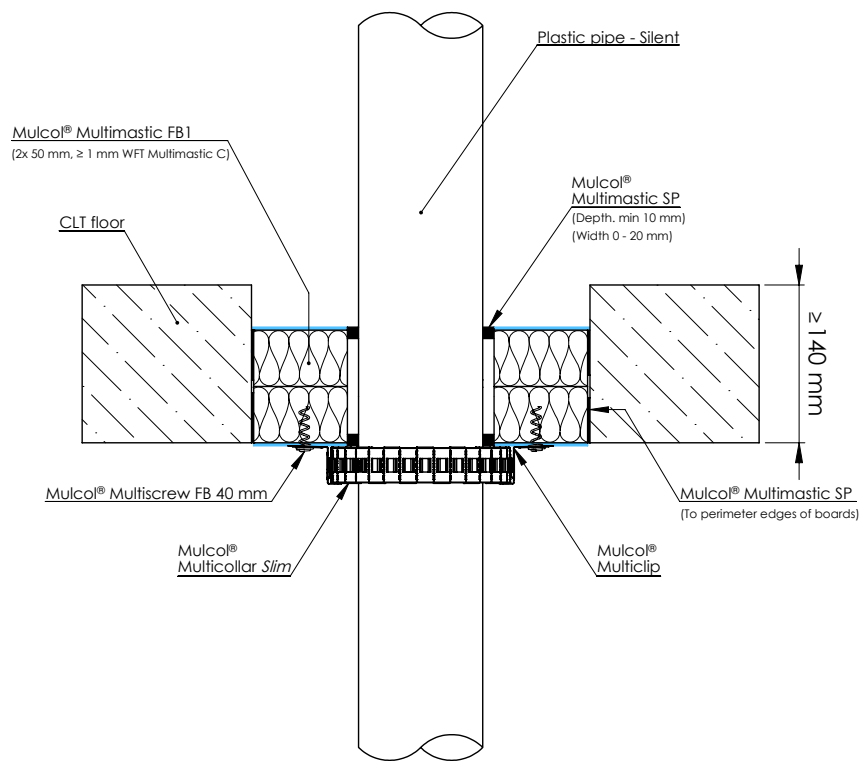
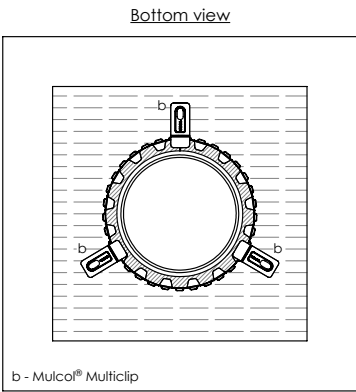


Drawing: FCLT.E-MC30-PPS-MFB1.2.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB 20	≤ Ø 110	6.0	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 45 U/U

B.2.2 Multimastic FB1 - 2x50 mm - Combustible pipes

B.2.2.3 PP-R Multilayer pipes

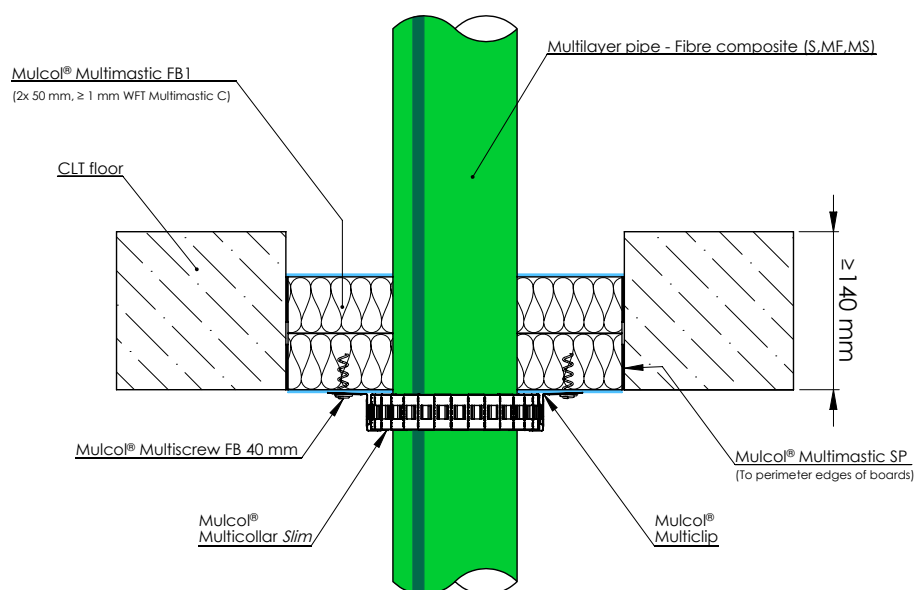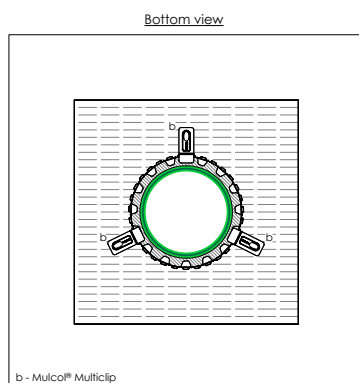



Drawing: FCLT.E-MC30-MLF-MFB1.2.10

Services	Pipe dimensions (mm)		Product	Classification
	Outer dimension	Wall thickness		
Aquatherm Green-MF	≤ Ø 50	6.9	Multicollar Slim	EI 45 U/C
Aquatherm Blue-MF	≤ Ø 110	10.0		

B.2.3 Directly through the floor - Combustible pipes

B.2.3.1 Plastic pipes

Bottom view

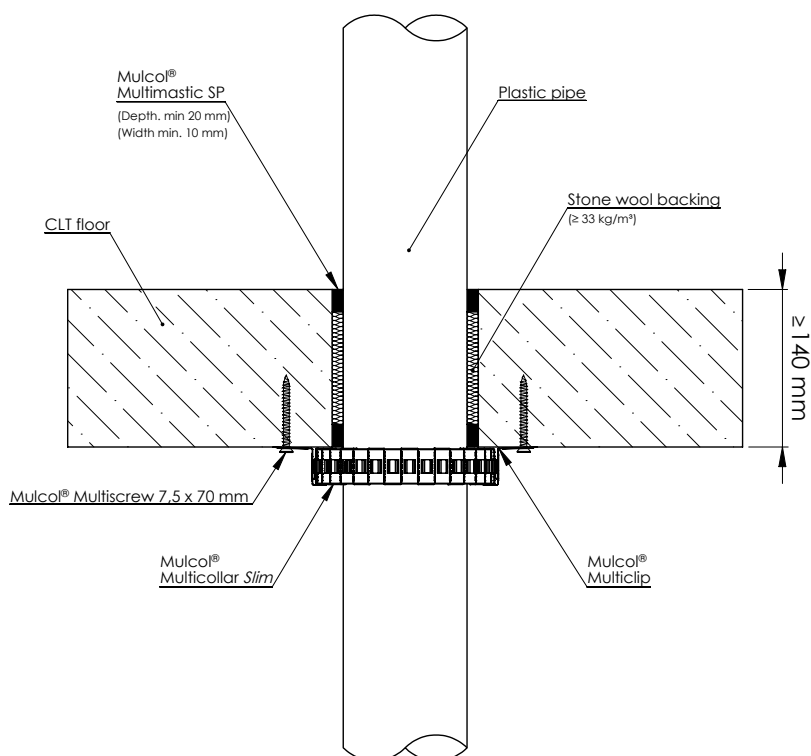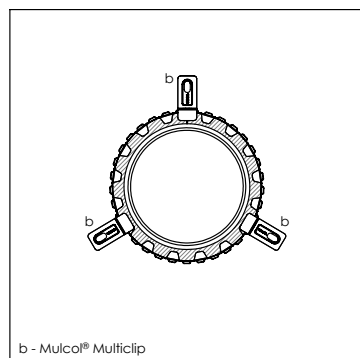



Drawing: FCLT.E-MC30-PP-11.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
PE-HD/ PE / ABS / SAN+PVC	≤ Ø 40	2.3 - 10.0	Multicollar Slim	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 90 U/U
	≤ Ø 110	2.7 - 10.0			EI 120 U/C
	≤ Ø 125	3.9			EI 120 U/U
PP	≤ Ø 40	2.3			EI 90 U/U
		2.3 - 10.0			EI 120 U/C
	≤ Ø 110	2.7 - 10.0			EI 90 U/U
PVC-U / PVC-C	≤ Ø 125	3.1			EI 120 U/C
	≤ Ø 40	2.3 - 10.0			EI 90 U/U
	≤ Ø 110	2.7 - 10.0			EI 120 U/U
		3.2 - 8.1			EI 120 U/U

B.2.3 Directly through the floor - Combustible pipes

B.2.3.2 Plastic pipes (Silent)


Bottom view

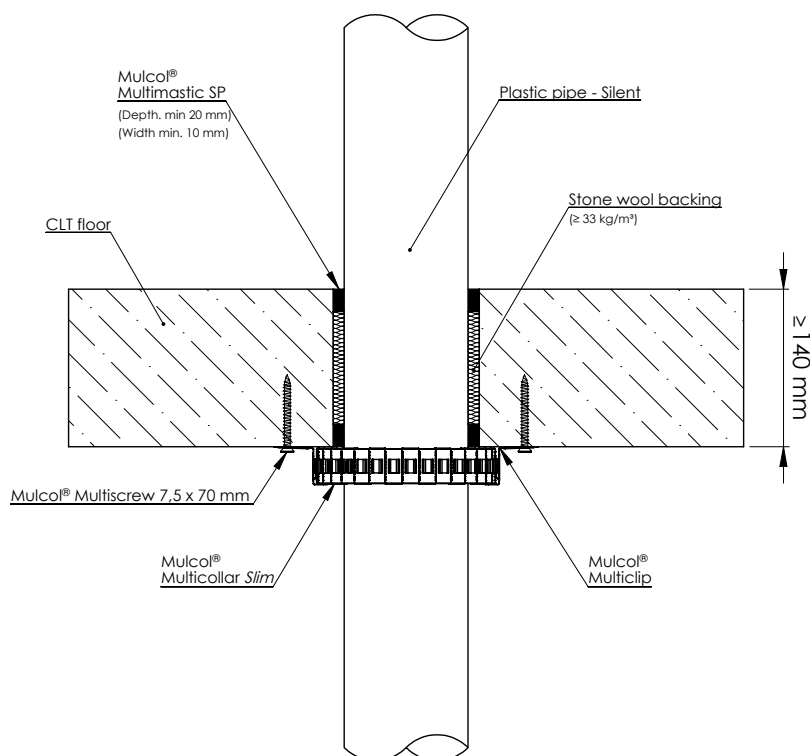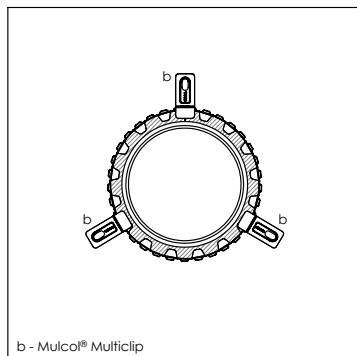

Drawing: FCLT.E-MC30-PPS-11.0.10

Services	Pipe dimensions (mm)		Product	Sealing (mm)	Classification
	Outer dimension	Wall thickness			
Geberit Silent dB 20	≤ Ø 110	6.0	Multicollar <i>Slim</i>	Multimastic SP 0-20 x ≥ 10 (wxd)	EI 120 U/U
Raupiano Plus		2.7			EI 60 U/C
	≤ Ø 160	4.0			



B.2.4.1 Multilayer pipes (MLC) - Elastomer CS

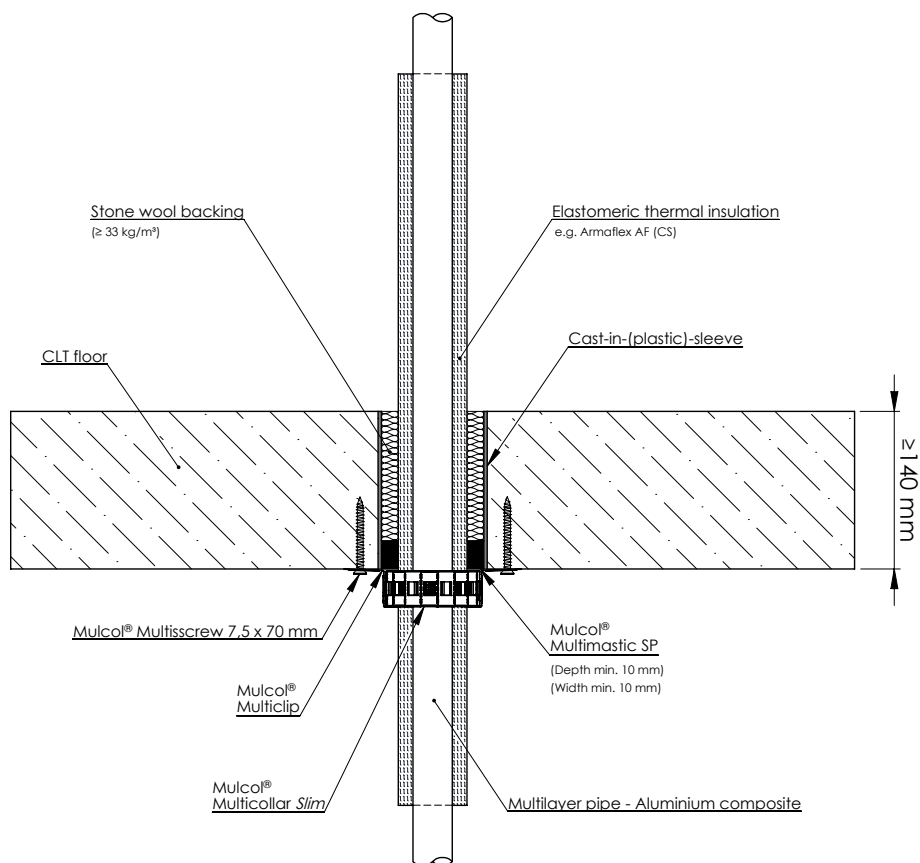

Services		Pipe dimensions (mm)		Insulation			Product	Classification
		Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
Multilayer pipes (MLC)	with or without plastic cast-in sleeve ≤ Ø 75	≤ Ø 32	≥ 3.0	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	13	CS	Multicollar <i>Slim</i>	EI 120 C/U

B.2.4 Directly through the floor - Cast-in sleeve

B.2.4.2 Copper and steel pipes - Elastomer CS

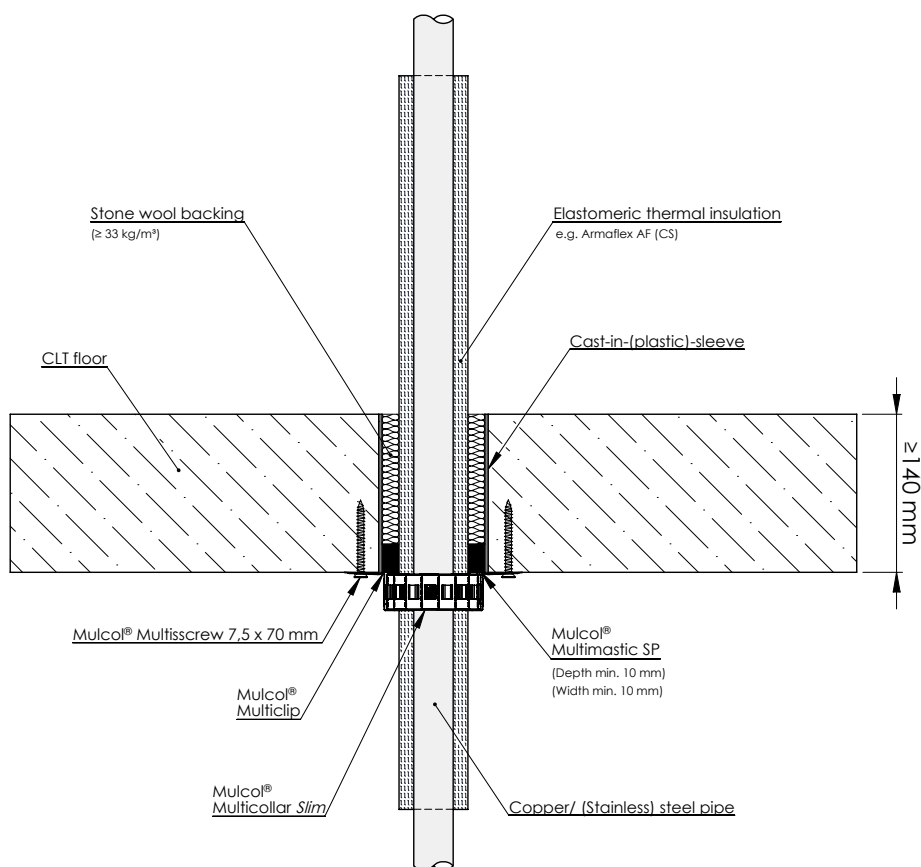
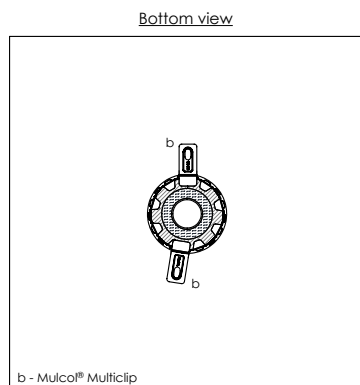


Drawing: FCLTmk.E-MC30-CU-MSP1.1.22

Services		Pipe dimensions (mm)		Insulation			Product	Classification
		Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
Copper / (stainless) steel / cast iron	with or without plastic cast-in sleeve ≤ Ø 75	≤ Ø 35	≥ 1.5	ArmaFlex AF (min. class B-s3, d0 B _L -s3, d0)	13	CS	Multicollar Slim	EI 60 C/U E 120 C/U

B.2.4 Directly through the floor - Cast-in sleeve

B.2.4.3 Steel pipes - PUR-PE CS

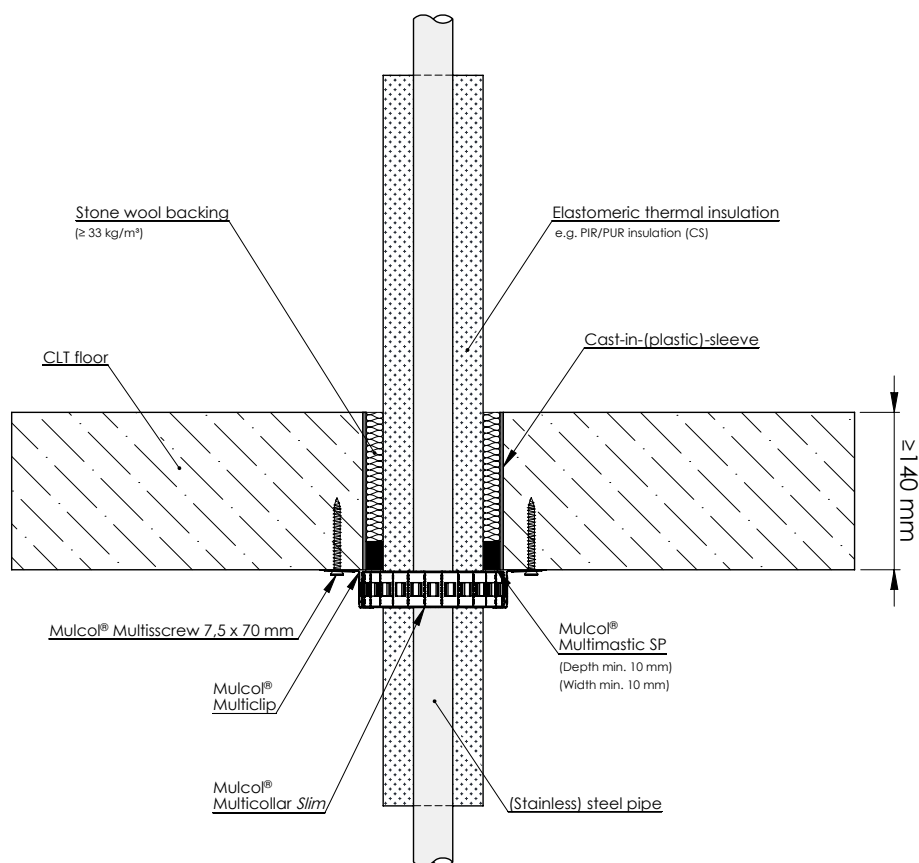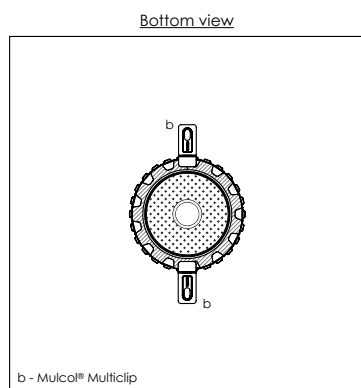


Drawing: FCLTmk.E-MC30-ST-MSP1.1.22

Services		Pipe dimensions (mm)		Insulation			Product	Classification
		Outer dimension	Wall thickness	Type	Thickness (mm)	Configuration		
(Stainless) steel / cast iron	with or without plastic cast-in sleeve ≤ Ø 125	≤ Ø 32	≥ 2.0	PUR-PE	30	CS	Multicollar Slim	EI 120 C/U

C.1 Wall constructions - General

C.1.1 Mutual distances & distance to first support

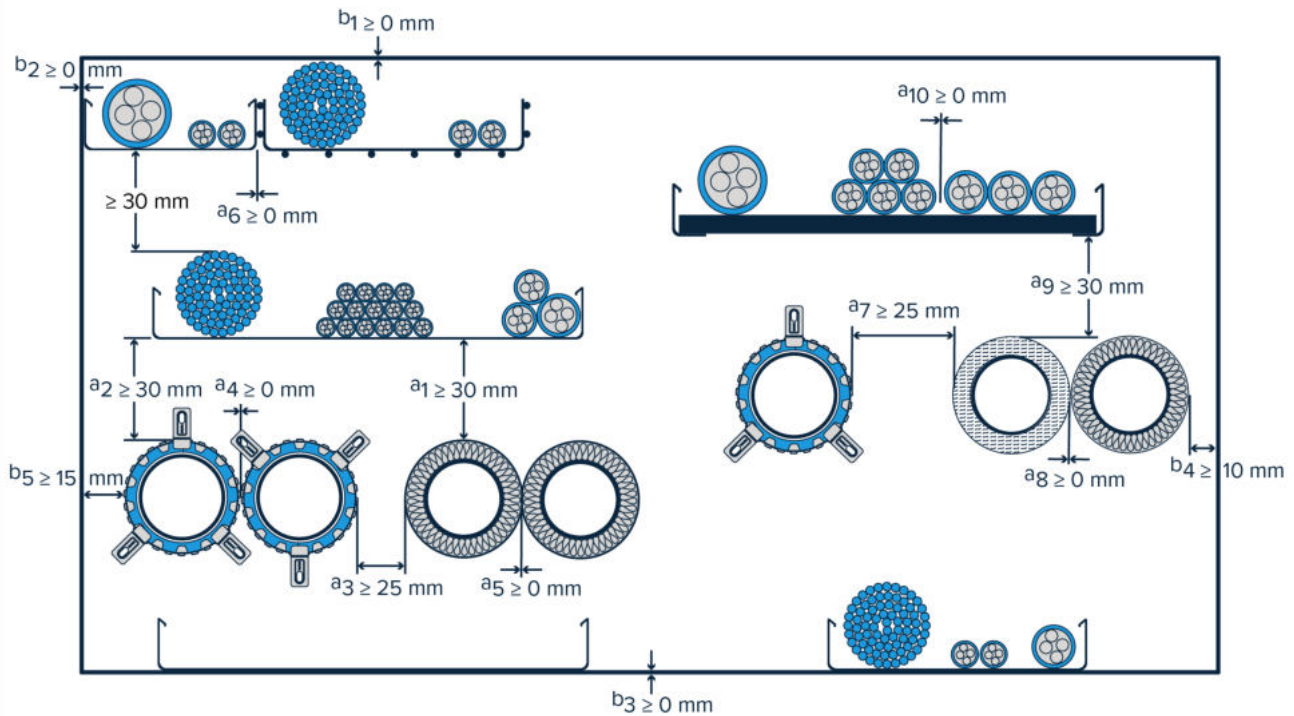

Mutual distances Mixed Penetration Seal


- a_1 Distance between cables/cable trays and metal pipes
- a_2 Distance between cables/cable trays and plastic pipes
- a_3 Distance between metal pipes and plastic pipes
- a_4 Distance between plastic pipes
- a_5 Distance between metal pipes with non-combustible insulation
- a_6 Distance between cable trays
- a_7 Distance between plastic pipes and pipes with combustible insulation
- a_8 Distance between pipes with non-combustible insulation and pipes with combustible insulation
- a_9 Distance between cables/cable trays and pipes with combustible insulation
- a_{10} Distance between cables stacked together or in a row
- b_1 Distance between cables/cable trays and the upper seal edge
- b_2 Distance between cables/cable trays and the side seal edge
- b_3 Distance between cables/cable tray and the lower seal edge
- b_4 Distance between metal pipes and all seal edges
- b_5 Distance between plastic pipes and all seal edges

Service support construction


First support for all services at 450 mm, except cable trays at 250 mm.

C.1.2 Wall constructions - Maximum seal dimensions flexible or rigid wall

C.1.2.1 Multimastic FB1 - 2x 50 mm no aperture framing



Position seal:
right, left or anywhere
in between

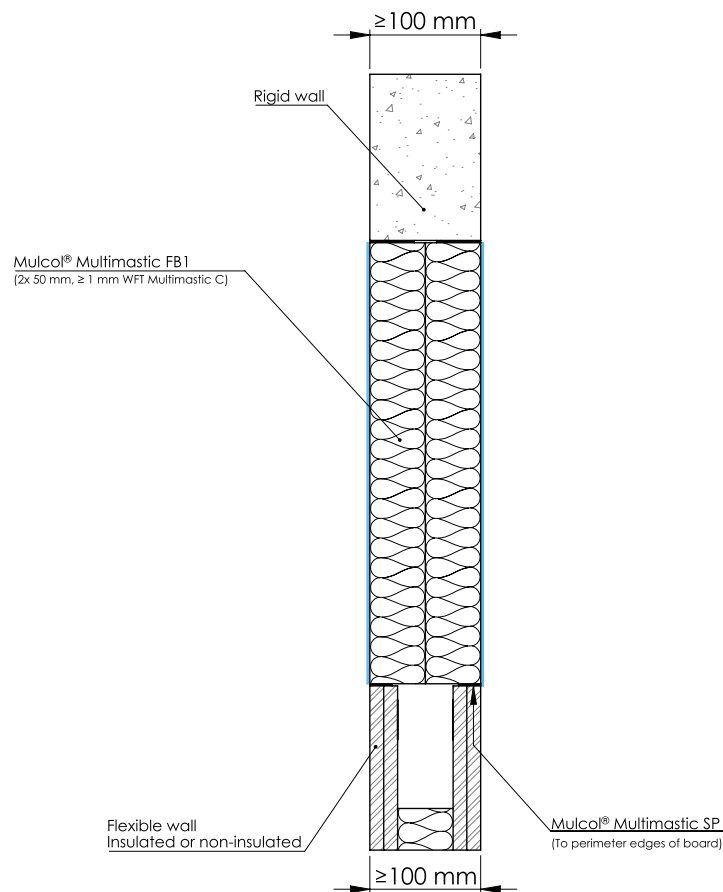


Drawing: PBfw.E-BS-MFB1.2.10


Services	Classification
Maximum seal size 1500 x 2500 mm (width x height or height x width) With a maximum surface of 3 m ²	EI 60
Maximum circular seal size Ø 1954 mm	
Maximum seal size 1200 x 1200 mm With a maximum surface of 1.44 m ²	EI 60, E 90
Maximum circular seal size Ø 1354 mm	
Maximum seal size 625 x 475 mm (w x h) With a maximum surface of 0.24 m ²	EI 120
Maximum circular seal size Ø 550 mm	

C.1.2 Wall constructions - Maximum seal dimensions flexible or rigid wall

C.1.2.2 Multimastic FB1 - 2x 50 mm with aperture framing



Position seal:
right, left or anywhere
in between

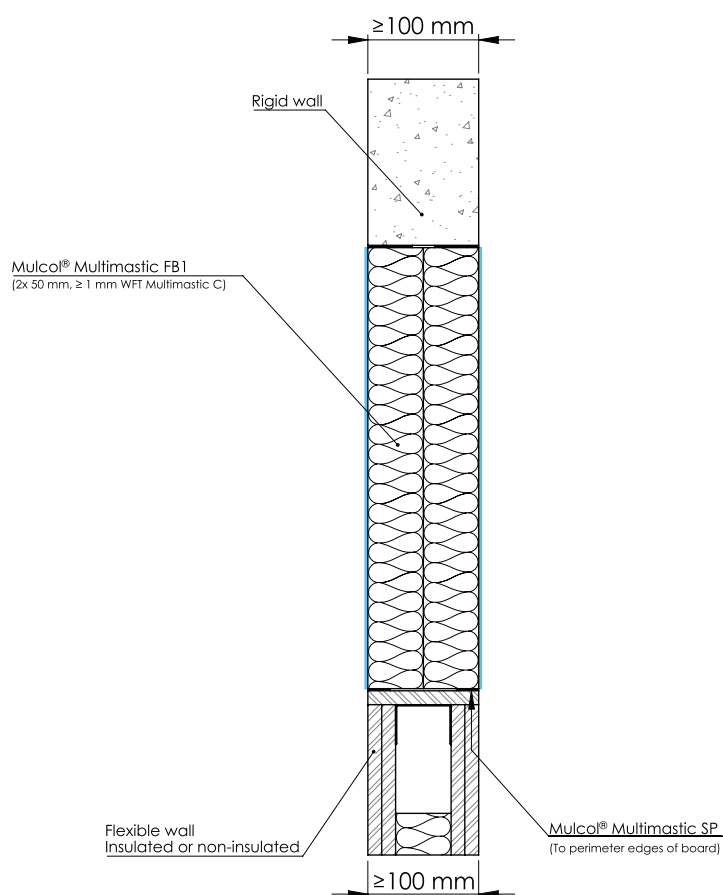


Drawing: PBfw.E-BS-A-MFB1.2.10

Services	Classification
Maximum seal size 1500 x 2500 mm (width x height or height x width) With a maximum surface of 3 m ²	EI 120
Maximum circular seal size Ø 1954 mm	
Maximum seal size 1200 x 2000 mm (width x height or height x width) With a maximum surface of 2.44 m ²	EI 180
Maximum circular seal size Ø 1748 mm	

C.1.2 Wall constructions - Maximum seal dimensions flexible or rigid wall

C.1.2.3 Multimastic FB1 - 2x 50 mm - Pattress

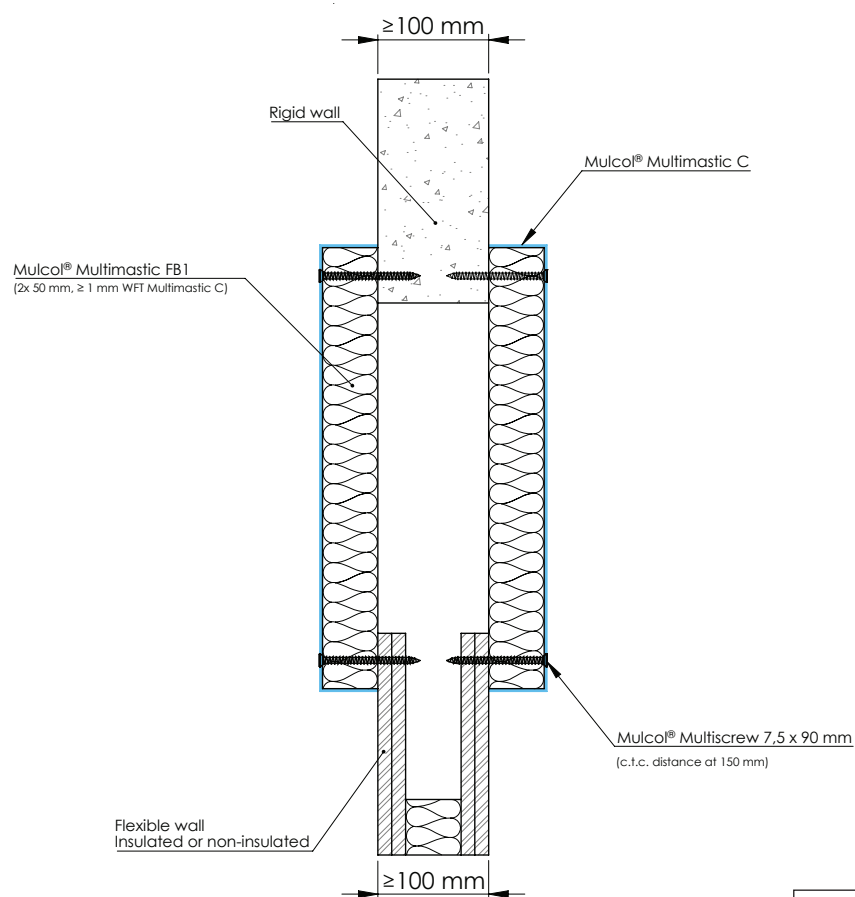


Drawing: PBPfw-BS-MFB1.2.10


Services	Classification
Maximum seal size 750 x 1250 mm (width x height or height x width) With a maximum surface of 0.75 m ²	EI 120
Maximum circular seal size Ø 1093 mm	

C.1.2 Wall constructions - Maximum seal dimensions flexible or rigid wall

C.1.2.4 Multimastic FB2 - 1x 60 mm with aperture framing



Position seal:
right, left or anywhere
in between

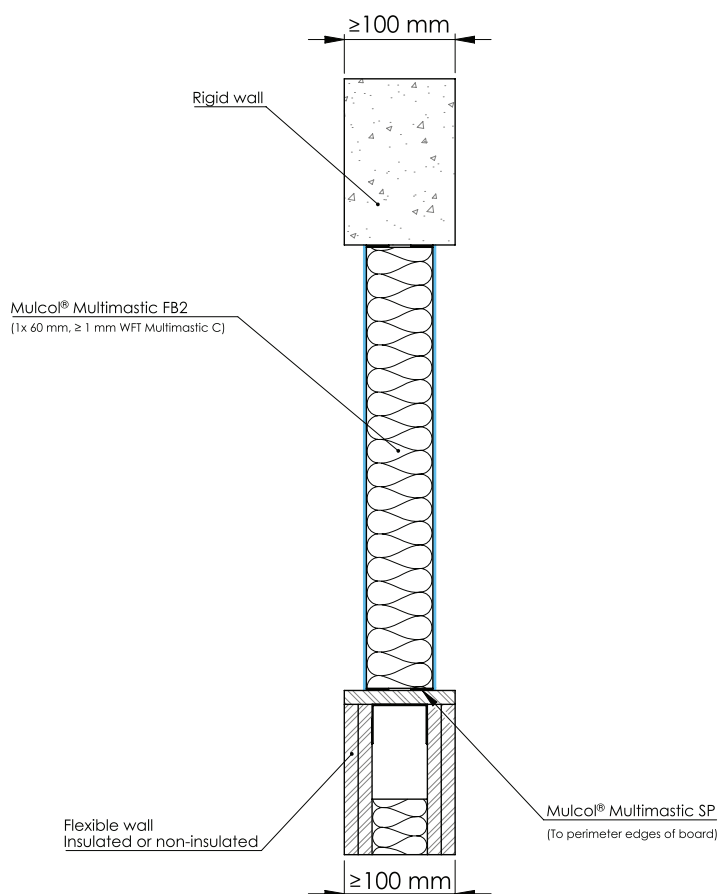


Drawing: PBfw.E-BS-MFB2.1.10

Services	Classification
Maximum seal size 1500 x 2500 mm (width x height or height x width) With a maximum surface of 3.0 m ²	EI 60
Maximum circular seal size Ø 1954 mm	
Maximum seal size 1200 x 1200 mm With a maximum surface of 1.44 m ²	EI 60, E 90
Maximum circular seal size Ø 1354 mm	
Maximum seal size 563 x 525 mm (width x height or height x width) With a maximum surface of 0.24 m ²	EI 90
Maximum circular seal size Ø 548 mm	
Maximum seal size 450 x 420 mm (width x height or height x width) With a maximum surface of 0.19 m ²	EI 120
Maximum circular seal size Ø 491 mm	

C.1.2 Wall constructions - Maximum seal dimensions flexible or rigid wall

C.1.2.5 Multimastic FB2 - 1x 60 mm with aperture framing

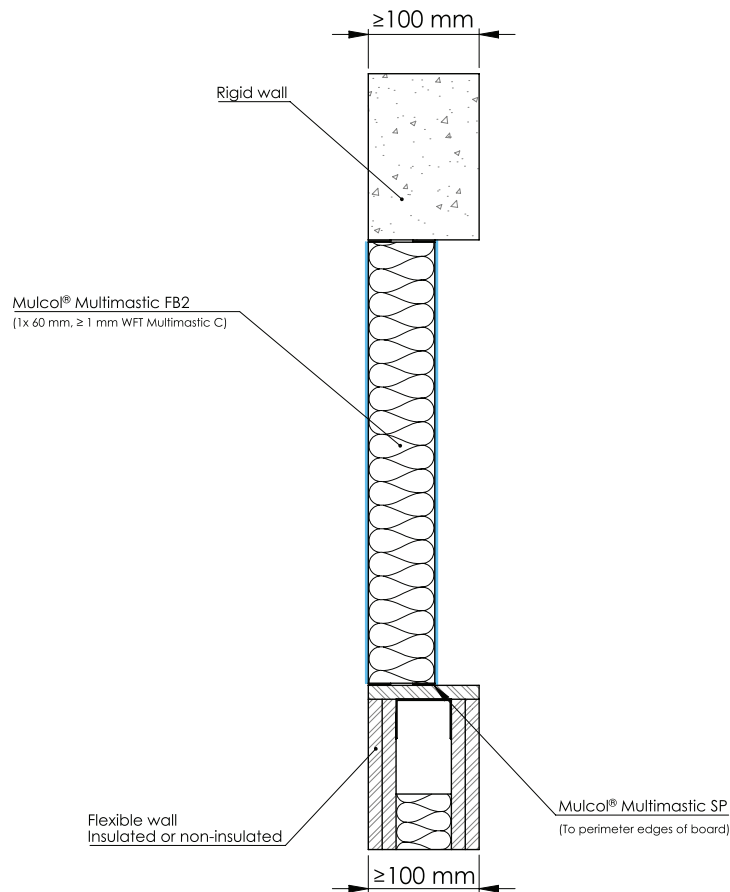


Drawing: PBfw.E-BS-fs-MFB2.1.10


Services	Classification
Maximum seal size 1500 x 2500 mm (width x height or height x width) With a maximum surface of 3.0 m ²	EI 60
Maximum circular seal size Ø 1954 mm	
Maximum seal size 1200 x 1200 mm With a maximum surface of 1.44 m ²	EI 60, E 90
Maximum circular seal size Ø 1354 mm	
Maximum seal size 563 x 525 mm (width x height or height x width) With a maximum surface of 0.24 m ²	EI 90
Maximum circular seal size Ø 548 mm	
Maximum seal size 450 x 420 mm (width x height or height x width) With a maximum surface of 0.19 m ²	EI 120
Maximum circular seal size Ø 491 mm	

C.1.3 Wall constructions - Maximum seal dimensions rigid wall

C.1.3.1 Multimastic FB2 - 2x 60 mm with cavity ≤ 30 mm



Position seal:
right, left or any in between

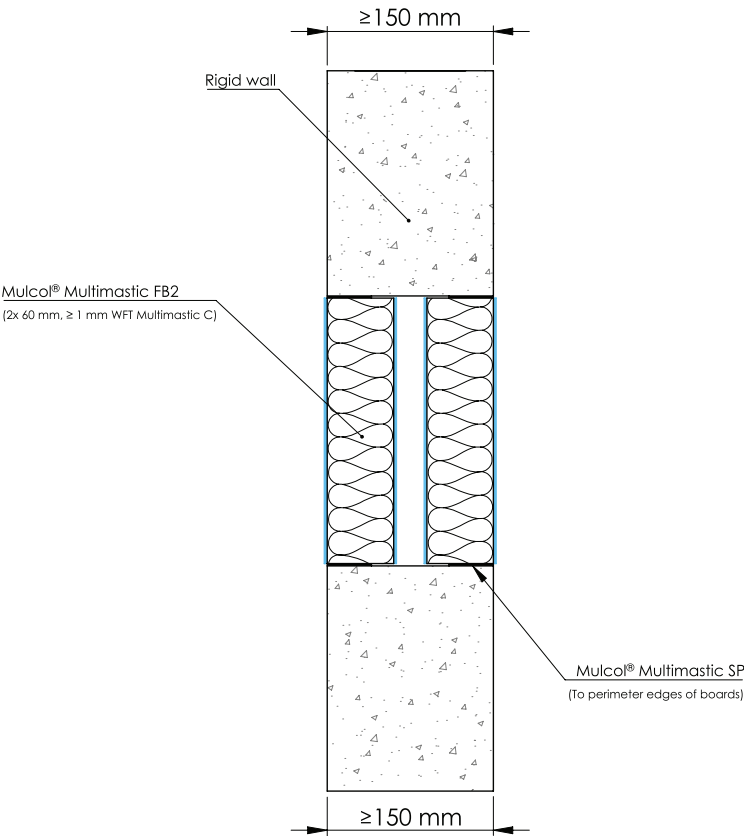


Drawing: RW150.E-BS-MFB2.2.10

Services	Classification
Maximum seal size 1500 x 1500 mm With a maximum surface of 1.8 m ²	EI 240
Maximum circular seal size Ø 1354 mm	

C.1.3 Wall constructions - Maximum seal dimensions rigid wall

C.1.3.2 Multimastic FB2 - 2x 60 mm - Pattress fixed to wall

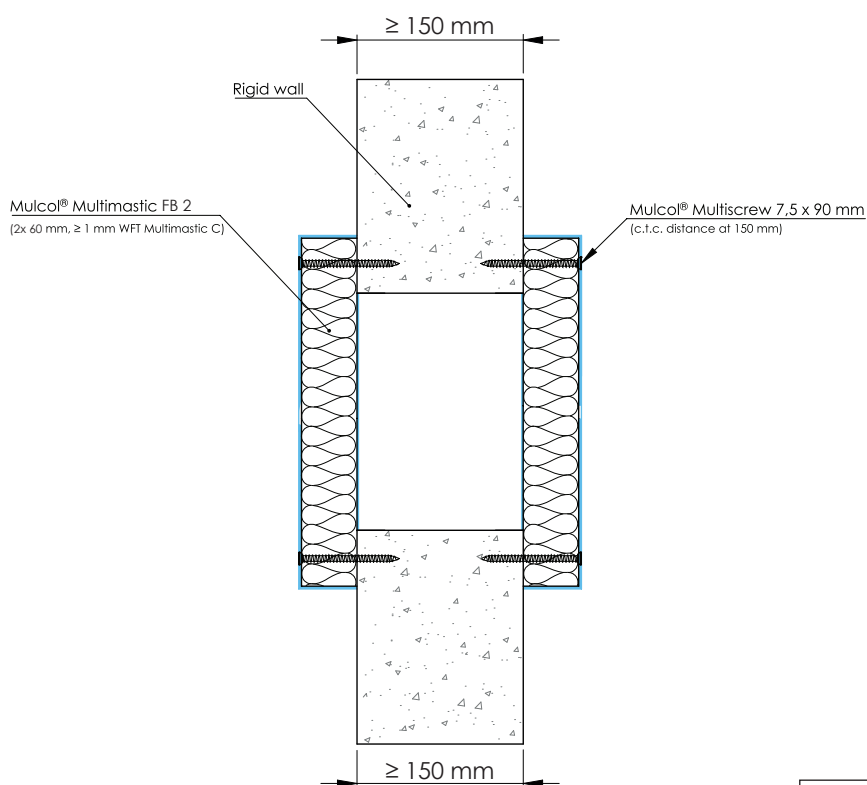

Drawing: PBPrw150.E-BS-MFB2.2.10

Services

Maximum seal size 750 x 600 mm (width x height or height x width)
With a maximum surface of 0.45 m²


Maximum circular seal size Ø 757 mm

Classification

EI 240

C.1.4 Wall constructions - Maximum seal dimensions flexible or rigid wall

C.1.4.1 Multimortar - ≥ 100 mm

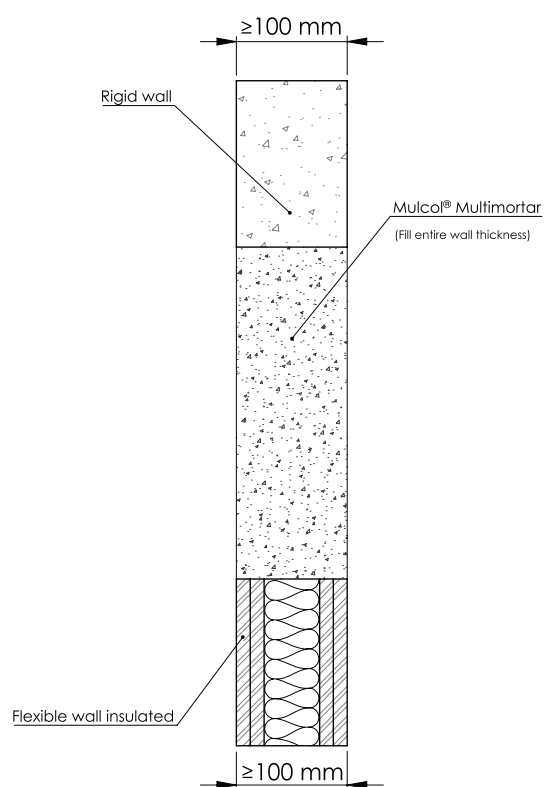


Drawing: FW.E-BS-MM1.2.10

Services	Classification
Maximum seal size 1500 x 2500 mm (width x height or height x width) With a maximum surface of 3 m ²	EI 120
Maximum circular seal size Ø 1954 mm	
Maximum seal size 1200 x 2000 mm (width x height or height x width) With a maximum surface of 2.4 m ²	EI 180
Maximum circular seal size Ø 1748 mm	

C.1.4 Wall constructions - Maximum seal dimensions flexible or rigid wall

C.1.4.2 Multimortar + Mulcol Multimastic FB system - ≥ 100 mm

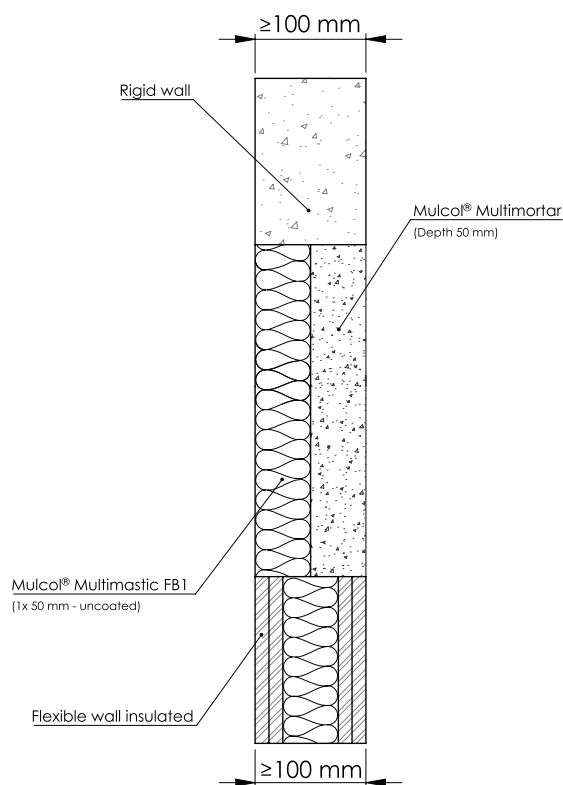


Drawing: FW.E-BS-MM2.5.10

Services	Classification
Maximum seal size 1500 x 2500 mm (width x height or height x width) With a maximum surface of 3 m ²	EI 60
Maximum circular seal size Ø 1954 mm	
Maximum seal size 1200 x 1200 mm (width x height or height x width) With a maximum surface of 1.44 m ²	EI 60, E 90
Maximum circular seal size Ø 1354 mm	
Maximum seal size 625 x 750 mm (width x height or height x width) With a maximum surface of 0.38 m ²	EI 120
Maximum circular seal size Ø 691 mm	

C.1.4 Wall constructions - Maximum seal dimensions flexible or rigid wall

C.1.4.3 Multimortar 25 mm + Multimastic FB + Multimortar 25 mm - ≥ 100 mm


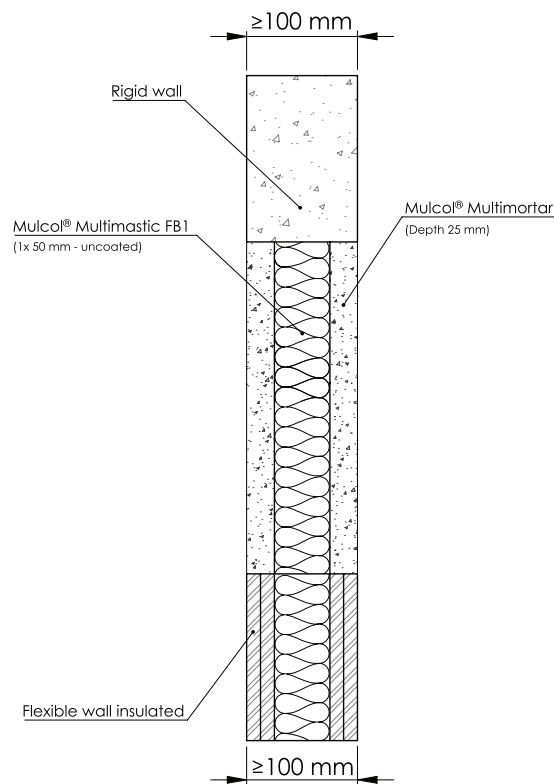


Drawing: FW.E-BS-MM3.4.10

Services	Classification
Maximum seal size 1500 x 2500 mm (width x height or height x width) With a maximum surface of 3 m ²	EI 60
Maximum circular seal size Ø 1954 mm	
Maximum seal size 1200 x 1200 mm (width x height or height x width) With a maximum surface of 1.44 m ²	EI 60, E 90
Maximum circular seal size Ø 1354 mm	
Maximum seal size 625 x 750 mm (width x height or height x width) With a maximum surface of 0.38 m ²	EI 120
Maximum circular seal size Ø 691 mm	

C.1.5 Wall constructions - Maximum seal dimensions CLT wall

C.1.5.1 Multimastic FB1 - 2x 50 mm no aperture framing

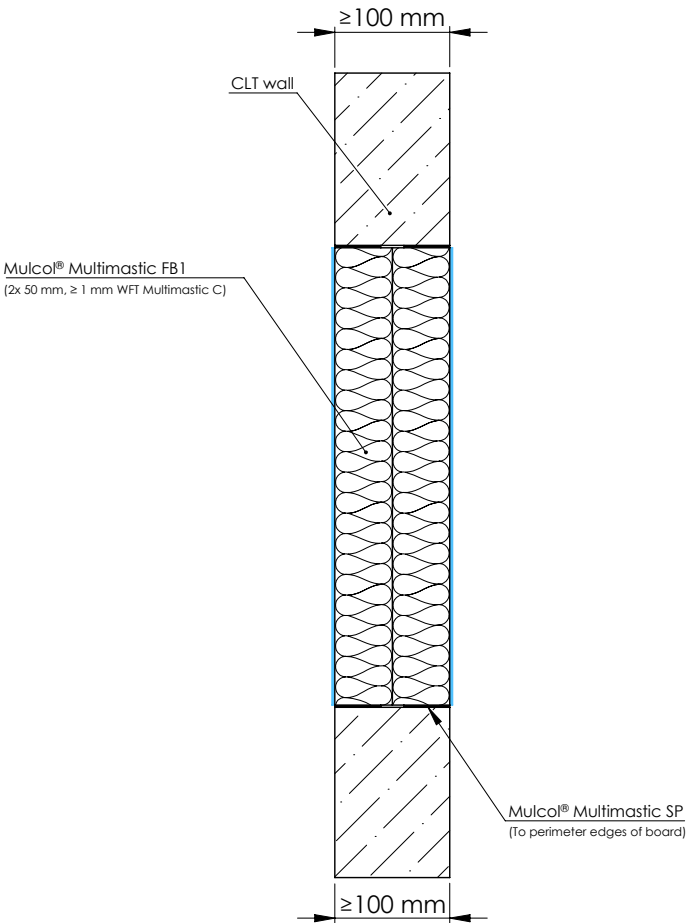


Drawing: WCLT.E-BS-MFB1.2.10


Services	Classification
Maximum seal size 500 x 500 mm With a maximum surface of 0.25 m ²	EI 90
Maximum circular seal size Ø 564 mm	

C.1.6 Wall constructions - Maximum seal dimensions Sandwich panel

C.1.6.1 Maximum seal dimensions - Multimastic FB1 - 2x 50 mm no aperture framing



Position seal:
right, left or anywhere
in between

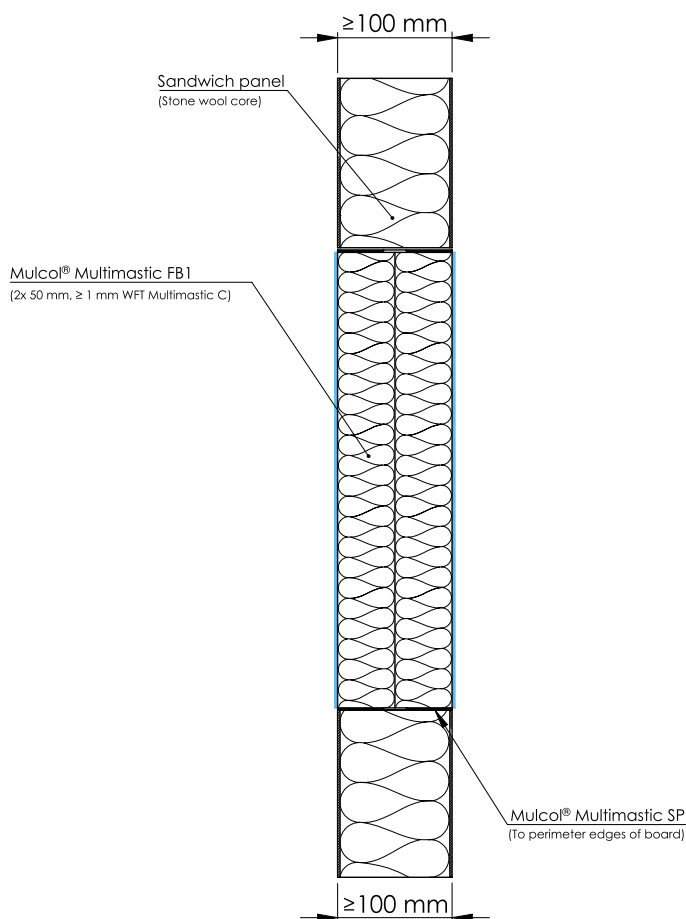


Drawing: SW.E-BS_B-MFB1.2.10


Services	Classification
Maximum seal size 500 x 600 mm (width x height or height x width) With a maximum surface of 0.3 m ²	EI 90
Maximum circular seal size Ø 618 mm	

C.1.6 Wall constructions - Maximum seal dimensions Sandwich panel

C.1.6.2 Maximum seal dimensions - Multimastic FB1 - 2x 50 mm with aperture framing



Position seal:
right, left or anywhere
in between

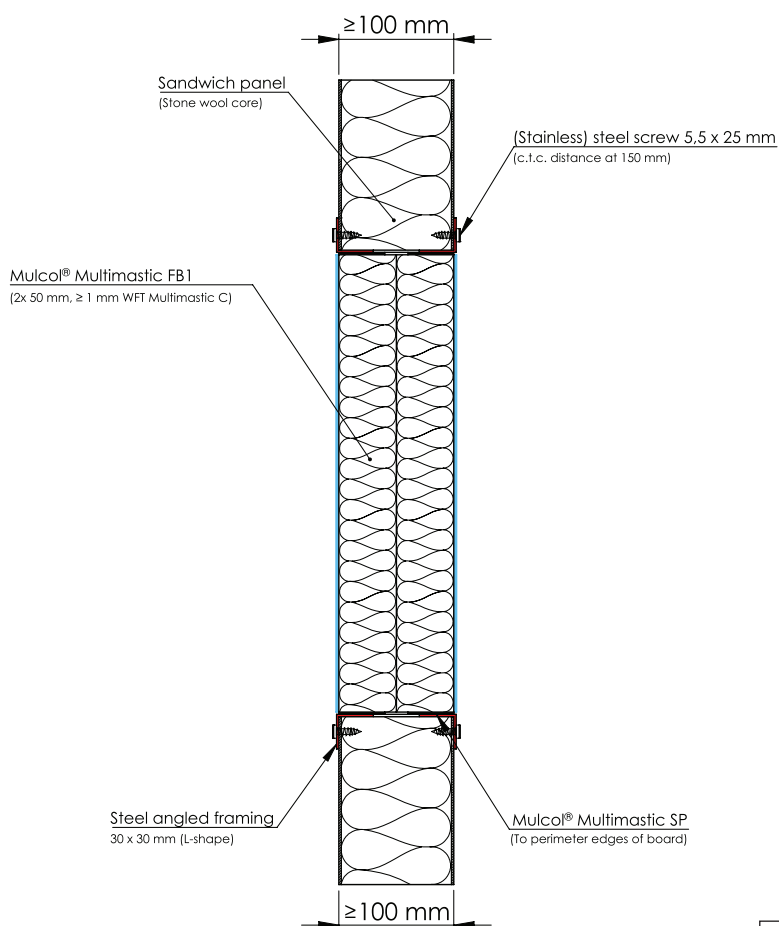

Drawing: SW.E-BS-MFB1.2.10

Services

Maximum seal size 1200 x 1000 mm (width x height or height x width)
With a maximum surface of 1.2 m²


Maximum circular seal size Ø 1236 mm

Classification

EI 120

C.2 Rigid floor - General

C.2.1 Mutual distances & distance to first support

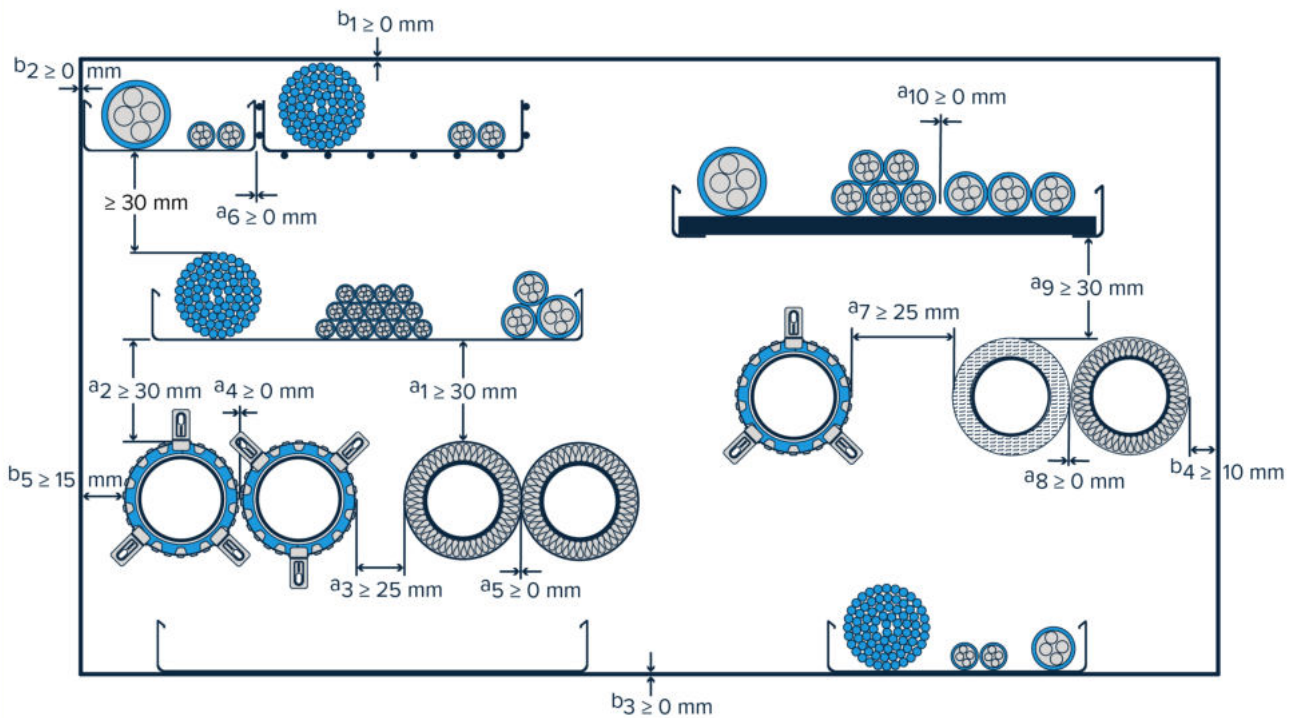

Mutual distances Mixed Penetration Seal


- a_1 Distance between cables/cable trays and metal pipes
- a_2 Distance between cables/cable trays and plastic pipes
- a_3 Distance between metal pipes and plastic pipes
- a_4 Distance between plastic pipes
- a_5 Distance between metal pipes with non-combustible insulation
- a_6 Distance between cable trays
- a_7 Distance between plastic pipes and pipes with combustible insulation
- a_8 Distance between pipes with non-combustible insulation and pipes with combustible insulation
- a_9 Distance between cables/cable trays and pipes with combustible insulation
- a_{10} Distance between cables stacked together or in a row
- b_1 Distance between cables/cable trays and the upper seal edge
- b_2 Distance between cables/cable trays and the side seal edge
- b_3 Distance between cables/cable tray and the lower seal edge
- b_4 Distance between metal pipes and all seal edges
- b_5 Distance between plastic pipes and all seal edges

Service support construction


First support for all services at 450 mm, except cable trays at 250 mm.

C.2.2 Rigid floor - Multimastic C - Maximum seal dimensions

C.2.2.1 Multimastic FB1 - 2x 50 mm no cavity



Position seal:
top, bottom or anywhere
in between

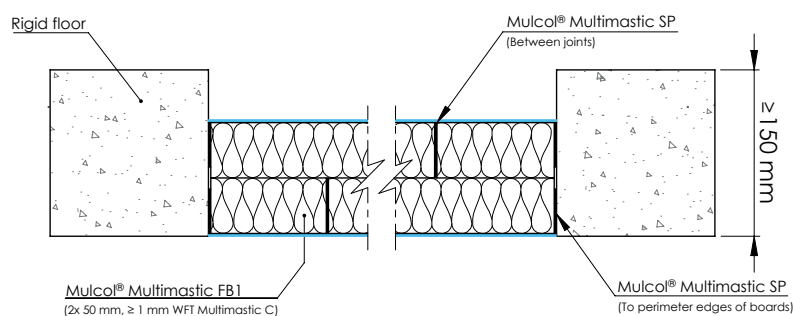


Drawing: PBrf.E-BS-MFB1.2.10


Services	Classification
Maximum seal size 1200 x 1200 mm	EI 90, E 120
Maximum seal size 9000 x 900 mm	
Maximum circular seal size Ø 1354 mm	
Maximum seal size 600 x 400 mm	EI 120
Maximum circular seal size Ø 553 mm	
Maximum seal size 450 x 450 mm	EI 240
Maximum circular seal size Ø 508 mm	

C.2.2 Rigid floor - Multimastic C - Maximum seal dimensions

C.2.2.2 Multimastic FB1 - 2x 50 mm cavity ≤ 50 mm



Position seal:
top, bottom or anywhere
in between

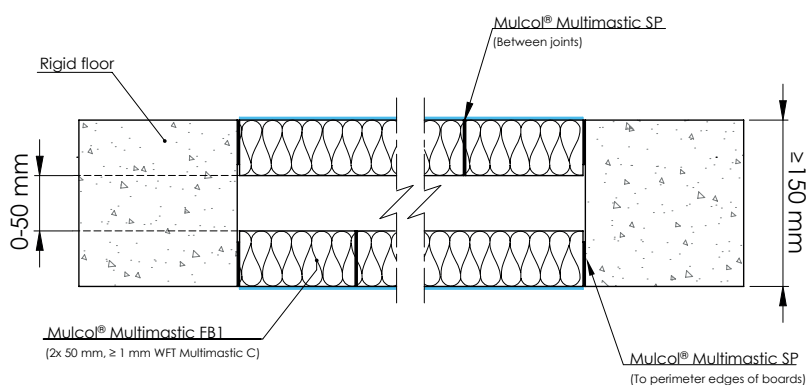


Drawing: PBrf.E-BS-MFB1.2.10.C


Services	Classification
Maximum seal size 1200 x 1200 mm Maximum seal size 9000 x 900 mm	EI 90, E 120
Maximum circular seal size Ø 1354 mm	
Maximum seal size 1200 x 600 mm Maximum seal size 9000 x 600 mm	EI 120
Maximum circular seal size Ø 957 mm	
Maximum seal size 450 x 450 mm Maximum circular seal size Ø 508 mm	EI 240

C.2.2 Rigid floor - Multimastic C - Maximum seal dimensions

C.2.2.3 Multimastic FB2 - 1x 60 mm



Position seal:
top, bottom or anywhere
in between

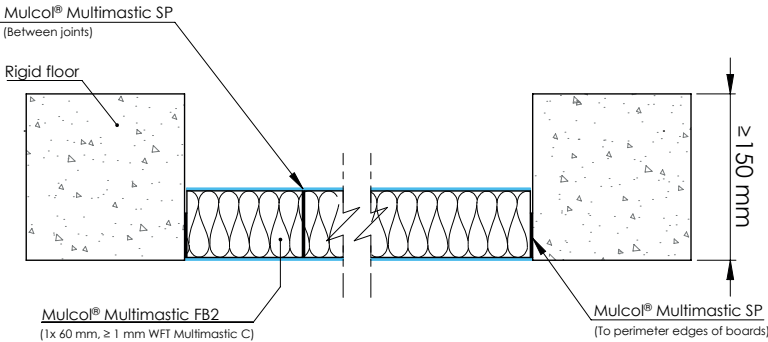


Drawing: PBrf.E-BS-MFB2.1.10

Services	Classification
Maximum seal size 1200 x 1200 mm	EI 90, E 120
Maximum seal size 9000 x 900 mm	
Maximum circular seal size Ø 1354 mm	

C.2.3 Rigid floor - Multimortar - Maximum seal dimensions

C.2.3.1 Multimortar - ≥ 100 mm

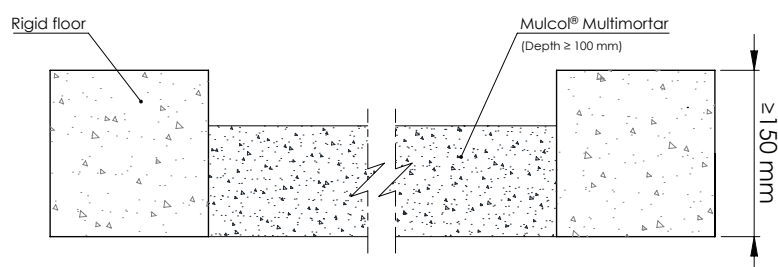


Drawing: RF.E-BS-MM1.3.10

Services	Classification
Maximum seal size 1200 x 1000 mm Maximum seal size 8800 x 880 mm	EI 180
Maximum circular seal size $\varnothing$ 1236 mm	
Maximum seal size 1000 x 750 mm Maximum circular seal size $\varnothing$ 977 mm	EI 240

C.2.3 Rigid floor - Multimortar - Maximum seal dimensions

C.2.3.2 Multimortar + Mulcol Multimastic FB system - ≥ 100 mm

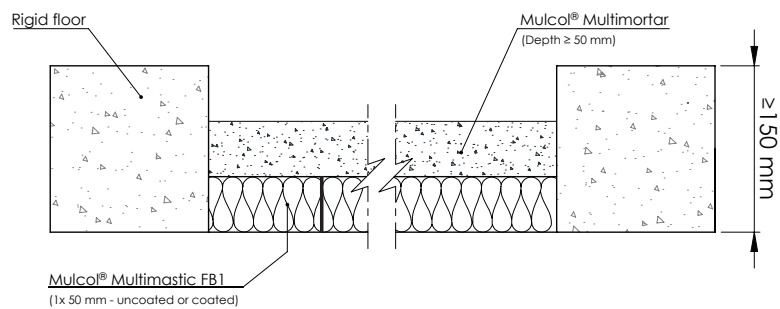


Drawing: RF.E-BS-MM2.5.10

Services	Classification
Maximum seal size 1200 x 1000 mm	EI 180
Maximum seal size 8800 x 880 mm	
Maximum circular seal size $\varnothing$ 1236 mm	

C.2.3 Rigid floor - Multimortar - Maximum seal dimensions

C.2.3.3 Multimortar + Mulcol Multimastic FB system - ≥ 150 mm

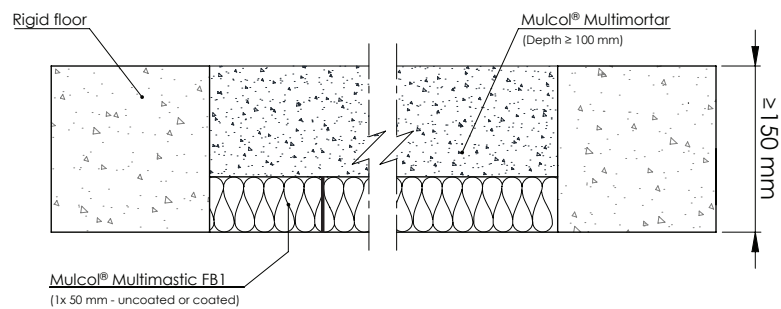


Drawing: RF.E-BS-MM2.2.10


Services	Classification
Maximum seal size 1200 x 1000 mm	EI 180
Maximum seal size 8800 x 8800 mm	
Maximum circular seal size $\varnothing$ 1236 mm	
Maximum seal size 450 x 450 mm	EI 240
Maximum circular seal size $\varnothing$ 508 mm	

C.2.4 CLT floor - Multimastic C - Maximum seal dimensions

C.2.4.1 Multimastic FB1 - 2x 50 mm no cavity



Position seal:
top, bottom or anywhere
in between

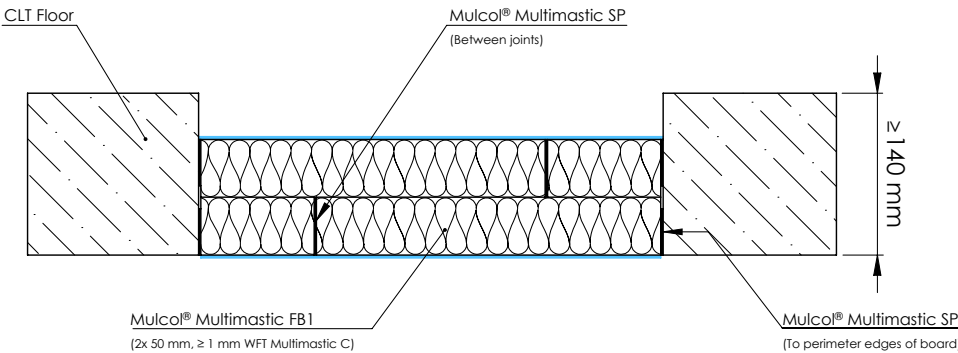

Drawing: FCLT.E-BS-MFB1.2.10

Services	Classification
Maximum seal size 500 x 800 mm	EI 120
Maximum circular seal size Ø 713 mm	

C.3 Wall configurations

C.3.1 Allowed wall configurations

The use of Mulcol® Multimastic C is allowed in all double sided flexible wall constructions (with or without insulation) of the same or higher fire resistance classification in accordance with EN 13501-2, with a lining made of gypsum boards (EN 520) or Calcium Silicate boards which are CE marked for the application as lining of flexible wall, if their construction is in accordance with the rules given below.


Field of direct application rules for double-sided flexible wall constructions:

- flexible wall constructions as shown in solutions given in Annex A of this document;
- flexible wall constructions with the same or higher number of board layers of the same or higher board thickness on each side of the wall, with insulation of any type or without insulation;
- flexible wall constructions with a reduced number of board layers but the same or higher board thickness on each side of the wall as tested, with insulation of any type or without insulation;
- flexible wall constructions with timber studs, no part of the penetration seal closer than 100 mm to any stud or nogging piece, the cavity closed between the penetration seal and the stud/nogging piece with minimum 100 mm of insulation of class A1 or A2 in accordance with EN 13501-1;
- rigid constructions of an overall thickness equal to or greater than that given in the solutions in Annex A and a minimum density of 350 kg/m³. In case of hollow brick wall the same rules regarding aperture framing apply as for double-sided flexible walls.

Allowed constructions (not limited by):


Flexible walls, not insulated, partially removed insulation or fully insulated with any type of insulation.

e.g.:

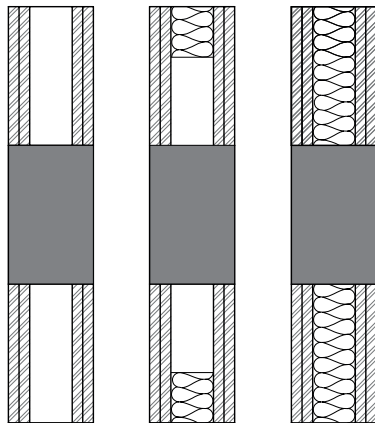

Double stud walls, separated by ≥ 0 mm, not insulated, partially insulated or fully insulated with any type of insulation.

e.g.:

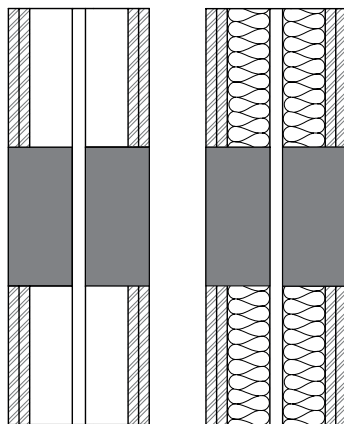


C.3 Wall configurations

C.3.1 Allowed wall configurations

Walls with a reduced number of board layers but the same or higher overall lining thickness on each side of the wall as shown in the solutions in Annex A.

Walls with a higher number of board layers, where individual boards are thinner yet the overall lining thickness is at least that of shown in the solutions in Annex A.

e.g.:

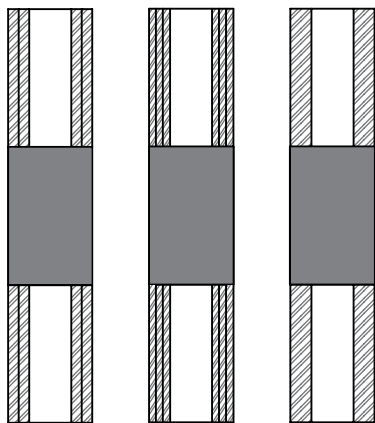

Rigid walls with a density of $\geq 350 \text{ kg/m}^3$

e.g.:

