

# ENVIRONMENTAL PRODUCT DECLARATION

as per /ISO 14025/ and /EN 15804/

Owner of the Declaration	ROCKWOOL International A/S (ROCKWOOL Nordics)
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Publisher	V@ÁP[!, ^* æ ÅÓÓÁQ ~ } áæá }
Declaration number	EPD-RWI-20190050-CBD1-EN
Registration number	NEPD-1762-735-EN
Issue date	17/04/2019
Valid to	16/04/2024

ROCKWOOL stone wool thermal insulation  
ROCKWOOL International A/S (ROCKWOOL Nordics)



[www.ibu-epd.com](http://www.ibu-epd.com) / <https://epd-online.com>



## General Information

ROCKWOOL International A/S  
(ROCKWOOL Nordics)

**Programme holder**

IBU - Institut Bauen und Umwelt e.V.  
Panoramastr. 1  
10178 Berlin  
Germany

**Declaration number**

EPD-RWI-20190050-CBD1-EN

**This declaration is based on the product category rules:**

Mineral insulating materials, 12.2018  
(PCR checked and approved by the SVR)

**Issue date**

17/04/2019

**Valid to**

16/04/2024



Prof. Dr.-Ing. Horst J. Bossenmayer  
(President of Institut Bauen und Umwelt e.V.)



Dr. Alexander Röder  
(Head of Board IBU)

ROCKWOOL stone wool Thermal  
Insulation

**Owner of the declaration**

ROCKWOOL International A/S (ROCKWOOL Nordics)  
Hovedgaden 501  
DK-2640 Hedehusene  
Capital Region of Denmark

**Declared product / declared unit**

1m<sup>2</sup> of stone wool thermal insulation product with a thermal resistance of R=1 m<sup>2</sup>K/W.

**Scope:**

The spectrum of products, which are contained in this EPD refer to thermal insulation products, for use in building applications with a range of densities from 25 to 285 kg/m<sup>3</sup>. The declared reference product in this EPD is 1m<sup>2</sup> B-plate stone wool slab for insulation of new and existing buildings in walls, attics, joints, partitions etc. It has a thermal resistance of R<sub>D</sub>=1 m<sup>2</sup> K/W. The corresponding thermal conductivity has been measured at a mean temperature of 10°C as per EN 12939.

The ROCKWOOL thermal products presented in this declaration are produced in Moss (Norway), Trondheim (Norway), Vamdrup (Denmark) and Doense (Denmark). The properties of the ROCKWOOL products from the different production sites are identical. The EPD is based on LCA inventory data from the 4 plants. The reference flow is a weighted average based on the distribution of production capacity between the 4 plants. For additional information, all 4 plants are certified *with ISO 14001:2015 Environmental management systems -- Requirements with guidance for use*. Applicability for ISO 14001:2015 is development, production, sale and supply of Rockwool. Certificates will be sent on request.

For other specific ROCKWOOL products, the environmental impacts and indicators are determined by applying the appropriate scaling factors and products' R<sub>D</sub> value (please refer to section "Technical Data" for guidance).


The LCA results of the facings are listed in the Annex, accompanying this EPD. The production data correspond to the year 2017.

The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

**Verification**

The standard /EN 15804/ serves as the core PCR  
Independent verification of the declaration and data  
according to /ISO 14025:2010/

internally  externally



Dr. Frank Werner  
(Independent verifier appointed by SVR)

## Product

### Product description / Product definition

ROCKWOOL stone wool thermal insulation is a firesafe material for insulation against heat, cold, fire, vibrations and noise.

It is traditionally made from volcanic rock (typically basalt or dolomite), an increasing proportion of recycled material, and a low percentage of resin binder.

The unfaced and uncoated synthetic resin-bonded stone wool thermal insulation materials described in this declaration are produced in the form of slabs, granulate, rolls or shade articles in the density range from 25 up to 285 kg/m<sup>3</sup>.

For other products please refer to the scaling factors and products R<sub>D</sub> value. The scaling factors, presented in the tables below, show how much to multiply the impacts by, in order to obtain a thermal resistance of R<sub>D</sub>=1 m<sup>2</sup> K/W with other ROCKWOOL products.

Stone wool insulation products marked with an asterisk (\*) in the table are sold with extra features for special applications e.g. with a fleece, aluminium foil etc. The extra features are demonstrated in the Annex. The impacts from the additional features shall be added to the final result.

The scaling calculation shall follow the following formula:

$$\text{Environmental Impact per m}^2 \text{ product X-with facing} = \text{Environmental Impact}_{\text{reference product}} * \text{scaling factor} + \text{Environmental Impact}_{\text{facing material}}$$

Note that, for different R values (where the thickness is not equal with the thermal conductivity) the final scaling factor is given by multiplication with the real R value. This can be explained below:

$$\text{Environmental Impact}_{\text{Real}} = \text{Environmental impact}_{\text{R=1}} * \text{R}_{\text{Real}}$$

Product Name	Scaling Factor	Product Name	Scaling Factor	Product Name	Scaling Factor	Product Name	Scaling Factor					
A-Batts	1,1	Hardkile / HardRock Energy Takfall / HardRock Takfall	6,8	Løsull *	28 kg/m <sup>3</sup>	1,2	Stålrørgeskiva	37	1,1			
A-Murbatts	1,1	Hardkile 50/65 / HardRock Energy Takfall 50/65 / HardRock Takfall 50/65	5,1		60 kg/m <sup>3</sup>	2,3		40	1,1			
A-Pladebatts 10	2,1	Hardkile 65/80 / HardRock Energy Takfall 65/80 / HardRock Takfall 65/80	4,9		65 kg/m <sup>3</sup>	2,5	Stålstenderplate		1,1			
A-Plate	1,2	Hardkile Kehil / Hardrock Takfall Kileplate / Hardrock Takfall Kilekiva	6,8		70 kg/m <sup>3</sup>	2,7	50mm	4,1				
A-Rullebatts	1,2	Hardrock Elementbatts	2,2	Markplate /Markskiva	5,0	60mm	3,6	80mm	4,2			
A-Takstolplate m/papir	1,1	180mm	3,6	Murbatts	32	2,1	Super A-Batts DANHAUS		1,6			
BD-60 FLEXIBATTS	1,3	150mm	3,7	34	1,4	Super Vent-Batts		100mm	2,2			
BETONELEMENTSBATTS 34/BETONELEMENTPLATE 34	2,4	120mm	3,9	37	1,1	125mm	2,1	150mm	2,1			
BLÅSEULL *	60 kg/m <sup>3</sup>	2,3	100mm	4,0	MURKRONEPLADE TW1	4,1	150mm	2,1	175mm	2,1		
	65 kg/m <sup>3</sup>	2,5	80mm	4,1	Murplate	1,5	200mm	2,0	250mm	2,0		
	70 kg/m <sup>3</sup>	2,7	50mm	4,7	Nivell /Subfloor-Skiva	1,5	75mm	2,3	Takkil	5,7		
B-Plate	1,0	180mm	3,7	OEMA-BATTS	1,1	85	3,5	200mm	3,6			
Brannplate 50	1,9	190mm	3,7	OEM Flexi A-Batts	1,2	PLATUNDERLAGSSKIVA 80	2,8	125mm	3,8			
Bygg 100	3,5	200mm	3,7	125	5,6	Raflerplate	1,0	100mm	3,8			
Bygg 90	3,2	170mm	3,8	85	2,5	REDAir BATTS	2,6	75mm	4,0			
BYGGRULLE M VINDSKYDD	1,1	120mm	3,9	ROCKFILL *	28kg/m <sup>3</sup>	1,1	Regelskiva med vindskydd	1,1	50mm	4,3		
CONCRETE LAMELLA 39	2,5	100mm	4,0	35kg/m <sup>3</sup>	1,3	28kg/m <sup>3</sup>	1,1	Tetteremse		1,5		
Drensplate	4,1	70mm	4,1	43kg/m <sup>3</sup>	1,6	35kg/m <sup>3</sup>	1,3	TF-Kile / TF-Fallplate / Rändalskil TF	6,8			
Duo Energy	5,4	80mm	4,2	50kg/m <sup>3</sup>	1,9	ROCKORBIT	2,0	TF-Plade (28-30mm) / TF-Plade (20-30) / Takboard (20-30mm)	6,8			
Facadelamel Energy	2,9	60mm	4,2	ROCKPROFIL Batts	180mm	1,9	TF-Plade (31-100mm) / TF-Plade (31-100) Takboard (31-100mm)	6,4				
Fallplate 0-50	5,7	50mm	4,3	190mm	1,9	ROCKTORV	100mm	4,0	TF-Skotrendekile / TF-Takkile / Rändalskil 180	6,8		
Fallunderlagsplate/Fallunderlag	4,1	30mm	5,2	150mm	3,8	ROCKVEGG 33	2,3	60kg/m <sup>3</sup>	2,2	THERM 321 SKIVA	2,9	
FasadBatts	3,3	65 kg/m <sup>3</sup>	2,4	180mm	3,8	Roxull Vindsul 45kg/m <sup>3</sup>	1,9	50mm	4,4	TOPROCK CTF Lamella	2,5	
FlexEkstrem 33	1,7	I-Plate A	1,1	ROCKVEGG 33	2,3	RP-KGD	6,2	TOPROCK Lamella	2,5	TOPROCK TERRACE Lamella	6,6	
FLEXI	Flexi 35L Plate	1,2	Kasserendekile / TF-Renneplate / Fallränna TF	6,8	Roxull Vindsul 45kg/m <sup>3</sup>	1,9	SKALMU RSSKIVA	1,9	TOPROCK TERRACE Topboard	12,0	TOPROCK Topboard	6,4
	Flexi A-Plate	1,1	Kondensplade	6,8	RP-KGD	6,2	SKILLVÆGGSBatts	1,2	TOPROCK Trapetsstav / Trapetsstavar	2,8	TRINLYDSBATTS	5,0
	Flexi A-Plate papir	1,1	Latteremse	1,5	SKILLVÆGGSBatts	1,2	Sonorock Plus	1,1	TRINNYLplate / STEGLJUDSSKIVA	5,7	Tung Plate 150	4,7
	Flexibatts	1,2	Lett-Tak 35L	1,2	Sonorock Plus	1,1	SONOROCK WLG35	1,4	Underlag Energy	3,3	VÄGGBOARD	5,7
	Flexibatts 32	2,1	Lett-Tak 37	1,1	SONOROCK WLG35	1,4	STØPEPLATE PLUSS	100mm	3,8	Västskustskiva	3,9	
Flexibatts 34	1,4	Lindab Plate Base	3,5	150mm	3,7	150mm	3,7					
Flexibatts 35/Flexi 35 A-Plate	1,3	Lindab Plate Plus	5,6	50mm	4,3	80mm	4,0					
Flexibatts 37	1,2	LYDABSORPTION STAV	1,1									
Floorrock	SE 15-5	3,4	Lydplate	1,9								
	TE	3,6	Lydunder lagsplade/ Ljudunder lagskiva/ Lydunder lagsplate	3,8								
GRANULAT PRO *	28 kg/m <sup>3</sup>	1,1										
	50 kg/m <sup>3</sup>	1,9										
	35 kg/m <sup>3</sup>	1,3										
	43 kg/m <sup>3</sup>	1,6										

For the placing on the market of the products covered in this EPD, as presented in the table above, the Regulation (EU) No. 305/2011 Construction Products Regulation (CPR)/ applies in the European Union/European Free Trade Association (EU/EFTA) (with the exception of Switzerland). The product needs a declaration of performance taking into consideration /EN 13162:212+A1:2015/: "Thermal insulation products for buildings. Factory made mineral wool (MW) products - Specification" and the CE-marking. Small exceptions are the products with (\*) on the table above, where /EN 14064-1:2010/: "Thermal insulation products for buildings. In-situ formed loose-fill mineral wool (MW) products - Specification for the loose-fill products before installation" and the CE-marking apply. For the application and use the respective national provisions apply.

Finally, for the products with (\*\*) on the table above the respective national provisions at the place of use apply for the use and application of the product.

### Application

The spectrum of products, which are contained in this EPD refer to thermal insulation products, in the form of slabs, rolls, granulate or shade articles for use in building applications with a range of densities from 25 to 285 kg/m<sup>3</sup>.

### Technical Data

For the products where the above range of declared properties apply, the performance data are in accordance with the declaration of performance with respect to its essential characteristics according to /EN 13162:2012+A1:2015/, "Thermal insulation products

for buildings – Factory made mineral wool (MW) products – Specification". The technical specifications for the products described in the EPD are given by the range below based on the reference standards. For the product specific characteristics please refer to the manufacturers' specifications, available online in <https://www.rockwoolgroup.com/>.

#### Technical data

Name	Value	Unit
Thermal conductivity /EN 12939 and EN 12667/	0.032 - 0.047	W/(mK)
Thickness Class /EN 823, EN 12431/	T1-T8	
Fire Class /EN 13501-1:2007+A1:2009/	A1, A2-s1, d0	
Length and width /EN 822/	≤Length ±2%, ≤Width ±1.5 %	
Compressive Strength /EN 826/	CS(10)10 to CS(10)250	
Dynamic Stiffness /EN 29052-1/	SD30 to SD90	
Dimension Stability at spec. temperature and humidity /EN 1604/	DS(70,90)	
Tensile strength perpendicular to faces /EN1607/	TR7.5 to TR10	
Water vapour diffusion resistance factor /EN12086/	MU1	
Point Load /EN12430/	PL(5)250 to PL(5)2000	

#### Base materials / Ancillary materials

The average composition used for this EPD is the following (based on average factory consumption figures for raw materials as a conservative approach):

- non-scarce natural stone and cement [75%]
- slags and other secondary or waste materials [17,5%]

- mineral oil and bonding agent [0,3%]
- binder [7,2%]

Packaging represents 7% of the final product delivered to the customer. The raw materials are non-scarce stones, secondary materials and briquettes, which are made of rock mineral wool waste, other secondary materials and cement. The binder is a water-based phenol-formaldehyde resin which is polymerized into solid resin during production of the final stone wool product and is contained in lower than 4% for general building insulation products.

The raw materials, the production process and the facing options do not contain any substances of very high concern (SVHC).

Mineral wool fibers produced by ROCKWOOL are classified as non-hazardous under /REACH/ (Regulation (EC) No 1272/2008 of the European parliament and of the council of 16 December 2008 on classification, labelling and packaging of substances and mixtures). ROCKWOOL are registered with /REACH/ under the following definition: "Man-made vitreous (silicate) fibers with random orientation with alkaline oxide and alkali earth oxide (Na<sub>2</sub>O+K<sub>2</sub>O+CaO+MgO+BaO) content greater than 18% by weight and fulfilling one of the Note Q conditions". ROCKWOOL products produced in Europe fulfill the Note Q requirements. This is certified by the independent certification body /EUCEB/ (European Certification Board for mineral wool products). More information on EUCEB can be found at [/www.euceb.org/](http://www.euceb.org/).

#### Reference service life

When used correctly, the service life of ROCKWOOL stone wool is only limited by the service life of the building component where it is placed. For the purpose of this EPD the reference service life is considered to be minimum 60 years, which is usually the assumption about the lifetime of the building where this is installed.

## LCA: Calculation rules

#### Declared Unit

The specific product, referred to in the declared unit is 1m<sup>2</sup> of B-Plate stone wool batt with a thermal resistance RD=1m<sup>2</sup>K/W.

The reference product is a 40mm thick ROCKWOOL stone wool board with a density of 25kg/m<sup>3</sup>.

For the calculation of the results in this declaration averages are formed on the basis of the production volumes at the plants. . This approach is considered conservative, as it contains increased binder composition as contained in higher density and speciality products. The unfaced and uncoated stone wool products do not display any differences in terms of the production process or production technology. For certain applications, the insulation materials are provided with a functional facing on one or both sides. For the environmental impacts of the facing options please refer to the Annex. If the product comes with a functional facing, the environmental

impacts of the unfaced product and the facing option shall be aggregated.

#### Declared unit

Name	Value	Unit
Declared Unit	1	m <sup>2</sup>
Gross density	25	kg/m <sup>3</sup>
Surface	1	m <sup>2</sup>
Weight	1	kg
Conversion factor to 1 kg	1	-

#### System boundary

##### The type of this EPD is cradle to grave.

The modules considered in the life cycle assessment as per system boundaries, outlined in section 5.5. of the /PCR/ Part A: "Calculation Rules for the Life Cycle



Assessment and Requirements on the Project Report" are described as follows:

The product stage **A1-A3** includes:

- Provision of preliminary products and energy and relevant upstream processes
- Transporting the raw materials and preliminary materials to the plant
- Production process in the plant including energy inputs and emissions
- Electricity consumption
- Waste processing up to the end-of-waste state or disposal of waste residues, during the production stage
- Production of packaging
- Manufacturing of products and co-product.

In the product system under assessment, the slags, alumina and ashes are considered co-products from the steel and coal fired electricity production respectively with the application of economic allocation so their environmental impact is accounted for. Recycled stone wool comes free of environmental burden, as it enters the product system as waste. Recycled fuels also come free of environmental burden, but their transport to the factory is accounted for. During the melting of raw materials pig iron is created in the cupola furnace. Pig iron is a co-product, which is subsequently sold to the market and economic allocation is applied. ROCKWOOL supplies district heating in the two factories in Denmark (Doense, Vamdrup) and in the factory in Trondheim (Norway). For the Danish factories, 7% and 20% of the heating energy consumed, respectively, is supplied and therefore allocated to district heating. The amount of excess heat to district heating, was substituted by using the energy content as the substitution key. The emissions associated with energy production have been substituted in the same way. Modules A1, A2 and A3 are to be declared as an aggregated Module A1-3.

The Construction Stage **A4-A5** includes:

- A4 transport to the building site
- A5 installation to the building

The transport in A4 is modeled by volume, as the most conservative approach. The default vehicle is the truck and all the values are based on annual average delivery data.

In A5 the default installation is assumed to be manual, therefore no energy consumption or ancillary equipment is needed. The product waste from installation is assumed to be 2% and according to the modularity principle of /EN15804/ its impacts are fully allocated to A5. The A5 stage includes also waste processing up to the end-of-waste state or disposal of final residues during the construction process stage and impacts and aspects related to product losses during installation. Finally, the A5 module includes also the corresponding end-of-life considerations for packaging. The credits from heat and electricity recovery from incineration, or material recycling from module A5 are attributed to module D.

The use-stage **B1-B7**, related to the building fabric includes:

- B1 use or application of the installed product
- B2 maintenance; ROCKWOOL products do not require maintenance during use in standard conditions and if correctly applied (according to manufacturer instructions). The default environmental impacts are in this case assumed to be zero
- B3 repair; ROCKWOOL products are not repaired during use in standard conditions and if correctly applied (according to manufacturers' instructions). The default environmental impacts are in this case assumed to be zero
- B4 replacement; ROCKWOOL Group products will not be replaced during use in standard conditions and if correctly applied (according to manufacturers' instructions). The default environmental impacts are in this case assumed to be zero
- B5 refurbishment; ROCKWOOL products are not refurbished during use in standard conditions and if correctly applied (according to manufacturers' instructions). The default environmental impacts are in this case assumed to be zero
- B6 – Operational energy use: ROCKWOOL products do not use energy during use of the building. The default environmental impacts are zero
- B7 – Operational water use: ROCKWOOL products do not use water during use of the building. The default environmental impacts are zero.

The End-of-life stage **C1-C4** includes:


- C1 de-construction, demolition
- C2 transport to waste processing
- C3 waste processing for reuse, recovery and/or recycling
- C4 disposal.

These stages also include provision and all transport, provision of all materials, products and related energy and water use.

Manual deconstruction is assumed for C1, therefore no impacts are assigned. The credits from disposal (heat or electricity recovery) are assigned to module D.

**Module D** includes reuse, recovery and/or recycling potentials expressed as net impacts and benefits. Here the credits for the packaging disposal in A5 and the recycling potential of ROCKWOOL material in C are considered.

The product system with the system boundaries is presented in the graph below:

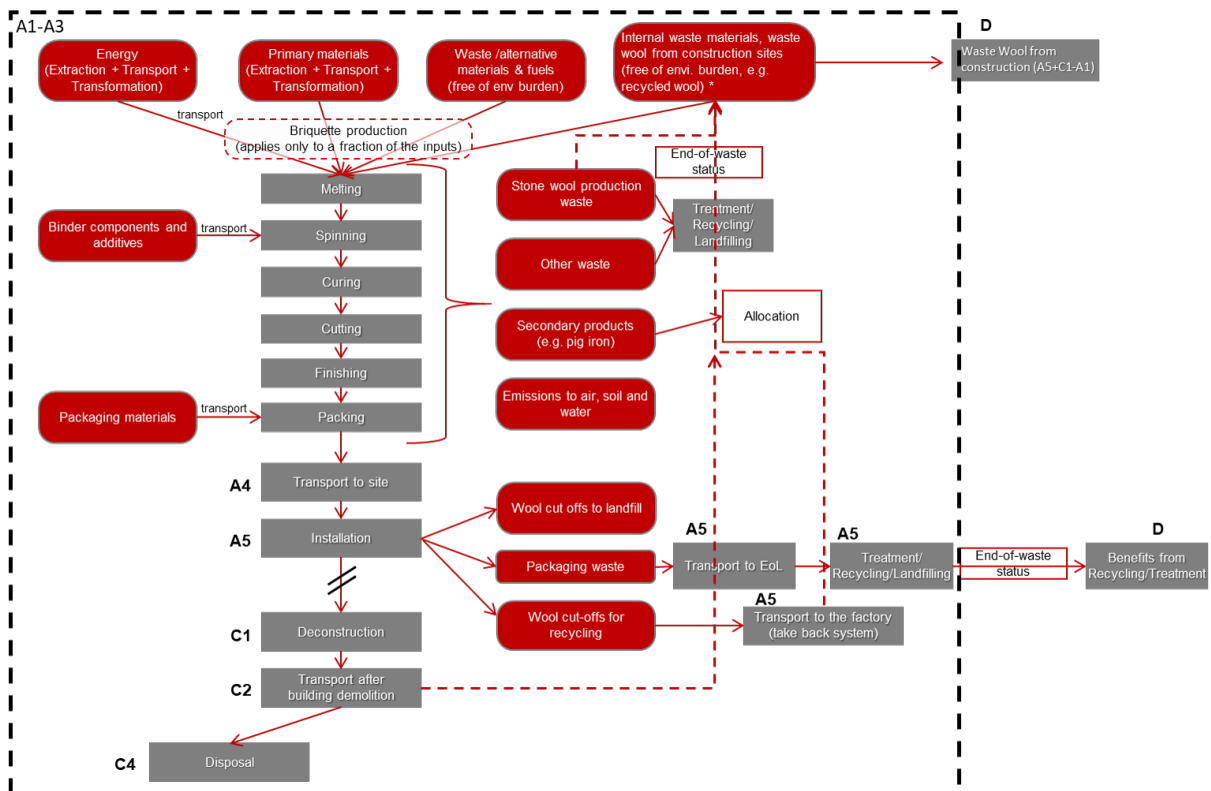

**Comparability**

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to /EN 15804/ and the building

context, respectively the product-specific characteristics of performance, are taken into account.

The used software for the development of the declaration was /GaBi/, version 8.0.1.257 by thinkstep.

**LCA: Scenarios and additional technical information**

The following technical information for the declared modules can be used for scenario development in a building context.

**Transport to the building site (A4)**

Name	Value	Unit
Litres of fuel /volumetric transport considered/	38	l/100km
Transport distance /weighted average from factory specific distances/	225	km
Capacity utilisation (including empty runs)	85	%
Gross density of products transported	25	kg/m <sup>3</sup>

The transport of the materials to the customer is modeled as a volumetric transport, meaning that the truck reaches its capacity with volume before its reaches it with mass. The same conservative approach is followed for all the products of this EPD, even for the ones with high density.

**Installation into the building (A5)**

Name	Value	Unit
Electricity consumption	0	kWh
Material loss	2	%

**Reference service life**

Name	Value	Unit
Reference service life (according to ISO 15686-1, -2, -7 and -8)	60	a

declared product properties	Product standards: EN 13162 "Thermal insulation products for buildings – Factory made mineral wool (MW) products – Specifications" EN 13172:2012 "Thermal insulating products – Evaluation of conformity Insulation Keymark Scheme" version 2.0, November 2016 EN 16783:2017 PCR for thermal insulation products EN 14064 "Thermal insulation products for buildings - In-situ formed loose-fill mineral wool (MW) products - Part 1 and 2"	
design application parameters including references to the appropriate practices	See installation guidelines. Installation to be conducted in accordance with manufacturers guidelines	
Quality of work assumption when installed in accordance with the manufacturers instructions	It is assumed that the manufacturer's instructions are clear and followed. In case of any uncertainty the manufacturer should be contacted for instructions	
Outdoor environment	Not for outdoor	

e.g. weathering, pollutants, UV and wind	application, except if specifically stated on the product, External Wall Insulation Systems (EWIS) and External Thermal Insulation Cladding System (ETICS).	
Indoor Environment temperature, moisture etc.	Not in direct contact with indoor environment, except if specifically stated on the product.	
Usage conditions e.g. frequency of use, mechanical exposure etc.	No usage conditions, except if specifically stated on the product. Please follow manufacturer's guidelines	
Maintenance e.g. required frequency, type and quality of replacement components	No maintenance is generally required, unless specifically stated on the product. Please refer to manufacturer guidelines	

#### End of life (C1 - C4)

Name	Value	Unit
Recycling	0.03	kg
Landfilling	0.97	kg
Transport to recycling	150	km
Transport to landfill	50	km
Utilisation rate	50	%

ROCKWOOL insulation products are fully recyclable. Currently ROCKWOOL has successfully established a recycling program in 5 countries including in the Nordics (Denmark, Sweden and Norway) and aims at increasing the number of countries in the future /ROCKWOOL Sustainability Report/. The benefits from recycling program are not thereby depicted in the assessment and the conservative approach of landfill is considered here.

#### Reuse, recovery and/or recycling potentials (D), relevant scenario information

Any declared benefits and loads from net flows leaving the product system that have not been allocated as co-products and that have passed the end-of-waste state are included in module D. Such declared benefits can for ROCKWOOL products occur in stages A5, C3 and C4. The generated energy, such as heat and electricity from waste incineration of packaging is assigned to module D. The benefits are calculated using current average substitution processes. The heat is credited for with heat from natural gas. The electricity is credited for with the specific country's electricity mix. This is also applied for materials that are landfilled as the avoided impact of electricity production and/or thermal energy recovery from landfill gas recovery is included in module D. For the recycling of stone wool it is important that no double counting occurs. The outputs of waste stone wool from modules A5 and C1 are considered linked to the inputs of waste stone wool into A1. Therefore only the net output flow (output from A5 plus C1 minus input to A1) is considered as a net output flow from the system and considered in Module D.

## LCA: Results

### DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE NOT DECLARED)

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	X	X	MNR	MNR	MNR	X	X	X	X	X	X	X

### RESULTS OF THE LCA - ENVIRONMENTAL IMPACT: 1 m2 of thermal insulation product with an R=1m2K/W

Parameter	Unit	A1-A3	A4	A5	B1	B2	B6	B7	C1	C2	C3	C4	D
GWP	[kg CO <sub>2</sub> -Eq.]	1.11E+0	1.24E-1	1.37E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	3.77E-3	0.00E+0	1.56E-2	-6.89E-2
ODP	[kg CFC11-Eq.]	2.98E-9	4.12E-14	1.99E-10	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	1.25E-15	0.00E+0	1.58E-14	-5.30E-14
AP	[kg SO <sub>2</sub> -Eq.]	5.97E-3	1.13E-4	1.53E-4	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	3.60E-6	0.00E+0	9.26E-5	-1.95E-4
EP	[kg (PO <sub>4</sub> ) <sup>3-</sup> -Eq.]	9.64E-4	2.36E-5	3.26E-5	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	7.66E-7	0.00E+0	1.26E-5	-1.49E-5
POCP	[kg ethene-Eq.]	3.89E-4	5.38E-7	1.24E-5	1.04E-10	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-4.72E-8	0.00E+0	7.28E-6	-2.66E-5
ADPE	[kg Sb-Eq.]	3.29E-7	9.86E-9	9.19E-9	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	3.00E-10	0.00E+0	5.61E-9	-1.13E-8
ADPF	[MJ]	1.35E+1	1.70E+0	4.25E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	5.16E-2	0.00E+0	2.02E-1	-1.85E+0

Caption: GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources

### RESULTS OF THE LCA - RESOURCE USE: 1 m2 of thermal insulation product with an R=1m2K/W

Parameter	Unit	A1-A3	A4	A5	B1	B2	B6	B7	C1	C2	C3	C4	D
PERE	[MJ]	2.42E+0	8.55E-2	9.37E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	2.60E-3	0.00E+0	2.44E-2	-2.61E-1
PERM	[MJ]	1.26E+0	0.00E+0	-9.04E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PERT	[MJ]	3.68E+0	8.55E-2	3.37E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	2.60E-3	0.00E+0	2.44E-2	-2.61E-1
PENRE	[MJ]	1.15E+1	1.70E+0	2.19E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	5.18E-2	0.00E+0	2.10E-1	-1.97E+0
PENRM	[MJ]	2.47E+0	0.00E+0	-6.31E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PENRT	[MJ]	1.40E+1	1.70E+0	1.56E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	5.18E-2	0.00E+0	2.10E-1	-1.97E+0
SM	[kg]	2.86E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-8.27E-3
RSF	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
NRSF	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
FW	[m <sup>3</sup> ]	4.86E-3	1.58E-4	2.85E-4	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	4.81E-6	0.00E+0	3.99E-5	-8.11E-4

Caption: PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

### RESULTS OF THE LCA – OUTPUT FLOWS AND WASTE CATEGORIES:

#### 1 m2 of thermal insulation product with an R=1m2K/W

Parameter	Unit	A1-A3	A4	A5	B1	B2	B6	B7	C1	C2	C3	C4	D
HWD	[kg]	3.29E-7	8.93E-8	2.24E-10	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	2.72E-9	0.00E+0	3.31E-9	-6.20E-10
NHWD	[kg]	1.84E-1	1.30E-4	7.42E-3	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	3.96E-6	0.00E+0	9.72E-1	-1.14E-3
RWD	[kg]	1.07E-4	2.32E-6	1.35E-5	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	7.06E-8	0.00E+0	2.86E-6	-7.48E-6
CRU	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MFR	[kg]	0.00E+0	0.00E+0	2.81E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	2.70E-2	0.00E+0	0.00E+0
MER	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EEE	[MJ]	0.00E+0	0.00E+0	1.06E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EET	[MJ]	0.00E+0	0.00E+0	3.18E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0

Caption: HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EEE = Exported thermal energy

## References

/Construction Products Regulation (CPR) EU, Nr. 305/2011/

Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 laying



down harmonized conditions for the marketing of construction products and repealing Council Directive 89/106/EEC Text with EEA relevance.

**/EN 822/**

EN 822:2013:  
Thermal insulating products for building applications.  
Determination of length and width.

**/EN823/**

EN 823:2013:Thermal insulating products for building applications. Determination of thickness.

**/EN826/**

EN 826:2013:  
Thermal insulating products for building applications.  
Determination of compression behavior.

**/EN 1604/**

EN 1604: 2013: Thermal insulating products for building applications. Determination of dimensional stability under specified temperature and humidity conditions.

**/EN 1607/**

EN 1607:2013:  
Thermal insulating products for building applications.  
Determination of tensile strength perpendicular to faces.

**/EN 12086/**

EN 12086:2013: Thermal insulating products for building applications. Determination of water vapour transmission properties.

**/EN 12430/**

EN 12430:2013: Thermal insulating products for building applications. Determination of behavior under point load.

**/EN 12431/**

EN 12431:2013: Thermal insulating products for building applications. Determination of thickness for floating floor insulating products.

**/EN 12667/**

EN 12667:2001: Thermal performance of building materials and products. Determination of thermal resistance by means of guarded hot plate and heat flow meter methods. Products of high and medium thermal resistance.

**/EN 12939:2001/**

EN 12939:2001: Thermal performance of building materials and products. Determination of thermal resistance by means of guarded hot plate and heat flow meter methods. Thick products of high and medium thermal resistance.

**/EN 13162/**

EN 13162:2008: Thermal insulation products for buildings. Factory made mineral wool (MW) products. Specification

**/EN 13501/**

EN 13501-1:2007+A1:2009: Fire classification of construction products and building elements. Classification using test data from reaction to fire tests.

**/EN 14064-1/**

En 14064-1:2010: Thermal insulation products for buildings. In-situ formed loose-fill mineral wool (MW) products. Specification for the loose-fill products before installation.

**/ISO 15686/**

ISO 16686 series of standards: Buildings and constructed assets -- Service life planning.

**/EN29052-1/**

EN 29052-1:1992: Acoustics - Determination of dynamic stiffness - Part 1: Materials used under floating floors in dwellings (ISO 9052-1:1989).

**/EUCEB/**

Website of European Certification Board for mineral wool products: <http://www.euceb.org/> [Accessed: January 2019].

**/GaBi ts/**

Leinfelden - Echterdingen GaBi Software - System and Database for Life cycle Engineering. Thinkstep AG, LBP, University of Stuttgart and PE. Program version 8.0.1.257,database schema 8006 International, 2011.

**/GaBi-Dokumentation/**

Thinkstep AG: GaBi 6 life cycle inventory data documentation, 2018.  
<http://www.gabisoftware.com/support/gabi/gabi-6-licidocumentation> [Accessed: January 2019].

**/IBU PCR - Part A/**

Calculation rules for the Life Cycle Assessment and Requirements on the Background Report, version 1.6, Institut Bauen und Umwelt e.V., [www.bau-umwelt.com](http://www.bau-umwelt.com), November 2017.

**/IBU 2017, PCR, Part B/**

PCR- Part B: Requirements on the EPD for mineral insulating products, Institut Bauen und Umwelt e.V., [www.bau-umwelt.com](http://www.bau-umwelt.com), November 2017.

**Regulation (EC) No 1272/2008 - REACH**

Regulation (EC) No 1272/2008 of the European parliament and of the council of 16 December 2008 on classification, labeling and packaging of substances and mixtures. Available at: <https://eurlex.europa.eu/legalcontent/EN/TXT/?uri=celex:32008R1272> [Accessed: March 2019].

**/ROCKWOOL Sustainability Report/**

"Building tomorrow today": sustainability report from ROCKWOOL Group, 2017. Available at: [https://cdn01.rockwoolgroup.com/globalassets/sustainability/sustainability-report/2017\\_ROCKWOOL-Sustainability-Report.pdf?f=20180518042225](https://cdn01.rockwoolgroup.com/globalassets/sustainability/sustainability-report/2017_ROCKWOOL-Sustainability-Report.pdf?f=20180518042225) [Accessed: February 2019]

**/IBU 2016/**

IBU (2016): General Programme Instructions for the Preparation of EPDs at the Institut Bauen und Umwelt e.V., Version 1.1 Institut Bauen und Umwelt e.V., Berlin.  
[www.ibu-epd.de](http://www.ibu-epd.de)

**/ISO 14025/**

DIN EN /ISO 14025:2011-10/, Environmental labels and declarations — Type III environmental declarations — Principles and procedures

**/EN 15804/**  
/EN 15804:2012-04+A1 2013/, Sustainability of  
construction works — Environmental Product

Declarations — Core rules for the product category of  
construction products



**Publisher**  
Institut Bauen und Umwelt e.V.  
Panoramastr. 1  
10178 Berlin  
Germany

Tel +49 (0)30 3087748- 0  
Fax +49 (0)30 3087748- 29  
Mail [info@ibu-epd.com](mailto:info@ibu-epd.com)  
Web [www.ibu-epd.com](http://www.ibu-epd.com)



**Programme holder**  
Institut Bauen und Umwelt e.V.  
Panoramastr 1  
10178 Berlin  
Germany

Tel +49 (0)30 - 3087748- 0  
Fax +49 (0)30 - 3087748 - 29  
Mail [info@ibu-epd.com](mailto:info@ibu-epd.com)  
Web [www.ibu-epd.com](http://www.ibu-epd.com)



**Author of the Life Cycle  
Assessment**  
ROCKWOOL International A/S  
Hovedgaden 584  
2640 Hedehusene  
Denmark

Tel +45 46 56 03 00  
Fax +45 46 56 33 11  
Mail [info@rockwool.com](mailto:info@rockwool.com)  
Web [www.rockwoolgroup.com](http://www.rockwoolgroup.com)



**Owner of the Declaration**  
ROCKWOOL International A/S  
Hovedgaden 584  
2640 Hedehusene  
Denmark

Tel +45 46 56 03 00  
Fax +45 46 56 33 11  
Mail [info@rockwool.com](mailto:info@rockwool.com)  
Web [www.rockwoolgroup.com](http://www.rockwoolgroup.com)

# Annex 1

## Self declaration from EPD owner

### Specific Norwegian requirements

#### 1 Applied electricity data set used in the manufacturing phase

The selection of the background data for the electricity generation is in line EN 15804. Within the different plants the country specific Danish or Norwegian power grid mix (reference year 2017) is applied.

<0,00985 kg CO<sub>2</sub> eqv/MJ> (Norwegian power mix year according to GaBi 8.0 database)

<0,115 kg CO<sub>2</sub> eqv/MJ> (Danish power mix year according to GaBi 8.0 database)

#### 2 Content of dangerous substances

- The product contains no substances given by the REACH Candidate list or the Norwegian priority list.
- The product contains substances that are less than 0.1% by weight given by the REACH Candidate or the Norwegian priority list.
- The product contains dangerous substances more than 0.1% by weight given in the REACH candidate list or the Norwegian Priority List, concentrations is given in the EPD:

Dangerous substances from the REACH candidate list or the Norwegian Priority List	CAS No.	Quantity (concentration, wt%/FU(DU)).
Substance 1		
Substance n		

#### 3 Transport from the place of manufacture to a central warehouse

Transport distance and CO<sub>2</sub>-eqv./DU from transport of the product from factory gate to central warehouse in Oslo shall be given.

The transport distance here is set as a weighted average, based on the transport distances from all four Nordic factories to Oslo.

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy use	Unit	Value (l/t)	CO <sub>2</sub> -eqv./DU
Boat	48%	Container Ship	107	4,23E-04	Kg HFO/kg of cargo	0,346	1,34E-03
Truck*	13%	Truck, Euro 6, 17,3t payload	259	0,38	l/km	44,73	69,8E-03
Railway							
Total							



\*The capacity utilization has been modelled based on volumetric capacity modelling for low density products as a conservative case. This means that the truck will be filled with volume before is filled with mass. For high density products the capacity utilization will be higher.

## 4 Impact on the indoor environment

Indoor air emission testing has been performed; specify test method and reference:

The products meet the requirements for low emissions (M1) and requirements according to EN15251: 2007 Appendix E.

ROCKWOOL products are recognized by the M1 label. M1 certificates will be provided on request.

No test has being performed

Not relevant; specify \_\_\_\_\_