
For extreme cold and heat

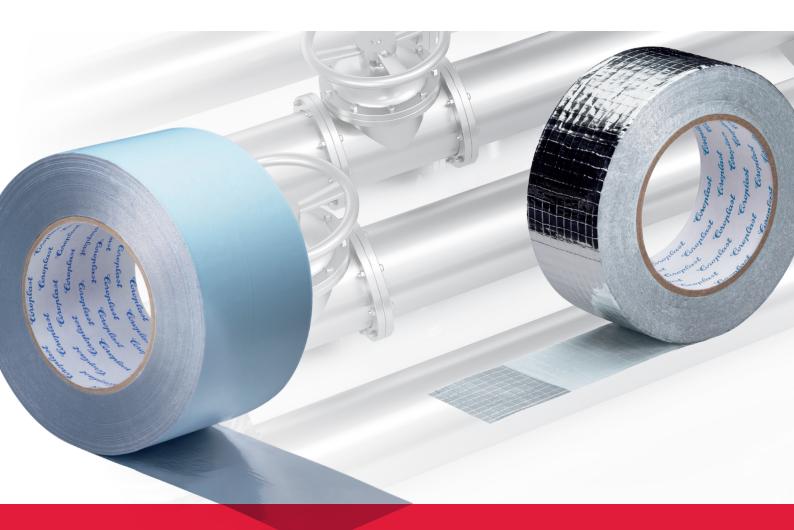

Coroplast AWX series

Coroplast aluminum adhesive tapes from the AWX series are always the right choice for long-lasting and secure bonding under extreme conditions for aluminum insulation systems. The AWX series offers you security, particularly for buildings with high fire protection standards:

- Building material class A2 and B1 in accordance with DIN 4102
- Outstanding adhesion to metallic surfaces and the back side of adhesive tapes
- Adhesion to surfaces exposed to condensation (e.g. morning dew)
- Can be used in frost and extremely low outdoor temperatures to -25°C
- Resistant to subsequent exposure to moisture adhesive does not absorb water
- Heat resistant in extreme ambient temperatures of up to +130°C
- Very good shear strength, even when exposed to high ambient temperatures

Keeping you connected.




Security and quality have a name

More benefits for you:

- Visible name-brand quality Coroplast inscribed in the core of the roll
- External monitoring: In accordance with DIN 4102 and the German BG Verkehr/Schiffssicherheit
- Internal monitoring: Manufactured in accordance with automotive standard ISO TS 16949
- > Customized widths available, from 20 mm to 1,000 mm
- Adhesive tape widths are manufactured without a low-end tolerance
- Non-tension manufacturing eliminates curling effect and prevents waste
- Everything you need is included: instructions, application tool, certification, batch number, etc.
- Adhesive tape width is clearly marked with a colored sticker on the packaging

The standard in aluminum adhesive tape: the Coroplast AWX series



Technical data	1510 AWX	1530 AWX	1542 AWX	912 AWX
Flammability	B1	B1/A2	B1 and A+ (low VOC)	-
Width	50, 75 and 100 mm	50, 75 and 100 mm	50, 75 and 100 mm	50, 75 and 100 mm
Length	100 m	100 m	100 m	50 m
Packaged unit	24, 16 and 12	24, 16 and 12	24, 16 and 12	24, 18 and 12

Coroplast Fritz Müller GmbH & Co. KG
Tapes – Cables – Cable Assemblies
Wittener Straße 271, 42279 Wuppertal, Germany
T +49 202 2681-221, tapes@coroplast.de
www.coroplast.de



