


1517CW

ALUMINUM FOIL TAPE

VentureTape® 1517CW is a 1.2 mil (30 µm) dead soft aluminum foil coated with a cold weather solvent acrylic pressure sensitive adhesive. The malleable foil applies easily to both fibrous and sheet metal ducts and conforms to irregular surfaces. VentureTape 1517CW excels in demanding temperature and humidity applications and provides superior performance and durability over a wide range of environmental conditions.

Product Construction

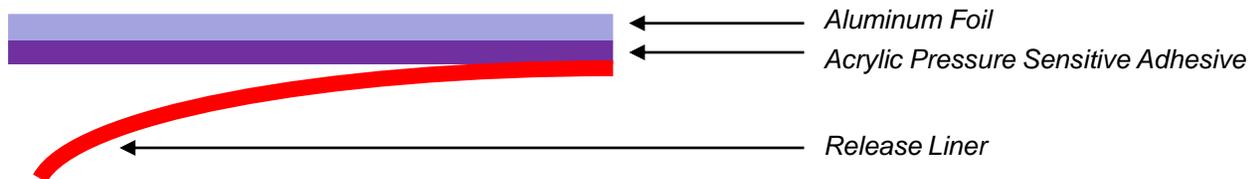

Features & Benefits

- UL723 Listed (5/10 Flame/Smoke Rating)
UL file # R10984
- DIN 4102-A2
- BS476 parts 6 & 7 class 0
- U.S. Coast Guard Approved (CGA # 164.112/1121/WCL MED0284TE)
- IMO Resolution A653(16)
- IMO Resolution MSC 61(67) Annex 1 Part 5 and Annex 2 IMO Resolution MSC 61(67) Annex 1 Part 2 and Annex 2
- Ideal for use as a vapor seal for reinforced fiberglass or mineral wool thermal insulation
- May also be used on FSK systems

Test	Typical Value	Typical Value (Metric)	Test Method
Product Thickness ^Ω	2.4 mils	0.06 mm	PSTC-133
Peel Adhesion ^Δ	35 oz/in	9.7 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	12.5 lb/in	56.5 N/25 mm	PSTC-131
Elongation	5%	5%	PSTC-131
Service Temperature	-40 to 250 °F	-40 to 121 °C	

^Ω - excluding liner

^Δ - 20 minute dwell

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

Product Configurations

- Standard length: 50Y
- Standard and custom lengths available, contact Venture Tape for specifications and requirements

Contact Venture Tape today for a complete list of products or a free sample

Toll Free North America 800-343-1076

From United Kingdom 0-800-962-957

From Australia 1-800-122-797

www.venturetape.com

The logo features the brand name "VentureTape" in a bold, purple, sans-serif font. Above the text are three horizontal red lines of varying lengths, creating a stylized graphic element. A registered trademark symbol (®) is located to the upper right of the text.

USA

Venture Tape Corp.
30 Commerce Road
Rockland, MA 02370
781-331-5900
FAX 781-871-0065

Europe – Venture Tape

Venture Tape Europe Corp.
1 Sopwith Way
Drayton Fields Industrial Estate
Daventry, Northampton NN11 8PB
(0) 1327 876555
FAX (0) 1327 876444

Australasia

Venture Tape Australasia, Pty., Ltd.
11B Production Drive
Campbellfield 3061 Victoria
Australia
(03) 9357 6025
FAX (03) 9357 6045